



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Metal-Out Static Shielding Bag 2100R/2110R



The transparent, puncture resistant metal-out static shielding bag is designed to provide static safe packaging for the shipment and/or storage of ESD sensitive items including outside ESD protected areas. The metal layer is positioned near the outer surface to help reduce voltage retention and enhance static decay. Bags are printed with an ESD protective symbol and a lot code for traceability. Open Top (2100R) and ZipTop (2110R) styles are available. The bags are heat sealable.

SCS Static Shielding Bags are manufactured from a top coat, metal, polyester, polyethylene laminate. The proprietary top coating is designed to protect the metal layer. Polyester dielectric, in concert with the metal layer, provides shielding of Electrostatic Discharge (ESD) to minimize the penetration of electric fields and discharges.

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3


Physical	Typical Value	Testing Method
Tensile Strength	8000 PSI, 55 MPa	ASTM D882
Puncture Resistance	24 lbs, 106 N	MIL-STD-3010C Method 2065
Seal Strength	18 lbs, 80 N	ASTM D882
Thickness	3.2 mils, 0.081 mm +/-10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	37%	Tobias

Electrical	Typical Value	Testing Method
ESD Shielding	<10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	$1 \times 10^4$ to $<1 \times 10^{11}$ ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	$1 \times 10^4$ to $<1 \times 10^6$ ohms	ANSI/ESD STM11.11

Charge Retention	<100 volts	SCS Test Method 1410.515
------------------	------------	--------------------------

Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR

Heat Sealing Conditions	Typical Value
Temperature	375°F, 190°C
Time	0.5 – 3.5 seconds
Pressure	30 – 70 PSI, 206 – 482 KPa

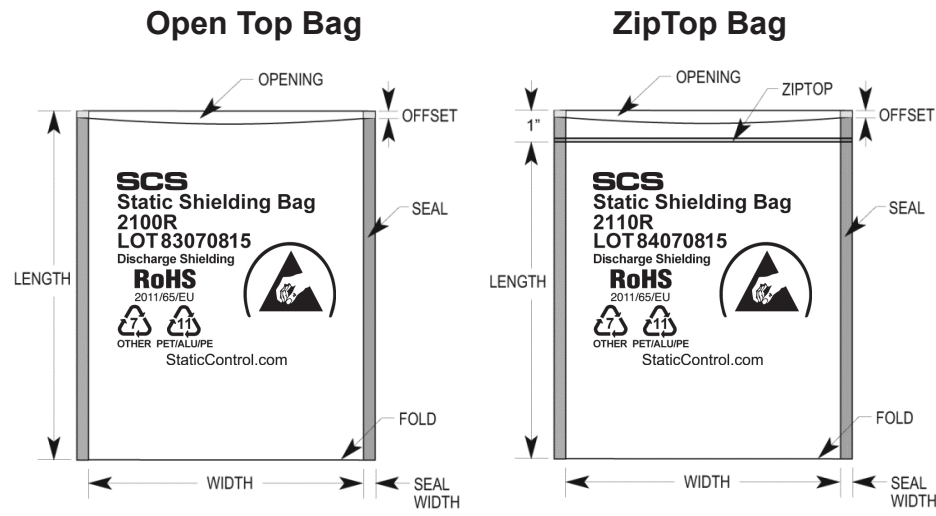


Tolerance: Width -0, +1/4"  
 Length +/- 1/8" Offset 0 to 1/4"  
 Seal width 3/8" with a tolerance of +/- 1/8"

Note: Standard bag markings shown above and are not to scale.

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

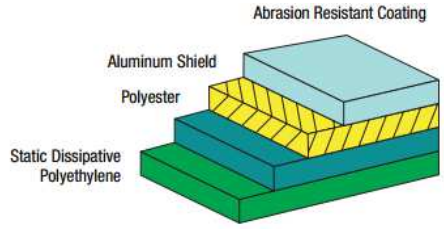

Made in the United States of America with Globally Sourced Materials.

Specifications and procedures subject to change without notice.

**RoHS 2, REACH, and Conflict Minerals Statement**  
 None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product.  
 Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE.  
 See [SCS Warranty, Limitation of Liability and Remedies](#)

2100R/2110R SERIES METAL-OUT STATIC SHIELDING BAG		
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	<b>DRAWING NUMBER</b> 2100R/2110R	<b>DATE</b> July 2015

