



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



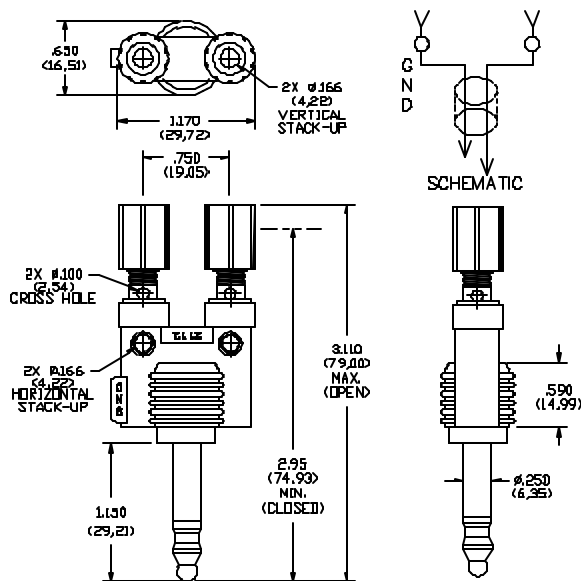

FEATURES:

- Permits single or double banana plug to be used with equipment having three circuit phone jacks.
- Tip connected to hot side of adapter and ring connected to ground side.
- Sleeve. No connection.
- Cross holes 4.2 (.166) dia. in plug body provide side stackup.

MATERIALS:

Upper Conn: Binding Posts

Material: Body & Collars; Brass, Comm'l, H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plated per QQ-N-290, Class 2, .0002/.0003.

Insulation: Polycarbonate molded to collars.

Color: One red, one black.

Operating Temperature: +115° C. (+239°F.) Max.

Body Insulation: Acrylonitrile – Butadiene – Styrene, molded to Binding Posts and Phone Plug.

Color: Black.

Operating Temperature: +50° C. (+122° F.) Max.

Marking: "POMONA ELECTRONICS 2112."

Lower Conn: Phone Plug, PJ-051 per MIL-P-642.

RATINGS (Entire – Assembly):

Operating Temperature: +50° C. (+122° F.) Max.

Operating Voltage: 500 VRMS.

Current: 5 Amperes Cont.

ORDERING INFORMATION: Model 2112

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA