



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
N4		REVISED PER ECO-12-009700	23MAY12	KH	DR
P		REVISED PER ECO-17-009310	28JUN2017	RS	MZ
R		REVISED PER ECO-17-011181	05AUG2017	RS	MZ

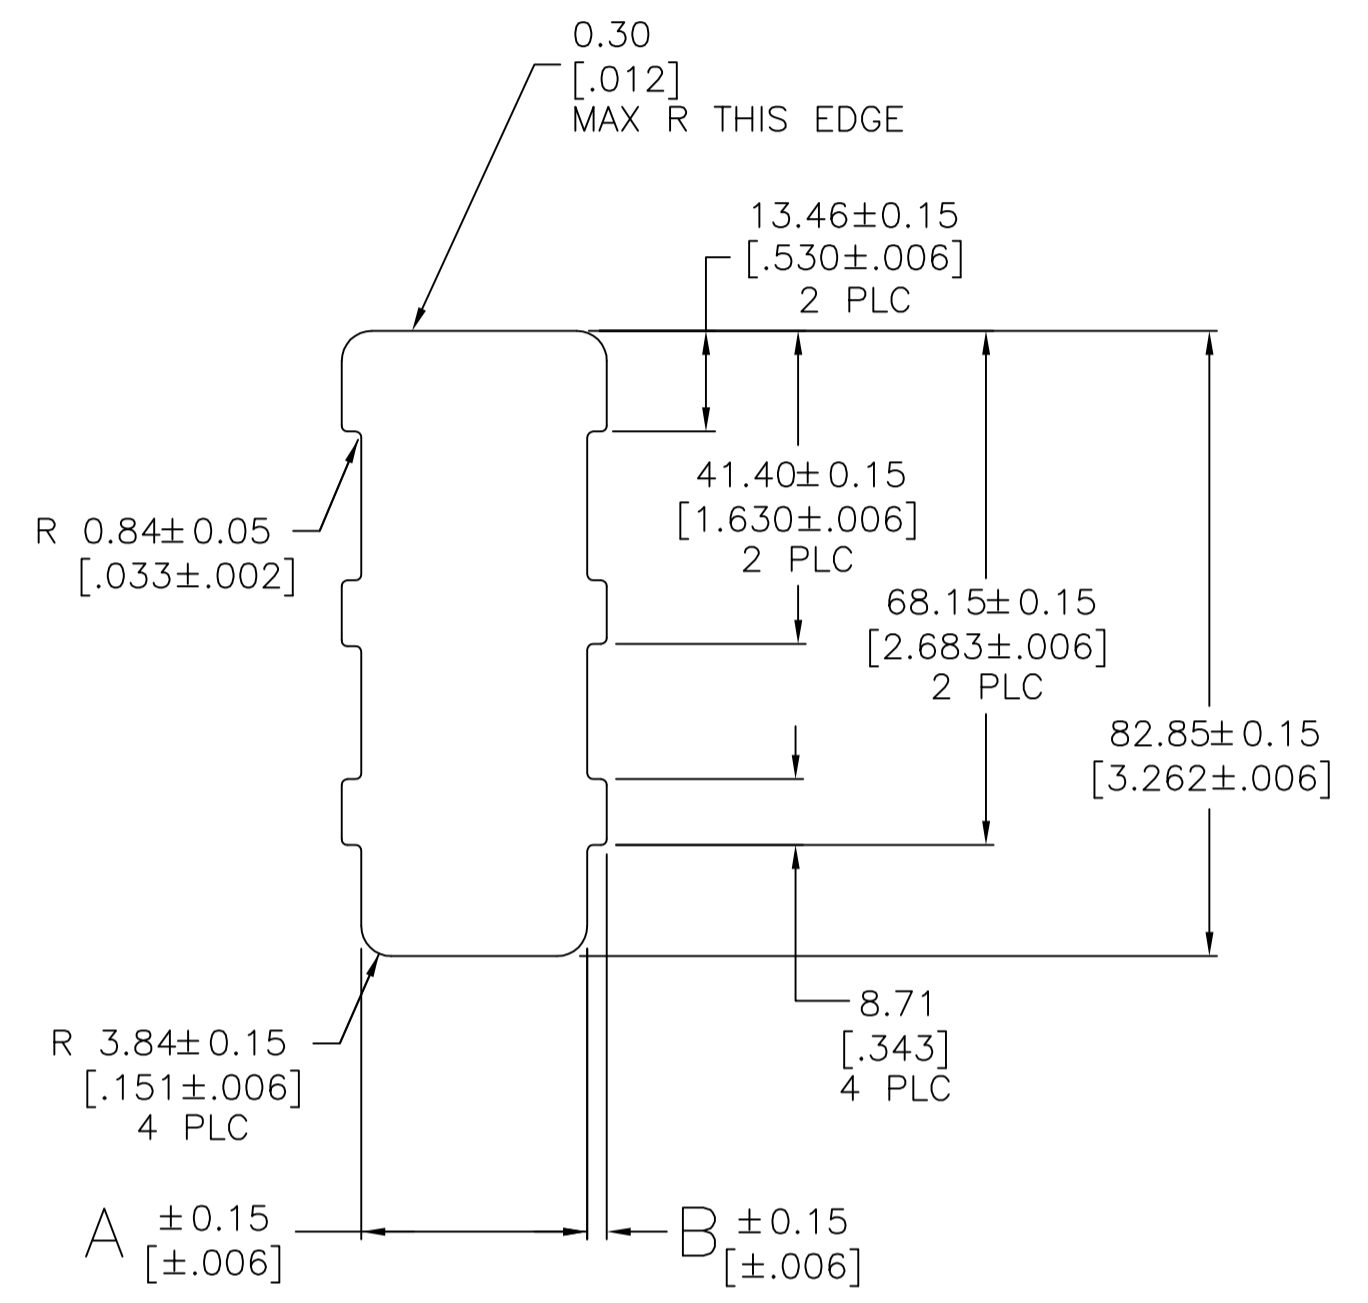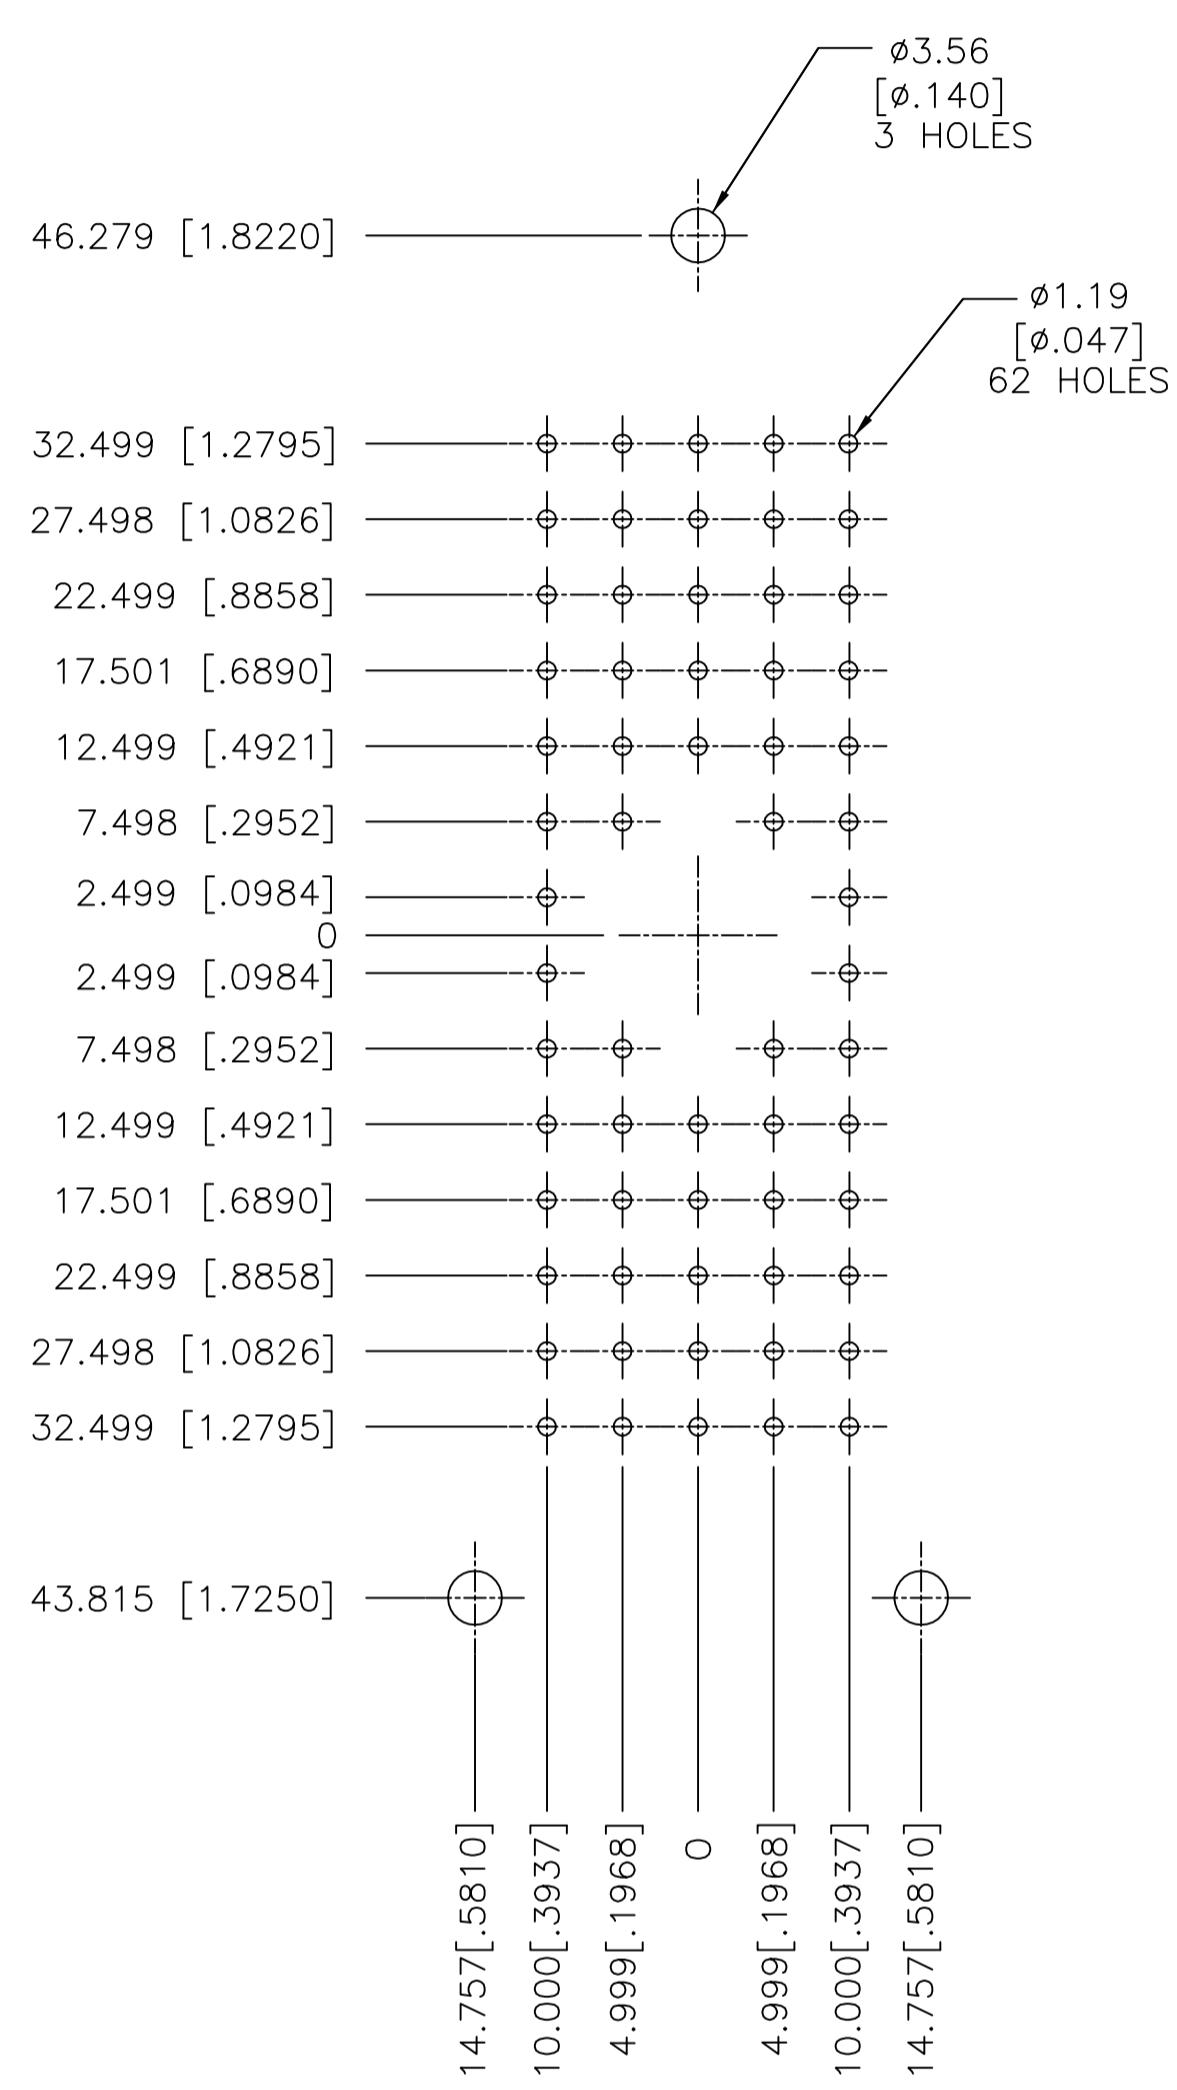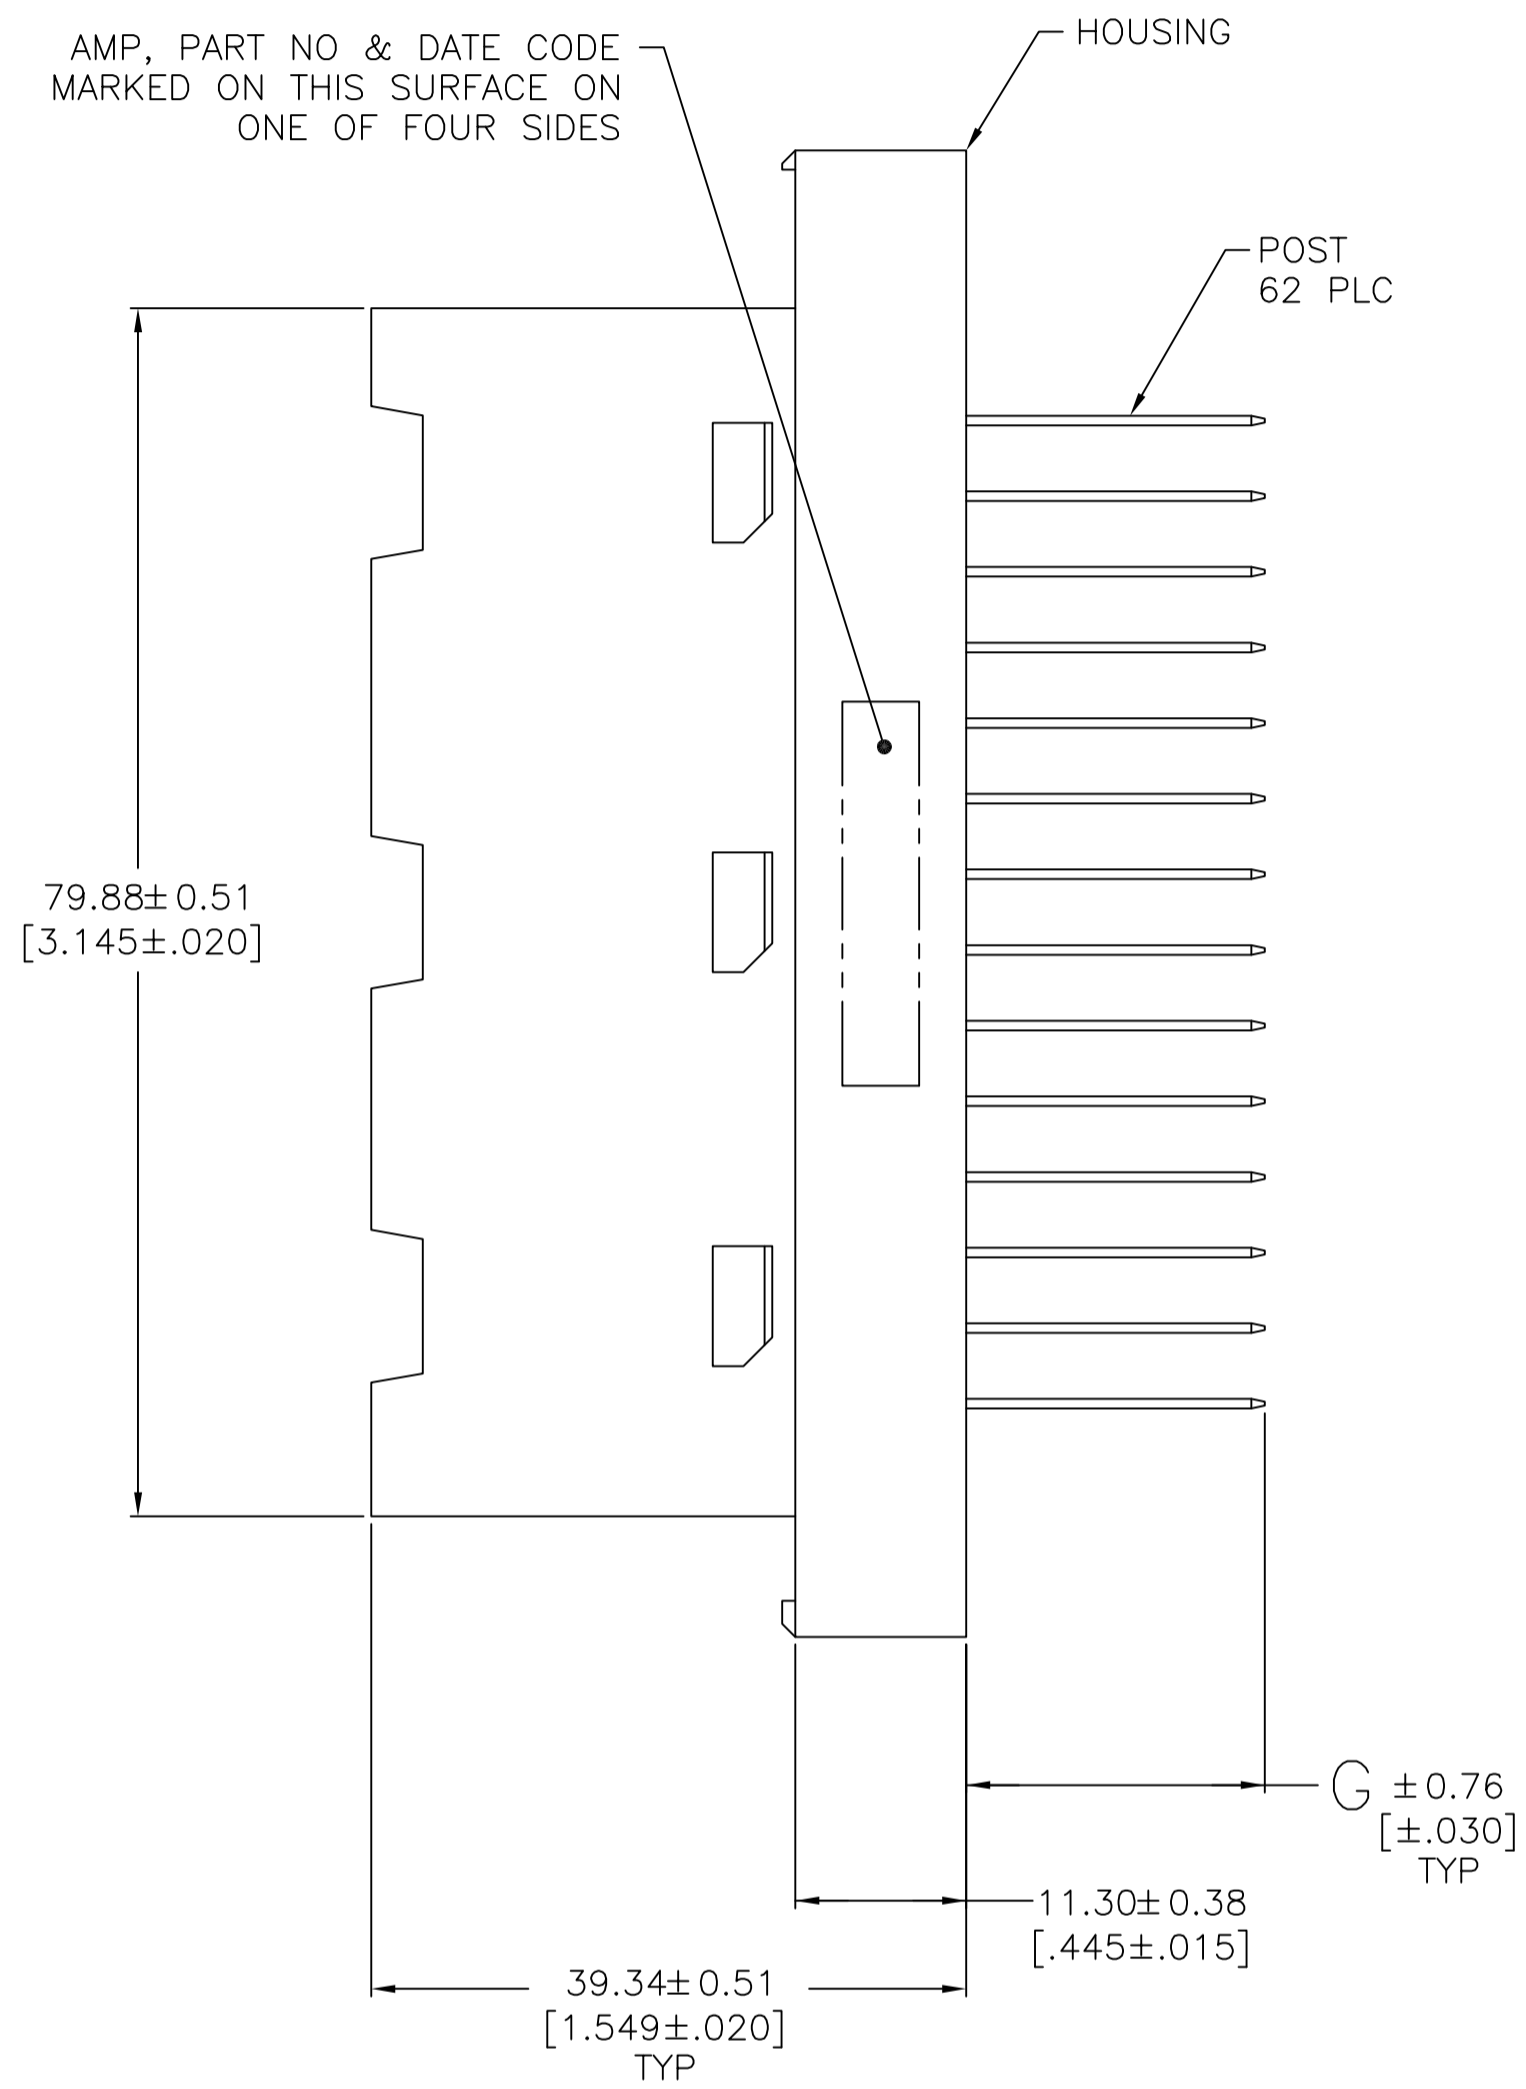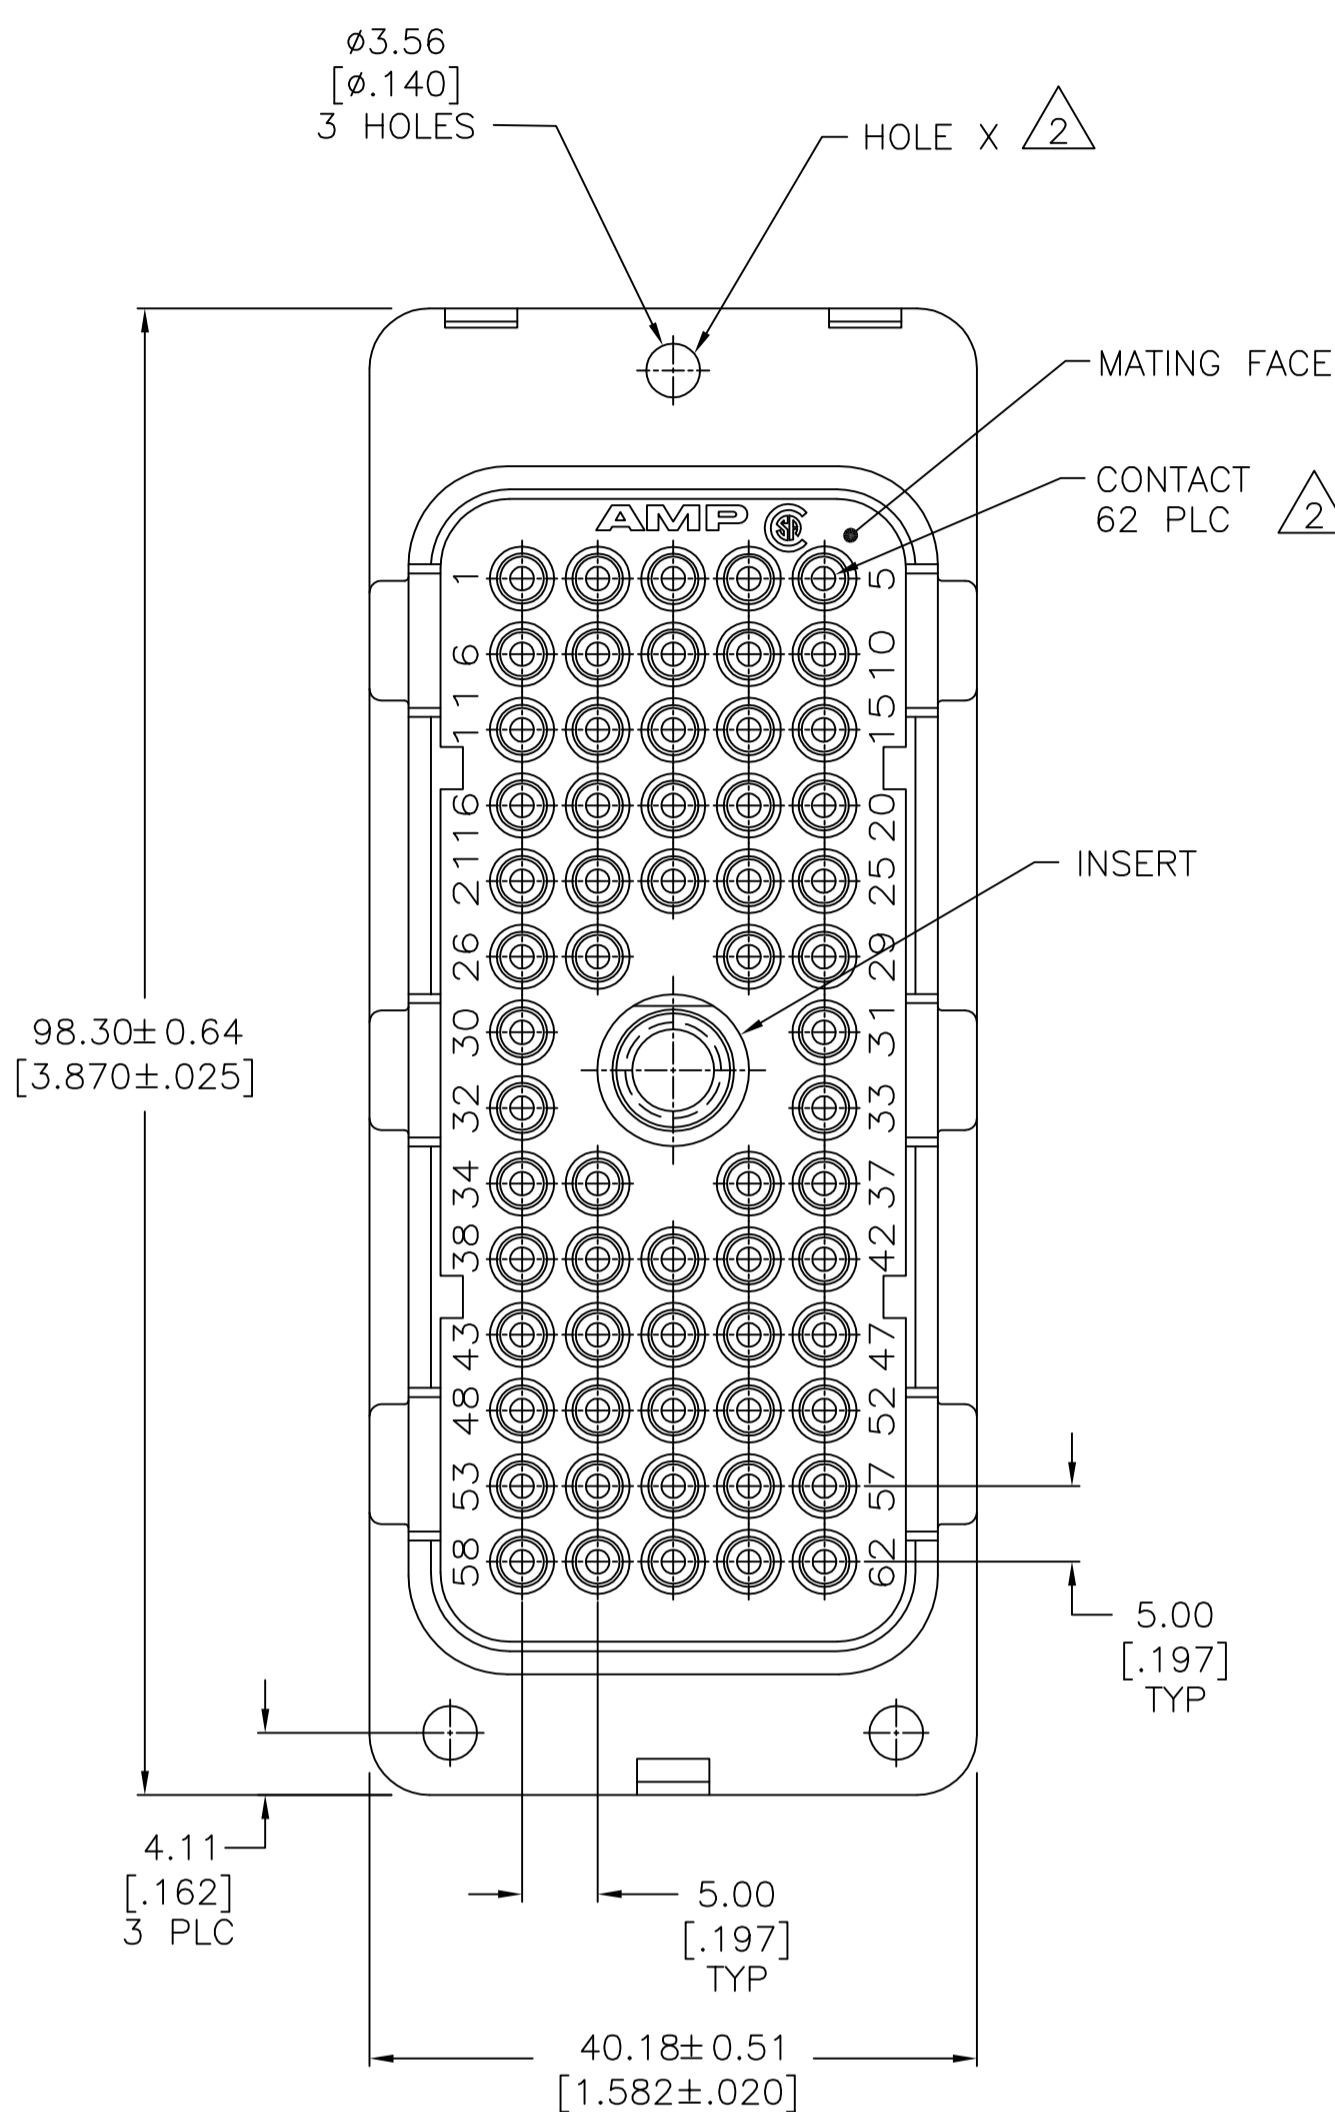

RECOMMENDED PANEL CUTOUT Δ
SCALE 1:1

RECOMMENDED PC BOARD LAYOUT

1.75 [.069]	32.36 [1.274]	1.40-1.98 [.055-.078]
2.74 [.108]	30.05 [1.183]	0.79-1.40 [.031-.055]
B	A	PANEL THICKNESS

- Δ 1 PANEL CUTOUT FOR REAR MOUNTED PIN BLOCK.
- Δ 2 SEAMS OF ALL PINS TO BE ORIENTED TOWARD HOLE X SIDE.
- Δ 3 POLYESTER, BLACK.
- Δ 4 0.76 μ m [.000030] MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 6.35 [.250] MIN FROM MATING END, GOLD FLASH ON REMAINDER, BOTH OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290.
- Δ 5 2.54 μ m [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER 2.54 μ m [.000100] MIN COPPER PER MIL-C-14550.
- Δ 6 2.54 μ m [.000100] MIN TIN PER MIL-T-10727 OVER 2.54 μ m [.000100] MIN COPPER PER MIL-C-14550.
- Δ 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	5	4	5.59 [.220]	211580-6
	6	4	3.56 [.140]	211580-5
	6	4	19.76 [.778]	211580-4
	5	4	3.56 [.140]	211580-3
	5	4	19.76 [.778]	211580-2
	POST FINISH	CONTACT FINISH	G	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN L SIZE 09/09/92
CHK R.STONE 10-15-92
APVD -

DIMENSIONS: mm [INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.13 [.005]
3 PLC	± 0.013 [.0005]
4 PLC	± -
ANGLES	± -

MATERIAL FINISH WEIGHT -

SIZE A1 CAGE CODE DRAWING NO 00779 ©=211580 RESTRICTED TO -

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV R

STE TE Connectivity
CONNECTOR BLOCK FOR PINS WITH FEMALE JACKSCREW THREAD, 62 POSN, METRIMATE