



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SR 16



tightening torque/thread	4.0 Nm/M 5	Inspection Test Pattern Size	B 7
Type	Cat.-No.		Qty.p.pck.
SR 16	41050.2	beige	50
SR 16	41050.5	blue	50

Ratings:


	UL	CSA	DIN-VDE	IEC
Rated Voltage	600 V	600 V	611 750 V	947-7-1 800 V
Rated Current	85 A AWG 6	70 A	82 A	76 A

Max Rated Cross Section

Single Wire (solid)	2.5-25 mm ²
Stranded Wire (flexible)	2.5-16 mm ²
Wire Size	AWG 12-4

Dimensions	TS 32	TS 35
LxBxH (mm)	50x12x63	50x12x58
Stripped Length	15 mm	

SR 35

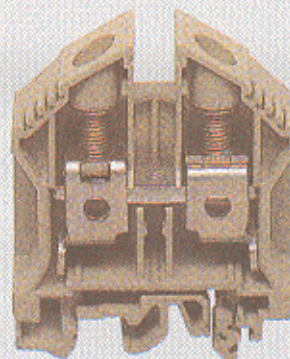

tightening torque/thread	5.0 Nm/M 6	Inspection Test Pattern Size	B 8
Type	Cat.-No.		Qty.p.pck.
SR 35	41052.2	beige	20
SR 35	41052.5	blue	20

Ratings:

	UL	CSA	DIN-VDE	IEC
Rated Voltage	600 V	600 V	611 750 V	947-7-1 800 V
Rated Current	115 A AWG 2	100 A	135 A	125 A

Max Rated Cross Section

Single Wire (solid)	2.5-50 mm ²
Stranded Wire (flexible)	2.5-35 mm ²
Wire Size	AWG 12-2

Dimensions	TS 32	TS 35
LxBxH (mm)	58x16x76	58x16x71
Stripped Length	20 mm	

Type:	Cat.-No.	Qty.p.pck.	Terminal accessories	Type:	Cat.-No.	Qty.p.pck.
AP 16	2104.2 beige 2104.5 blue	20	End plate	AP 35	2116.2 beige 2116.5 blue	20
TW 16	2105.2 beige 2105.5 blue	20	Isolation partition	TW 35	2117.2 beige 2117.5 blue	20
TRS 1	2003.2 beige	100	Separator			
ES 32/35 Combi	1424.2 beige		End bracket	ES 32/35 Combi	1424.2 beige	
ES 32/K/ST	2827.0	50		ES 32/K/ST	2827.0	50
ES 35/2/K	2826.2 beige		End bracket	ES 35/K/ST	2828.0	
ES 35/K/ST	2828.0	50		HES 35ST	2761.0	50
STB 14/4	2050.0	50	Test socket	STB 16/4	2127.0	50
PS 4	2051.0	20	Test plug	PS 4	2051.0	20
QL 2	2106.0	50	Switchable link			
VH 19	2009.0	100	Connection sleeve			
BS M 3x25	2010.0	100	Screw			
AD 16	2819.0	20	Warning tag (German)	AD 35	2820.0	20
			Warning tag (English)			
			Plastic screw for warning tag			
Q2	2112.0	20	Cross-connection			Cross-connection
Q3	2113.0	20	Cross-connection			see page 64
Q4	2114.0	10	Cross-connection			
Q10	2115.0	10	Cross-connection			

TERMINAL BLOCKS