



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Metallized Polypropylene Film Capacitors

+105°C Epoxy Dipped, Radial Lead


FEATURES

Small size - Low ESR - Good Pulse Capabilities - Stable with Frequency and Temperature

APPLICATIONS

General Purpose - Switching Power Supplies - Blocking - Coupling - AC Applications (Not across the Line)

Operating Temperature Range	-55°C to +105°C					
Capacitance Tolerance	±10% at 1 kHz, 25°C ±5% optional					
Peak, AC voltage (50/60 Hz)	WVDC	100	250	400	630	1000
	VAC	63	200	220	250	300
For T>+85°C, The voltage must be decreased by 1.5% per °C						
Dissipation Factor (MAX) 25°C	Frequency (kHz)	C≤0.1uF		0.1uF<C≤1uF		1uF<C≤3uF
	1	0.1%		0.1%		0.1%
	100	0.4%		0.7%		1.2%
Insulation Resistance @25°C (<70% RH) for 1 minute at 100VDC applied	Capacitance	Insulation Resistance				
	≤0.33μF	30000 MΩ				
	>0.33μF	10000 MΩxμF				
Load Life	2000 Hours, +85C with 125% of rated voltage					
	Capacitance Change	≤3% of initially measured value				
	Dissipation Factor	≤0.001 at 1kHz and 25°C				
	Insulation Resistance	≥50% of maximum specified value				
Damp Heat test	56 days at 40°C with 90 to 95%RH, +40°C and no voltage applied					
	Capacitance Change	≤3% of initially measured value				
	Dissipation Factor	≤0.001 at 1kHz and 25°C				
	Insulation Resistance	≥50% of maximum specified value				
Self Inductance	<1 nano-Henry per mm of body length and lead length					
Capacitance Drift Factor	<0.5% after 2 years at 40°C					
Capacitance Temperature Coefficient	-200 ppm/°C, ±100ppm/°C					
Dielectric Strength	Terminal to Terminal					
	200% of rated VDC or VAC applied for 10 Seconds and 25°C					
Dielectric	Polypropylene					
Construction	Metallized film					
Coating	Flame Retardant epoxy resin (UL94V0)					
Leads	Lead free tinned copper leads					

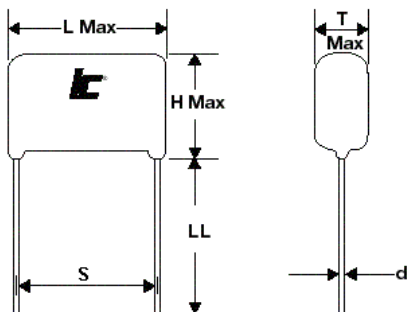

L MAX	12	18.5	26	31
S+1.0	10	15	22.5	27.5
G MAX	1.5	1.5	1.5	1.5
d±0.05	0.6	0.8	0.8	0.8

MPR

Metallized Polypropylene
Epoxy Dipped Radial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.01	400	103MPR400K	350	13x9x5	10	0.6
0.01	630	103MPR630K	420	13x10x6	10	0.6
0.015	250	153MPR250K	220	13x9x5	10	0.6
0.015	400	153MPR400K	350	13x9.5x5	10	0.6
0.015	630	153MPR630K	420	13x11x7	10	0.6
0.022	250	223MPR250K	220	13x9x5	10	0.6
0.022	400	223MPR400K	350	13x10.5x5.5	10	0.6
0.022	630	223MPR630K	420	13x12.5x8.5	10	0.6
0.033	250	333MPR250K	220	13x9x5.5	10	0.6
0.033	400	333MPR400K	350	13x11x6.5	10	0.6
0.033	630	333MPR630K	400	18x11.5x7.5	15	0.8
0.047	250	473MPR250K	220	13x9.5x5.5	10	0.6
0.047	400	473MPR400K	350	13x11x7.5	10	0.6
0.047	630	473MPR630K	400	18x13.5x8.5	15	0.8
0.068	250	683MPR250K	220	13x10.5x6	10	0.6
0.068	400	683MPR400K	300	18x12x6.5	15	0.8
0.068	630	683MPR630K	400	18x15.5x9.5	15	0.8
0.1	250	104MPR250K	220	13x11x7	10	0.6
0.1	400	104MPR400K	300	18x12.5x7.5	15	0.8
0.1	630	104MPR630K	230	26x15x10	22.5	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.15	250	154MPR250K	200	18x11x7	15	0.8
0.15	400	154MPR400K	185	26x13x7.5	22.5	0.8
0.15	630	154MPR630K	230	26x17x11	22.5	0.8
0.22	250	224MPR250K	200	18x12.5x7.5	15	0.8
0.22	400	224MPR400K	165	26x14x8.5	22.5	0.8
0.22	630	224MPR630K	180	31x17.5x10.5	27.5	0.8
0.22	1000	224MPR102K	135	31x18x9	27.5	0.8
0.33	250	334MPR250K	200	18x13x8.5	15	0.8
0.33	400	334MPR400K	165	26x15x10	22.5	0.8
0.33	630	334MPR630K	180	31x21.5x13	27.5	0.8
0.47	100	474MPR100K	100	18.5x14x8	15	0.8
0.47	250	474MPR250K	110	26x14x8.5	22.5	0.8
0.47	400	474MPR400K	150	31x16.5x10.5	27.5	0.8
0.47	630	474MPR630K	180	31x24.5x15.5	27.5	0.8
0.47	1000	474MPR102K	135	31x22x13	27.5	0.8
0.68	250	684MPR250K	115	26x15x9.5	22.5	0.8
1	250	105MPR250K	110	26x16x12	22.5	0.8
1	400	105MPR400K	150	31x22x15	27.5	0.8
1.5	250	155MPR250K	100	31x18x13	27.5	0.8
2.2	250	225MPR250K	100	31x21x15	27.5	0.8