



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



+105°C Long Life, Low Impedance


### FEATURES

Small Size – Long Life – Low Impedance

### APPLICATIONS

Filtering – Bypass/ Coupling – De-Coupling

Operating Temperature Range		-55°C to +105°C					
Capacitance Tolerance		+20% at 120 Hz, 20°C					
Surge Voltage	WVDC	6.3	10	16	25	35	50
	SVDC	7.9	13	20	32	44	63
Dissipation Factor	WVDC	6.3	10	16	25	35	50
	D<6.3mm	.26	.2	.16	.14	.12	.12
	D>8mm	.28	.24	.2	.16	.14	.14
Leakage Current		2 Minutes					
		01CV or 3uA, Whichever is greater					
Low Temperature Stability Impedance Ratio (120 Hz)	Rated WVDC	6.3	10	16	25	35	50
	-25°C to +20°C	3	2	2	2	2	2
	-40°C to +20°C	5	4	4	3	3	3
Load Life		5000 hours(2000 hours for D=4,5,6.3mm) at 105°C with rated WVDC					
		Capacitance Change <=30% of initial measured value					
		Dissipation Factor <=300% of maximum specified value					
		Leakage Current <=100% of maximum specified value					
Shelf Life		1000 hours at 85°C with no voltage applied					
		Capacitance Change <=30% of initial measured value					
		Dissipation Factor <=300% of maximum specified value					
		Leakage Current <=100% of maximum specified value					
Resistance to Soldering Heat		Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminations facing downward will fulfill the following conditions after being cooled to room temperature					
		Capacitance Change <=10% of initial measured value					
		Dissipation Factor <=100% of maximum specified value					
		Leakage Current <=100% of maximum specified value					
Ripple Current Multipliers		Frequency (Hz)					
		50	120	300	1k	100k	
		.35	.5	.64	0.83	1.0	

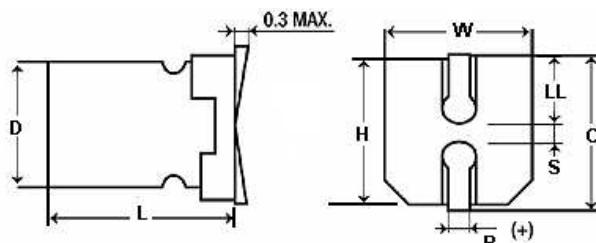

D	L	W±0.2	H±0.2	C±0.2	R	LL±0.2	S±0.2
4	5.4 +0.1/-0.2	4.3	4.3	5.0	0.5~0.8	1.8	1.0
5	5.4 +0.1/-0.2	5.3	5.3	6.0	0.5~0.8	2.1	1.3
6.3	5.4 +0.1/-0.2	6.6	6.6	7.3	0.5~0.8	2.4	2.2
6.3	7.7 +0.1/-0.2	6.6	6.6	7.3	0.5~0.8	2.4	2.2
8	10.2+0.1/-0.2	8.3	8.3	9.0	0.7~1.0	2.9	3.1
10	10.2+0.1/-0.2	10.3	10.3	11.0	0.7~1.0	3.2	4.5

# AVD

+105°C, Low Impedance, up to 5000 hours

Capacitance ( $\mu$ F)	WVDC	IC PART NUMBER	Maximum ESR ( $\Omega$ ) 120 Hz, +20°C	Impedance $\Omega +20^\circ\text{C}$ , 100kHz	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
1	50	<b>105AVD050MCR</b>	232.1	5	30	4x5.4
2.2	50	<b>225AVD050MCR</b>	90.43	5	30	4x5.4
3.3	50	<b>335AVD050MCR</b>	60.29	5	30	4x5.4
4.7	35	<b>475AVD035MCR</b>	42.33	1.8	80	4x5.4
4.7	50	<b>475AVD050MDR</b>	42.33	1.52	85	5x5.4
10	25	<b>106AVD025MCR</b>	23.21	1.8	80	4x5.4
10	35	<b>106AVD035MDR</b>	19.89	0.76	150	5x5.4
10	50	<b>106AVD050MER</b>	19.89	0.88	165	6.3x5.4
22	10	<b>226AVD010MCR</b>	15.07	1.8	80	4x5.4
22	35	<b>226AVD035MDR</b>	9.04	0.76	150	5x5.4
22	50	<b>226AVD050MER</b>	9.04	0.88	165	6.3x5.4
33	10	<b>336AVD010MDR</b>	10.05	0.76	150	5x5.4
33	35	<b>336AVD035MER</b>	6.03	0.44	230	6.3x5.4
33	50	<b>336AVD050MEL</b>	6.03	0.68	185	6.3x7.7
47	6.3	<b>476AVD6R3MDR</b>	9.17	0.76	150	5x5.4
47	25	<b>476AVD025MER</b>	4.94	0.44	230	6.3x5.4

Capacitance ( $\mu$ F)	WVDC	IC PART NUMBER	Maximum ESR ( $\Omega$ ) 120 Hz, +20°C	Impedance $\Omega +20^\circ\text{C}$ , 100kHz	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
47	35	<b>476AVD035MEL</b>	4.23	0.34	280	6.3x7.7
47	50	<b>476AVD050MFE</b>	4.94	0.34	350	8x10.5
100	16	<b>107AVD016MER</b>	2.65	0.44	230	6.3x5.4
100	25	<b>107AVD025MEL</b>	2.32	0.34	280	6.3x7.7
100	35	<b>107AVD035MFE</b>	2.32	0.17	600	8x10.5
100	50	<b>107AVD050MGE</b>	2.32	0.18	670	10x10.5
220	6.3	<b>227AVD6R3MER</b>	1.96	0.44	230	6.3x5.4
220	16	<b>227AVD016MEL</b>	1.36	0.34	280	6.3x7.7
220	25	<b>227AVD025MFE</b>	1.21	0.17	600	8x10.5
220	35	<b>227AVD035MGE</b>	1.06	0.09	850	10x10.5
330	6.3	<b>337AVD6R3MFE</b>	1.41	0.34	280	6.3x7.7
330	16	<b>337AVD016MFE</b>	1	0.17	600	8x10.5
330	25	<b>337AVD025MGE</b>	0.8	0.09	850	10x10.5
470	10	<b>477AVD010MFE</b>	0.85	0.17	600	8x10.5
470	16	<b>477AVD016MGE</b>	0.71	0.09	850	10x10.5
1000	10	<b>108AVD010MGE</b>	0.4	0.09	850	10x10.5



Your Global Source for World-Class Capacitors  
© 2016 Illinois Capacitor

North America  
 Tel: 847.675.1760  
 sales@illcap.com

Asia  
 Tel: 852.2793 0931  
 sales@illcap.com.hk