



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SKBI 32/F/ZD

Order No.: 2261106

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261106>Plug-in card block, Nominal current: 4 A, Number of positions: 32,
Pitch: 0 mm, Color: green**Commercial data**

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 053840 |
| sales group | E211 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 523 (CC-2009) |

Product notesWEEE/RoHS-compliant since:
05/22/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Dimensions / positions**

| | |
|---------------------|--------|
| Length | 43 mm |
| Height | 138 mm |
| Width | 112 mm |
| Pitch | 0 mm |
| Number of positions | 32 |

| | |
|------------------------|--------|
| Hole diameter | 4.2 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Technical data

| | |
|----------------------------------|--|
| Range of articles | SKBI 32 |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 4 A |
| Nominal voltage U_N | 250 V (in acc. with DIN VDE 0110/Gr.B) |
| Stripping length | 8 mm |

Connection data

| | |
|--|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |

Certificates / Approvals




Certification GOST

Accessories


| Item | Designation | Description |
|-----------------|---------------|---|
| Assembly | | |
| 2261009 | SF-SKBI 31/32 | Snap foot, for horizontal or vertical mounting of the SKBI plug-in card blocks, on the NS 35/7.5 DIN rail |

Diagrams/Drawings

Dimensioned drawing

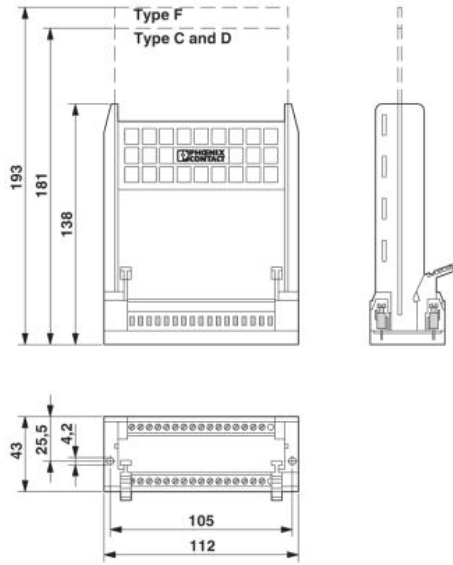

Schematic diagram

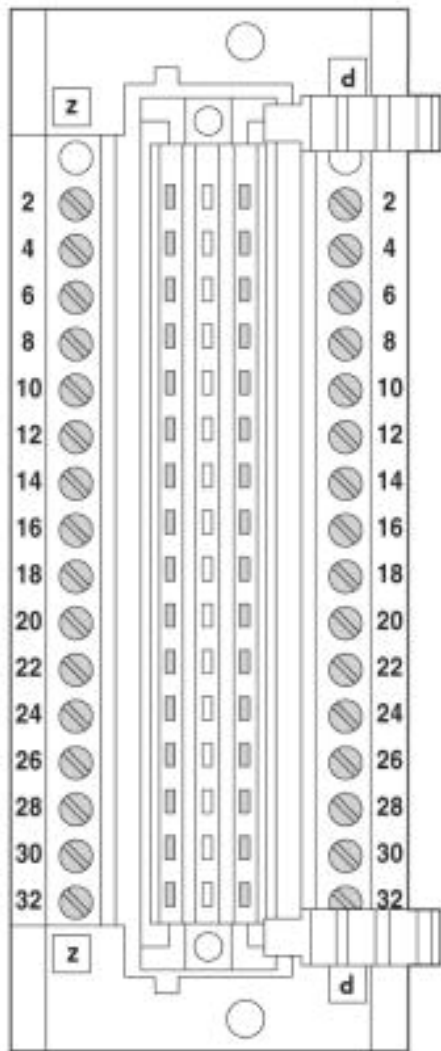

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;