



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**3M**

**Dynatel™**

Advanced Cable/Fault Locator 2273



Quickly and Accurately Identify Underground Assets



The 3M™ Dynatel™ Advanced Cable/Fault Locator 2273 is a microprocessor-based system that incorporates advanced digital signal processing techniques to quickly and efficiently locate sheath (earth return) faults and trace the path of underground cables, both copper and fiber optic (with metallic trace wire). Lightweight, compact and well-balanced, the 2273 accurately:

- Locates cable path
- Measures cable or sonde depth with the push of a button
- Measures signal current in the cable
- Pinpoints sheath faults and cable breaks
- Discriminates between light and heavy faults
- Identifies cable using toning function
- Tones shorts and grounds in aerial cable
- Locates energized power cable

The 2273 provides accurate cable or sonde depth measurements, giving a digital readout in inches, feet and inches, or centimeters (user-selectable).

Additionally, when used in conjunction with the 3M™ Dynatel™ Marker Locating Accessory, 2205/2206 EMS the system can:

- Pinpoint the exact location of buried EMS markers
- Trace a cable path while simultaneously finding buried markers along the way

#### **FOUR MODES OF OPERATION FOR ACCURATE LOCATES, EVEN IN CONGESTED AREAS**

For cable path locating, the 2273 advanced cable/fault locator receiver uses one of four user-selected locating modes – dual peak, dual null, differential or special peak (which increases the sensitivity of the receiver for tracing over longer distances). The mode is selected depending on which is most effective under the locating conditions.



The 3M™ Dynatel™ Advanced Cable/Fault Locator 2273 can be used with the 3M™ Dynatel Marker Locating Accessory 2205/2206 EMS.

The 3M™ Dynatel™ receiver includes four volume settings, including a special “expander” function that makes peaks and nulls more pronounced. The expander feature enhances the amplitude difference between two conductors carrying the same signal, making the unit extremely accurate, even in congested areas. A headphone jack is also included.

### **PRECISELY LOCATES FAULTS**

The 2273 cable/fault locator can precisely locate sheath (earth return) faults on both short and long cable sections. The unit sends a trace signal simultaneously with a fault-locate signal, allowing the operator to use the cable-locate function when locating sheath faults in long cable sections. Sheath (earth return) fault strength is indicated on the receiver LCD display, allowing minor faults to be ignored, if desired.

### **A SIMPLE, EASY-TO-USE SYSTEM**

The Dynatel 2273 advanced cable/fault locator is easy to operate and requires very little training. Digital liquid crystal display (LCD) readout and push-button operation make the unit easy to understand, for more precise locates. A “memory” feature remembers operator set-up from previous use. The system consists of three basic components:

- Transmitter with built-in ohmmeter, which also senses and measures the presence of foreign voltage, and tests the continuity of the circuit.
- One-piece hand-held receiver with bar graph that indicates received signal and proximity to the cable.
- Earth contact frame that is color-coded to correspond with indications from the receiver directing the operator toward the fault.

The 2273 cable/fault locator uses four active trace frequencies – 577 Hz, 8 kHz, 33 kHz and 200 kHz – which can be used individually or simultaneously to compensate for varying field conditions. The receiver incorporates passive power and auxiliary frequencies that do not require the use of the transmitter.

Both the receiver and the transmitter feature a self-test routine which is

executed each time the unit is turned on. A power-up battery test indicates the battery level. Both components are constructed of heavy-duty materials designed to withstand typical field use.

## 3M™ DYNATEL™ ADVANCED CABLE/FAULT LOCATOR 2273

### FEATURES

### BENEFITS

#### TRANSMITTER

Four operator-selectable frequencies	Optimizes unit performance in varying conditions
Simultaneous signals	Enables receiver to verify cable location
Fault-locate/cable-locate signals applied simultaneously	Enables receiver to verify cable location while fault locating
Built-in ohmmeter with voltage sensing/measuring capability	Displays earth fault resistance; confirms far-end grounds and shield continuity
Three signal application methods (direct connect, coupler, induction)	Flexibility under varying plant conditions
Auto load (impedance) matching	Automatic adjustment of output voltage to maximize signal
High and normal output level	High output level for extreme distance locates and other varying cable conditions
Displays output signal current in trace mode	Assists in proper frequency selection and setup
Audible indication of hazardous voltage in ohms mode	Warns operator of potentially dangerous situation
Can connect to energized power cables up to 240 Vac	Prevents inadvertent damage to unit; operates while attached to live circuits
External DC operation (Option 'A' only)	5-watt output capability and saves batteries

#### RECEIVER

Peak and null modes	Verify cable location
Differential mode	Indicates direction to cable
Push-button digital depth readout (of cable or sonde) in inches, feet and inches, or centimeters	Easy, quick and accurate depth measurements; no conversion table required for sonde depth measurements
Measures signal current in cable	Helps identify target cable regardless of depth
Visual and audible cable locates	Ensure accuracy under varying field conditions
Digital fault strength indicator	Operator can differentiate between light and severe faults
Coupler jack	Pair/cable identification
Graphic display	Operator can distinguish between target cable and other cables in congested areas
Expander function	Improves sensitivity of audible and visual response
Three passive 50/60 Hz power frequency settings	Optimized for primary, secondary, or rectified power
31.5 kHz Auxiliary frequency	For locating CATV cables <sup>1</sup>
512 Hz, 560 Hz Auxiliary frequencies (some models)	Detects frequencies from central office installed transmitters
Compatible with 2205/2206 marker locating accessory	Allows unit to pinpoint location of buried EMS markers

Note 1. American NTSC, television set on

## 3M™ DYNATEL™ STANDARD ACCESSORIES

MODEL	DESCRIPTION
9012	Direct-Connect Transmitter Cable; for direct connection to cable and ground; 5' (1.5 m) long
8006	Ground Rod; stainless steel
3014	Earth Contact Frame
9026	Earth Contact Frame Cable; 4 ft. (1.2 m) long
	40 ft. (12 m) long Cigarette Lighter Adapter Cable (Option'A' Only)

## 3M™ DYNATEL™ OPTIONAL ACCESSORIES

MODEL	DESCRIPTION
3019	Dyna-Coupler Kit; consists of 3" Dyna-Coupler for use on cables up to 3" (7.6 cm), Coupler Extension Cable, and Pouch
1196	6" Dyna-Coupler; for use on cables up to 6.9" (17.5 cm) in diameter
9043	Ground Extension Cable
9011	Coupler Extension Cable
3229	Active Duct Probe, 33 kHz
2205/2206	EMS Marker Locating Accessory
2200	Series Carrying Bag
2892	Small Clip Direct-Connect Transmitter Cable, for direct connection to cable and ground; 10' (3 m) long
2876	Direct-Connect Transmitter Cable, 10' (3 m) in length, for utility (U) models
2200RB	Rechargeable Auxiliary Battery for 5-watt units

## PHYSICAL SPECIFICATIONS

Size		
Transmitter		6.75" H x 11.25" W x 7.75" D (17.2 cm x 28.6 cm x 19.7 cm)
Receiver		25.5" H x 3.75" W x 10.75" D (64.8 cm x 9.5 cm x 27.3 cm)
Weight (including batteries)		
Transmitter		5.3 lbs. (2.4 kg)
Receiver		4.1 lbs. (1.9 kg)
Shipping		21.5 lbs. (9.8 kg)

## ENVIRONMENTAL SPECIFICATIONS


Operating temperature	-4° to 122°F (-20° to 50°C)
Storage temperature	-40° to 158°F (-40° to 70°C)

## ORDERING INFORMATION

TO ORDER, SPECIFY THE APPROPRIATE 3M™ DYNATEL™ 2273 ADVANCED CABLE LOCATOR USING THE TABLE BELOW.

<b>Generic product number: 2273-XYZ</b>		
<b>Market</b>		<b>Code X</b>
USA/Canada		U3 (3-watt transmitter)
USA/Canada (Option 'A')		U5 (5-watt transmitter)
<b>Typical Use</b>	<b>Direct connect cable configuration</b>	<b>Code Y</b>
Telephone/CATV	5-foot cable with telco-style direct connection clips	T
Power	10-foot cable with large alligator direct connection clips	P
<b>Coupler Kit</b>		<b>Code Z</b>
No coupler kit		N
3" coupler kit		3

### Example 2273-XYZ

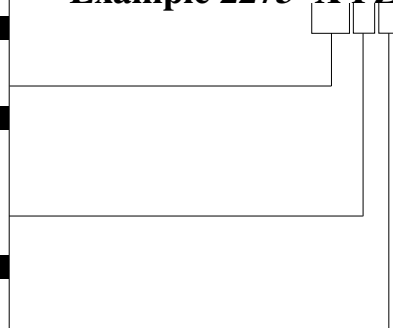

Example: 2273-U5PN translates to a 2273 Cable Locator with 5-watt transmitter for the USA/Canada market, used by a power utility and no coupler kit

## 3M™ DYNATEL™ ADVANCED CABLE/FAULT LOCATOR 2273 ELECTRICAL SPECIFICATIONS

RECEIVER	
Frequencies	
Trace and tone modes	Active: 577 Hz, 8 kHz, 33 kHz, 200 kHz Passive Power: 50/60 Hz user selectable: L50/L60 – 5th harmonic, H50/H60 – 9th harmonic, 100/120 – rectified power Auxiliary: 'T' model: 31.5 kHz, 512 Hz, 560 Hz 'P' model: 31.5 kHz
Depth	Range: 0 to 30' (0 to 9 m) Accuracy: ±10% ±1 digit for 0 to 60" (0 to 1.5 m) ±15% for 60" to 180" (1.5 to 4.5 m) ±20% for 180" to 360" (4.5 to 9 m)
Power	Six alkaline "AA" (LR6) cells
Typical battery life	50 hours
TRANSMITTER	
Output frequencies	
Trace mode	577 Hz, 8 kHz, 33 kHz, 200 kHz
Sheath fault mode	10/20 Hz for sheath fault; 577 Hz and 33 kHz for tracing
Tone mode	577 Hz and 200 kHz pulsed at 8 Hz
Induction mode	33 kHz, 200 kHz
Output voltage (maximum)	
Sheath fault	70 Vrms
Trace	70 Vrms
Tone	Normal setting: 10 Vrms, High setting: 60 Vrms
Output power	Normal setting: Limited to 0.5 W High setting: Limited to 3 W, or 5 W with External DC power (option 'A' only)
Output protection	240 Vrms
Power	Batteries: Six alkaline "C" (LR14) cells; External DC: 9-18V DC (1A) (option 'A' only)



To order, call 800/426 8688. For more information, please contact your local 3M representative.

3M and Dynatel are trademarks of 3M Company.

### **Important Notice**

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

#### **Warranty; Limited Remedy; Limited Liability.**

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



#### **Track and Trace Solutions**

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
[www.3M.com/dynatel](http://www.3M.com/dynatel)

Please recycle. Printed in USA.  
© 3M 2007. All rights reserved.  
80-6113-1545-0