



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## DFLK 20

Order No.: 2280242

The illustration shows a 50-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2280242>

VARIOFACE panel feed-through module, for direct coupling of single signal lines of up to 2.5 mm<sup>2</sup> to flat-ribbon cable plug connector, 20-pos.

Commercial data	
GTIN (EAN)	 4 017918 054359
sales group	I001
Pack	5 pcs.
Customs tariff	85369010
Catalog page information	Page 283 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
08/16/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Nominal voltage $U_N$	< 50 V AC 60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	20

Width	39 mm
Height	68.4 mm
Depth	49 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 45 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	Flat-ribbon cable connector in acc. with IEC 60603-13
Type of connection	Pluggable
Number of positions	20

**Certificates / Approvals**

Certification




GOST

**Accessories**

Item	Designation	Description
<b>Cable/conductor</b>		
2296391	FLK 20/EZ-DR/ 50KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 0.5 m
2296401	FLK 20/EZ-DR/ 100KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 1.0 m
2296472	FLK 20/EZ-DR/ 150KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 1.5 m
2296485	FLK 20/EZ-DR/ 200KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 2.0 m
2296498	FLK 20/EZ-DR/ 300KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 3.0 m
2296508	FLK 20/EZ-DR/ 400KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 4.0 m
2296511	FLK 20/EZ-DR/ 600KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 6.0 m
2296524	FLK 20/EZ-DR/ 800KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 8.0 m
2296537	FLK 20/EZ-DR/1000KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 10.0 m
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

Diagrams/Drawings

Dimensioned drawing

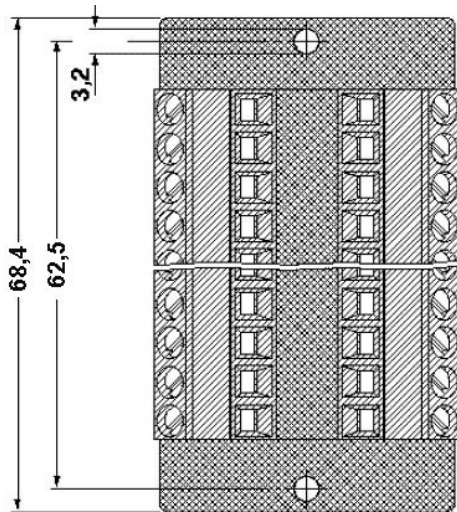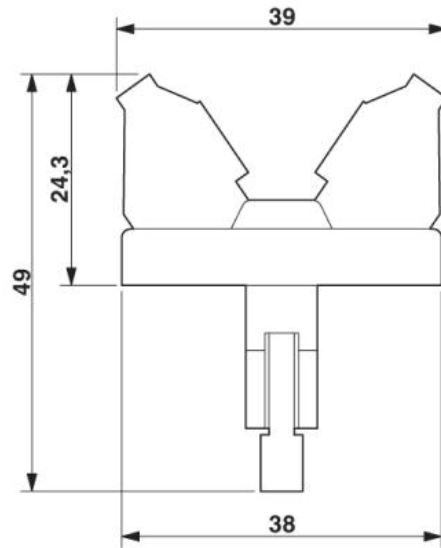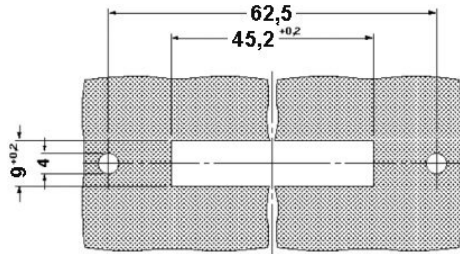

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;