



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# FLKMS 14/ 8IM/LA/PLC


Order No.: 2284536

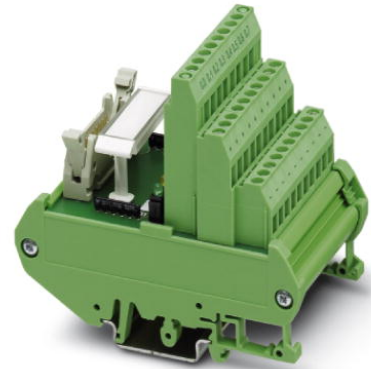

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2284536>

VARIOFACE sensor module, for connecting 8 p-n-p sensors, with LED



| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 055707 |
| sales group              | I630   |
| Pack                     | 5 pcs.   |
| Customs tariff           | 85369010   |
| Catalog page information | Page 204 (IF-2007)   |

#### Product notes

WEEE/RoHS-compliant since:  
05/04/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General data                              |                      |
|---|----------------------|
| Nominal voltage $U_N$                     | 20 V (up to 30 V DC) |
| Max. current carrying capacity per branch | 1 A                  |
| Max. total current of voltage supply      | 3 A                  |
| Number of positions                       | 14                   |

|   |                       |
|---|-----------------------|
| Width                                   | 57 mm                 |
| Height                                  | 90 mm                 |
| Depth                                   | 81 mm                 |
| Status display                          | LED                   |
| Ambient temperature (operation)         | -20 °C ... 50 °C      |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C      |
| Test voltage                            | 500 V (50 Hz, 1 min.) |
| Mounting position                       | Any                   |
| Standards/regulations                   | IEC 60664             |
|   | DIN EN 50178          |
|   | IEC 62103             |
| Pollution degree                        | 2                     |
| Surge voltage category                  | II                    |

#### Connection data

|  |  |
|--|--|
| Connection 1                           | Field level  |
| Connection in acc. with standard       | IEC / EN   |
| Type of connection                     | Screw connection   |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>  |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min. | 24   |
| Conductor cross section AWG/kcmil max  | 12   |
| Stripping length                       | 8 mm   |
| Screw thread                           | M3   |
| Connection 2                           | Control system level                                       |
| Number of connections                  | 1  |
| Type of connection                     | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of positions                    | 14   |

#### Certificates / Approvals




Certification

CUL, GOST, UL

---

## Diagrams/Drawings

### Circuit diagram

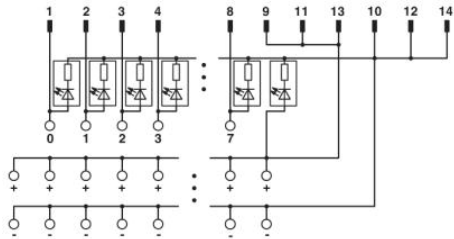

FLKMS 14/8IM/LA/PLC connection scheme

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;