



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SFL (2,8-0,8)F48

Order No.: 2285315
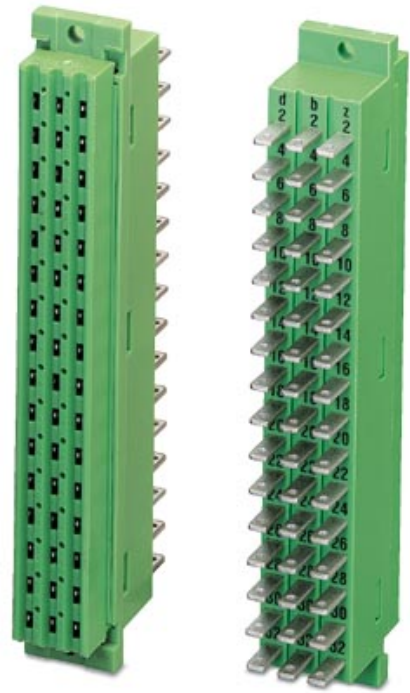
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285315>Flat connector socket, Number of positions: 48, Pitch: 0 mm, Color:
green**Commercial data**

| | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 055912 |
| sales group | E310 |
| Pack | 10 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 279 (CC-2002) |

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|---------------------|---------|
| Length | 14.8 mm |
| Height | 28.6 mm |
| Width | 95 mm |
| Pitch | 0 mm |
| Number of positions | 48 |
| Hole diameter | 2.8 mm |

Technical data

| | |
|------------------------------------|---------------|
| Range of articles | SFL (2,8-0,8) |
| Insulating material group | II |
| Rated surge voltage (III/3) | 2.5 kV |
| Insulating material | PA-F |
| Inflammability class acc. to UL 94 | HB |

Certificates / Approvals



Certification GOST

Accessories


| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

Cable/conductor

| | | |
|---------|-----------|--|
| 1406700 | PT/FS 2,8 | Plastic sheath, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves |
|---------|-----------|--|

Diagrams/Drawings

Dimensioned drawing

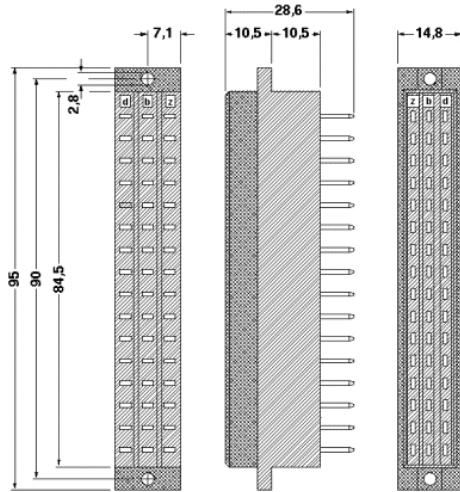

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;