



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# FLKM 14-PA-SLC500/IN

Order No.: 2293462

The illustration shows version FLKM 14-PA-SLC500/OUT



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293462>

VARIOFACE front adapter, 2 x 8 channels can be connected, for Allen-Bradley SLC 500, 1746 IA16, IB16, ITB16 and IN16

Commercial data	
EAN	4017918108861
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.0574 KG
Catalog page information	Page 192 (IF-2009)

#### Product notes

WEEE/RoHS-compliant since:  
06/04/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General	
Nominal voltage $U_N$	< 50 V AC
	60 V DC
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	2

No. of positions, plug connector	14
Number of positions	14
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
Max. permissible total current	2 A (Per Byte, for supply via connector)
Pollution degree	1
Surge voltage category	II
Supported controller	ALLEN-BRADLEY SLC 500
Supported I/O card	1746 IA16
	1746 IB16
	1746 ITB16
	1746 IN16

**Certificates / Approvals**




Certification

CUL, GOST, UL

**Diagrams/Drawings**

Circuit diagram

Connection scheme FLKM 14-PA-SLC500/IN

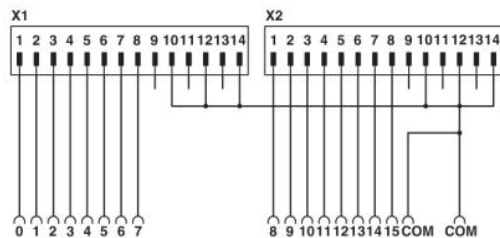

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;