



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UM 45-FLK14/ZFKDS

Order No.: 2293527


The illustration shows a 20-position version

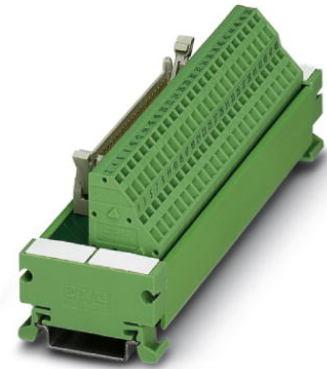

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293527>

VARIOFACE module, with spring-cage connection and flat-ribbon cable plug connector, for mounting on NS 35/7.5, 14-pos.



Commercial data	
GTIN (EAN)	 4 017918 120429
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 281 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
09/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	< 50 V AC 60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	14

Width	59 mm
Height	45 mm
Depth	50 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664 DIN EN 50178 IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Connection 2	Flat-ribbon cable connection
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

Certificates / Approvals

Certification CUL, GOST, UL

Accessories		
Item	Designation	Description
Cable/conductor		
2295729	FLK 14/EZ-DR/ 30/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.3 m
2288901	FLK 14/EZ-DR/ 50/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.5 m
2296977	FLK 14/EZ-DR/ 50/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 0.5 m
2288914	FLK 14/EZ-DR/ 100/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1 m
2296980	FLK 14/EZ-DR/ 100/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1 m
2288927	FLK 14/EZ-DR/ 150/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1.5 m
2296993	FLK 14/EZ-DR/ 150/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1.5 m
2288930	FLK 14/EZ-DR/ 200/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2 m
2297002	FLK 14/EZ-DR/ 200/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 2 m
2288943	FLK 14/EZ-DR/ 250/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2.5 m
2288956	FLK 14/EZ-DR/ 300/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3 m
2299013	FLK 14/EZ-DR/ 300/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 3 m
2288969	FLK 14/EZ-DR/ 350/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3.5 m
2288972	FLK 14/EZ-DR/ 400/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4 m
2299026	FLK 14/EZ-DR/ 400/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 4 m
2290847	FLK 14/EZ-DR/ 450/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4,5 m
2290834	FLK 14/EZ-DR/ 500/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5 m


2290850	FLK 14/EZ-DR/ 550/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5,5 m
2290863	FLK 14/EZ-DR/ 600/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 6 m
2299039	FLK 14/EZ-DR/ 600/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 6 m
2299563	FLK 14/EZ-DR/ 800/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 8 m
2299042	FLK 14/EZ-DR/ 800/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 8 m
2299576	FLK 14/EZ-DR/1000/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 10 m
2299055	FLK 14/EZ-DR/1000/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

Tools

1204504	SZF 0-0,4X2,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip
---------	---------------	--

Diagrams/Drawings

Circuit diagram

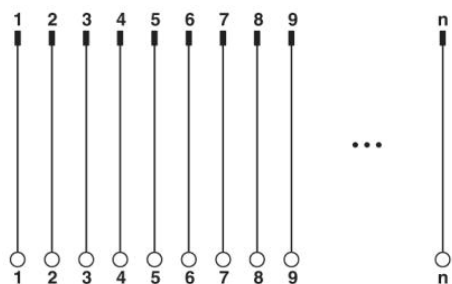

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;