



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UM 45-FLK20/ZFKDS

Order No.: 2293543

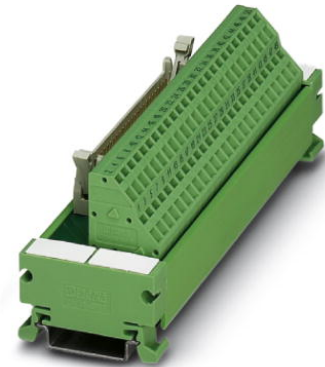


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293543>

VARIOFACE module, with spring-cage connection and flat-ribbon cable plug connector, for mounting on NS 35/7.5, 20-pos.



Commercial data

GTIN (EAN)	 4 017918 120443
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 281 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
07/14/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	< 50 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	20

Width	75 mm
Height	45 mm
Depth	50 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664 DIN EN 50178 IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Connection 2	Flat-ribbon cable connection
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	20


Certificates / Approvals

Certification CUL, GOST, UL

Accessories		
Item	Designation	Description
Cable/conductor		
2296391	FLK 20/EZ-DR/ 50KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 0.5 m
2296401	FLK 20/EZ-DR/ 100KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 1.0 m
2296472	FLK 20/EZ-DR/ 150KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 1.5 m
2296485	FLK 20/EZ-DR/ 200KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 2.0 m
2296498	FLK 20/EZ-DR/ 300KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 3.0 m
2296508	FLK 20/EZ-DR/ 400KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 4.0 m
2296511	FLK 20/EZ-DR/ 600KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 6.0 m
2296524	FLK 20/EZ-DR/ 800KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 8.0 m
2296537	FLK 20/EZ-DR/1000KONFEK	Round cable set, with 20-position socket strips, 1:1 connection, can be used, for example, for MODICON TSX Micro, Premium, Quantum, no. of positions: 20, cable length 10.0 m
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length
Tools		
1204504	SZF 0-0,4X2,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

Diagrams/Drawings

Circuit diagram

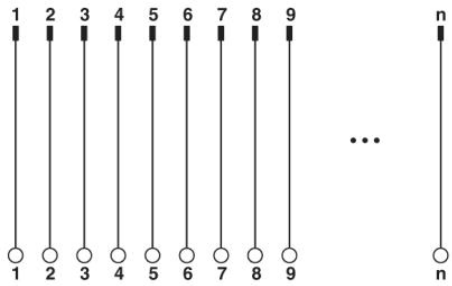

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;