



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



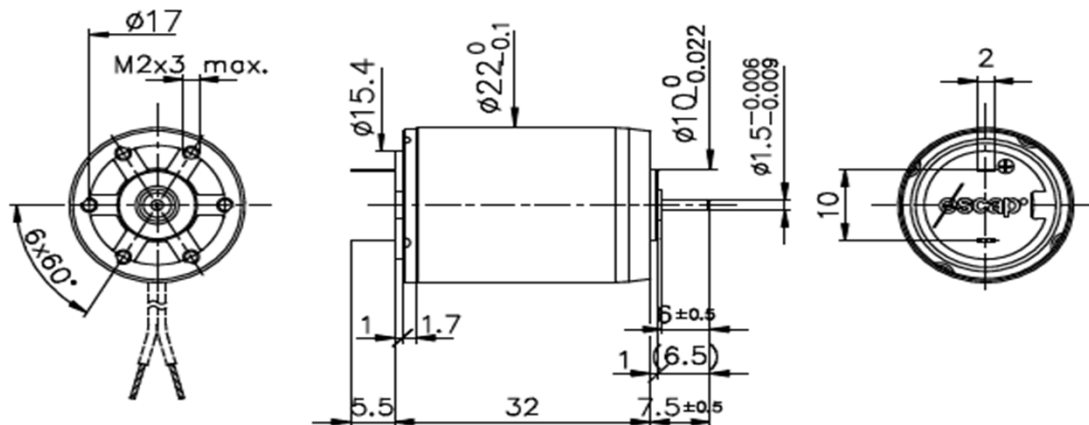

22N28 ** .286**

Electrical Data	****	216P	216E	213E	210E	208E	105	
1 Nominal Voltage	V	3	6	9	12	18	18	Volt
2 No-Load Speed	n_0	5,275	5,580	7,000	5,880	6,300	3,580	rpm
3 No-Load Current	I_0	12.6	7.0	6.0	4.5	3.5	1.4	mA
4 Terminal Resistance	R	1.5	5.8	10.3	27.0	59.0	200.0	Ω
5 Output Power	$P_{2max.}$	4.3	4.2	3.8	3.7	3.5	3.3	W
6 Stall Torque	mNm	10.9 (1.55)	10.5 (1.49)	10.7 (1.52)	8.6 (1.22)	8.2 (1.17)	4.3 (0.61)	mNm (oz-in)
7 Efficiency	$\eta_{max.}$	85	84	84	81	80	77	%
8 Max continuous speed	$n_{e max.}$	10,000	10,000	10,000	10,000	10,000	10,000	rpm
9 Max continuous torque	$M_{e max.}$	8.8 (1.19)	8.4 (1.19)	7.5 (1.07)	7.3 (1.04)	6.9 (0.98)	6.5 (0.93)	mNm (oz-in)
10 Max continuous current	$I_{e max.}$	1.63	0.83	0.62	0.38	0.26	0.14	A
11 Back-EMF Constant	k_E	0.57	1.07	1.28	2.02	2.83	4.95	mV/rpm
12 Torque Constant	k_M	5.40	10.20	12.20	19.30	27.00	47.30	mNm/A
13 Motor Regulation	R/k^2	51.4	55.7	69.2	72.49	80.93	89.39	$10^3/Nms$
14 Friction Torque	T_F	0.07 (0.01)	0.07 (0.01)	0.07 (0.01)	0.07 (0.01)	0.07 (0.01)	0.07 (0.01)	mNm (oz-in)
15 Rotor Inductance	L	0.10	0.35	0.50	1.20	2.30	7.00	mH
16 Mechanical Time Constant	τ_m	18.0	19.5	19.4	21.7	23.5	17.9	ms
17 Rotor Inertia	J	3.50	3.50	2.80	3.00	2.90	2.00	$g.cm^2$
18 Thermal Resistance (rotor/body)	R_{th1} / R_{th2}	5/20	5/20	5/20	5/20	5/20	5/20	$^{\circ}C/W$
19 Thermal Time Constant (rotor/stator)	τ_{w1}/τ_{w2}	5/550	5/550	5/550	5/550	5/550	5/550	$^{\circ}C/W$
20 Operating Temperature Range:	motor	-30°C to 85°C (-22°F to 185°F)						$^{\circ}C (^{\circ}F)$
	rotor							100°C (212°F)
21 Shaft Load max.:		With sleeve bearings						
(5mm from bearing)	-radial							3.0 (10.8)
	-axial	150 (539.5)						N (oz)
22 Shaft play:	-radial	<0.03 (0.0012)						mm (inch)
	-axial	0.15 (0.0059)						mm (inch)
23 Weight	g	53 (1.87)						g (oz)

		Execution			
Gearbox	Single Shaft	F16	E9	MR2	
	22N28	22N28	22N48	22N48	
R22	286	286	309	Contact Us	
M22	286	286	308	483	
K24	286	286	308	Contact Us	
K27	286	286	308	Contact Us	

