



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




22N78 Athlonix™

Precious metal commutation

Ø22mm

15.7 mNm

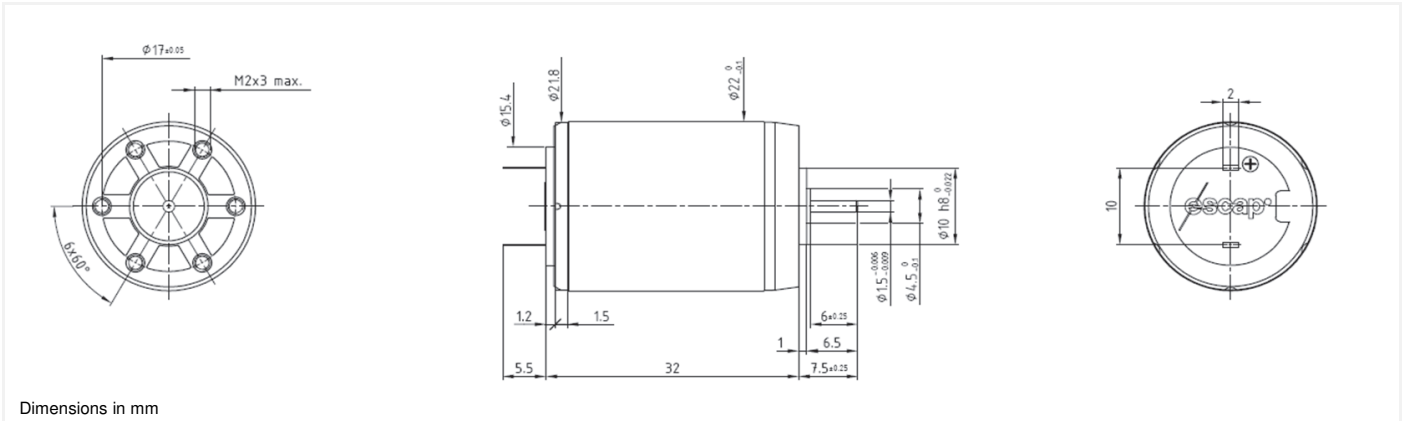


Dimensions in mm

22N78 **** .1001

Electrical Data	****	319P	313P	311P	216E	215E	208E	
1 Nominal Voltage	V	6	9	12	18	24	48	Volt
2 No-Load Speed	n_0	8,660	6,860	7,280	8,250	9,075	6,350	rpm
3 No-Load Current	I_0	28.0	10.0	11.0	6.0	5.0	0.0	mA
4 Terminal Resistance	R	0.6	2.5	3.9	7.7	11.0	107.0	Ω
5 Output Power	P_{2max}	13.0	12.0	12.0	11.3	11.5	10.0	W
6 Stall Torque	mNm	66 (9.35)	45 (6.38)	48 (6.8)	49 (6.94)	55 (7.79)	32 (4.54)	mNm (oz-in)
7 Efficiency	η_{max}	90	90	88	90	91	91	%
8 Max Continuous Speed	$n_{e max}$	10,000	10,000	10,000	10,000	10,000	10,000	rpm
9 Max Continuous Torque	$M_{e max}$	15.7 (2.06)	14.5 (2.06)	14.8 (2.1)	13.8 (1.96)	14.5 (2.06)	12.9 (1.83)	mNm (oz-in)
10 Max Continuous Current	$I_{e max}$	2.40	1.18	0.95	0.67	0.58	0.18	A
11 Back-EMF Constant	k_E	0.69	1.31	1.64	2.18	2.64	7.54	mV/rpm
12 Torque Constant	k_M	6.60	12.50	15.70	20.80	25.20	72.00	mNm/A
13 Motor Regulation	R/k^2	13.8	16.0	15.8	17.80	17.32	20.64	$10^3/Nms$
14 Friction Torque	T_F	0.07 (0.01)	0.25 (0.04)	0.11 (0.02)	0.12 (0.02)	0.12 (0.02)	0.07 (0.01)	mNm (oz-in)
15 Rotor Inductance	L	0.04	0.16	0.25	0.50	0.60	7.00	mH
16 Mechanical Time Constant	t_m	6.7	7.0	6.6	8.4	7.8	6.9	ms
17 Rotor Inertia	J	4.90	4.39	4.20	4.74	4.50	3.32	$g \cdot cm^2$
General Data								
18 Thermal Resistance (rotor/body)	R_{th1} / R_{th2}				6/22			$^\circ C/W$
19 Thermal Time Constant (rotor/stator)	t_{w1}/t_{w2}				9/550			S
20 Operating Temperature Range:	motor				-30 $^\circ C$ to 85 $^\circ C$ (-22 $^\circ F$ to 185 $^\circ F$)			$^\circ C$ ($^\circ F$)
	rotor				100 $^\circ C$ (212 $^\circ F$)			$^\circ C$ ($^\circ F$)
21 Shaft Load Max.:				With sleeve bearings				
(5mm from bearing)	-radial				3.0 (10.8)			N (oz)
	-axial				150 (539.5)			N (oz)
22 Shaft Play:	-radial				<0.03 (0.0012)			mm (inch)
	-axial				0.15 (0.0059)			mm (inch)
23 Weight	g				53 (1.87)			g (oz)

Execution Table			
Gearbox	Single Shaft	MR2	E9
R22	1001	1008	1005
M22	1001	1008	1005
K24	1001	1008	1005
K27	1001	1008	1005

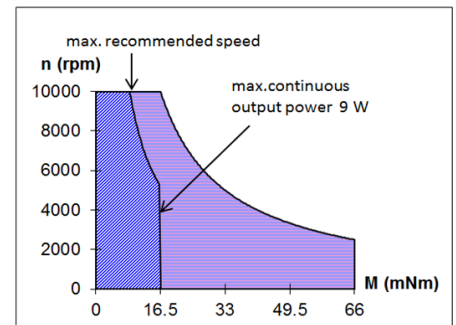

— Continuous working range
— Temporary working range

V121616