



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# FLKM 50-PA-AB/1756/EXTC

Order No.: 2302735



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2302735>

VARIOFACE front adapters, for Allen Bradley ControlLogix and Honeywell PlantScape, max. 1 x 32 channels can be connected. The front adapters are pushed into the high 1756-TBE hoods (not supplied as standard).

Commercial data	
GTIN (EAN)	 4 017918 910488
sales group	I603
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 190 (IF-2009)

#### Product notes

WEEE/RoHS-compliant since:  
01/19/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General</b>	
Nominal voltage $U_N$	< 50 V AC
	60 V DC
Channels which can be connected	32

Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	50
Number of positions	50
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
	8 A (per connection, supply via separate power supply)
Pollution degree	2
Surge voltage category	II
Supported controller	ALLEN-BRADLEY ControlLogix
Supported I/O card	1756-IA16I
	1756-IB16D
	1756-IB16I
	1756-IH16I
	1756-OB32
	1756-IF8
	1756-IF16
	1756-HSC
	1756-M02AE
Supported controller	HONEYWELL PlantScape
Supported I/O card	TC-IDJ 161
	TC-IDX 161
	TC-IDK 161
	TC-ODD 321
	TC-IAH 161

#### Certificates / Approvals




Certification

CUL, UL

---

## Diagrams/Drawings

### Circuit diagram

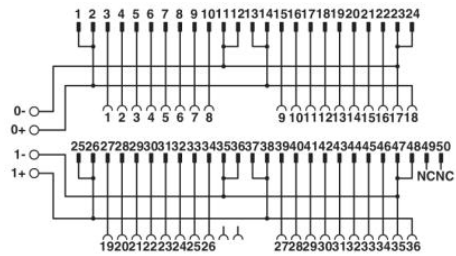

Connection scheme: FLKM 50-PA-AB/1756/EXTC

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;