



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Passive module - FLKMS-KS40/AI/YCS - 2314286

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



16-channel analog module with screw connection. The voltage supply and the 40-pos. system connection are designed redundantly. Suitable for the Yokogawa AAI141 and AAI143 cards.

Product Features

- ✓ For AAI 141 and AAI 143 analog modules (module operation in 4-wire mode)
- ✓ Transfer of 16 channels with separate positive and negative connections
- ✓ Redundant voltage supply (IEC 127-2, 5 x 20, 2 A fuse)



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	653.7 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Width	214 mm
Height	126 mm
Depth	81 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	24 V DC $\pm 10\%$
Max. current carrying capacity per branch	100 mA
Max. total current of all branches	2 A (P1+, P2+)
Number of positions	40

Passive module - FLKMS-KS40/AI/YCS - 2314286

Technical data

General

Test voltage	500 V (50 Hz, 1 min.)
Mounting position	any
Assembly instructions	In rows with zero spacing
Standards/regulations	DIN EN 50178
Standards/specifications	DIN EN 50178
Pollution degree	2
Surge voltage category	III

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Connection data for connection 2

Connection name	Control system level
Number of connections	2
Connection method	Yokogawa KS-compatible
Number of positions	40

Supported controller

Controller	YOKOGAWA CENTUM CS3000R3
- suitable I/O card	AAI141
	AAI143
Controller	YOKOGAWA STARDOM
- suitable I/O card	NFAI143
	NFAI143

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313

Passive module - FLKMS-KS40/AI/YCS - 2314286

Classifications

eCl@ss

eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437


UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Passive module - FLKMS-KS40/AI/YCS - 2314286

Dimensioned drawing

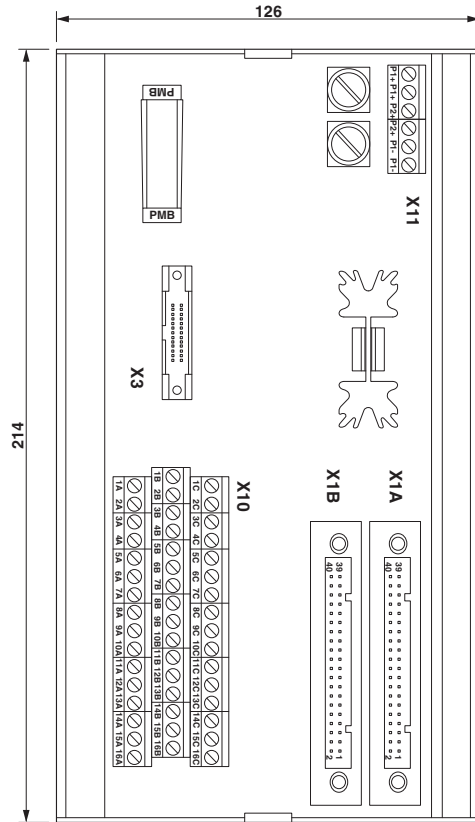

Passive module - FLKMS-KS40/AI/YCS - 2314286

Circuit diagram

