



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# VIP-2/SC/PDM-2/...

## VARIOFACE Professional for power distribution



### INTERFACE

Data Sheet  
2522\_en\_C

© PHOENIX CONTACT - 05/2009

#### 1 Description

Incorporating a contemporary industrial design, VARIOFACE Professional (VIP) offers a next-generation approach to power distribution.

The VIP-2/SC/PDM-2/16, VIP-2/SC/PDM-2/24, and VIP-2/SC/PDM-2/32 modules allow power distribution for two potentials, even in the smallest distributor box. The potentials are supplied with screw-connection terminal blocks capable of accommodating supply wires up to 10 AWG (4 mm<sup>2</sup>) and output wires up to 12 AWG (2.5 mm<sup>2</sup>). Terminals provide labeling for P1 and P2 or + and –.

To aid in device identification in the switch cabinet or distributor box, VARIOFACE Professional integrates a channel that can utilize the full range of ZB holders to provide flexible module marking options. VARIOFACE Professional also offers easy access to output wiring by providing marking on the screw connection surface. The module's single, rugged metal mounting foot moves along the length of the module, facilitating ease of installation and disconnection, and the added benefit of positioning the module for efficient wiring.

#### 2 Features

- Compact design reduces space requirements in the control cabinet or distributor box
- Output marking clearly identified when device is mounted
- Integrated ZB channel allows flexible marking of device
- A single, metal mounting foot allows easy installation and removal to the mounting rail
- Movable mounting foot allows flexible module positioning during wire installation



Make sure you always use the latest documentation.  
It can be downloaded at [www.phoenixcontact.net/download](http://www.phoenixcontact.net/download).



This data sheet is valid for all products listed on the following page:

### 3 Ordering Data

#### Products

Description	Type	Order No.	Pcs./Pkt
<b>VARIOFACE Professional</b> , with two common busbars for potential distribution, 2 power terminals, 8 distributor blocks	VIP-2/SC/PDM-2/16	2315256	1
<b>VARIOFACE Professional</b> , with two common busbars for potential distribution, 2 power terminals, 12 distributor blocks	VIP-2/SC/PDM-2/24	2315269	1
<b>VARIOFACE Professional</b> , with two common busbars for potential distribution, 2 power terminals, 16 distributor blocks	VIP-2/SC/PDM-2/32	2315272	1

### 4 Technical Data

#### General Data

Ambient temperature range (operating)	-20 to 50°C
Ambient temperature range (storage/transport)	-20 to 70°C
Humidity, permissible	95% non-condensing
Altitude, maximum	2000 m
Intended use	Indoors
Pollution degree	2
Mounting	NS 35 (EN 50022), any orientation
Surge voltage category (IEC, UL)	III
Surge voltage category (CSA)	II

#### Electrical Data

Operating voltage, $U_N$	250 V AC/DC
Nominal current, $I_N$ per branch (IEC)	15 A
Nominal current, $I_N$ per branch (CSA, UL)	12 A
Total current (per potential)	30 A

#### Connection Data

Connection type	Screw
Stripping length	8 mm
Supply connection data (IEC) (solid/stranded/AWG)	0.2-6.0 mm <sup>2</sup> /0.2-4.0 mm <sup>2</sup> /24-10 AWG
Distribution connection data (UL, CSA) (solid/stranded/AWG)	0.2-4.0 mm <sup>2</sup> /0.2-2.5 mm <sup>2</sup> /24-12 AWG
Screw thread	M3
Tightening torque	0.5-0.6 Nm

#### Conformance/Approval

Air creepage distances	DIN EN 50178, IEC 62103 (in parts)
UL/cUL	UL 508 (E238705)
CSA	61010-01: 04

## Dimensions

	Width	Depth	Height
VIP-2/SC/PDM-2/16	50.0	50.0	65.5
VIP-2/SC/PDM-2/24	70.4	50.0	65.5
VIP-2/SC/PDM-2/32	90.8	50.0	65.5

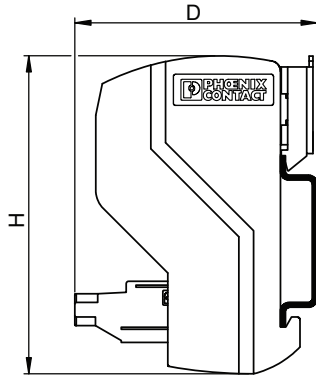


Figure 1 VIP-2/SC/PDM-2/... dimensions

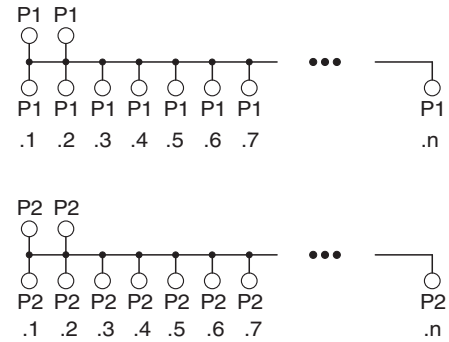


Figure 2 Circuit diagram