



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Energy storage - UPS-BAT/VRLA/24DC/38AH - 2320335

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Energy storage device, lead AGM, VRLA technology, 24 V DC, 38 Ah, automatic detection, and communication with QUINT UPS-IQ

Why buy this product

- Communication with QUINT UPS IQ
- Consists of 2 x 12 V battery modules and an electronic monitoring unit



Key Commercial Data

Packing unit	1 STK
Custom tariff number	85072080
Country of origin	China

Technical data

Dimensions

Width	330 mm
Height	221 mm
Depth	197 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	0 °C ... 40 °C
Max. permissible relative humidity (operation)	95 %

Input data

Nominal input voltage	24 V DC
Buffer period	72 min. (20 A)
	35 min. (40 A)

Energy storage - UPS-BAT/VRLA/24DC/38AH - 2320335

Technical data

Output data

Nominal output voltage	24 V DC
Output current I_{max}	45 A
Connection in series	No
Output fuse	2x 25 A ATOF 32V

General


IQ technology	Yes
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations. They can also be returned to Phoenix Contact or the manufacturer.
Net weight	26 kg
Memory medium	Lead rechargeable battery module
Protection class	III
Mounting position	Horizontally, on a mounting plate

Standards and Regulations

Shock	18 ms, 30g, in each space direction (according to IEC 60068-2-27)
Connection in acc. with standard	CUL
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950
	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)
VdS approval	G 100002
Vibration (operation)	< 15 Hz, amplitude ± 2.5 mm, 15 - 150 Hz, 2.3g/2.3g according to IEC 60068-2-6
	15 Hz ... 150 Hz, 2.3g, 90 min.

Drawings

Block diagram

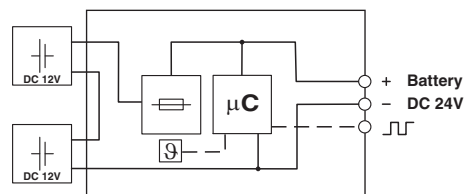

Energy storage - UPS-BAT/VRLA/24DC/38AH - 2320335

Classifications

eCl@ss

eCl@ss 4.0	27040603
eCl@ss 4.1	27040603
eCl@ss 5.0	27040603
eCl@ss 5.1	27040603
eCl@ss 6.0	27040603
eCl@ss 7.0	27049201
eCl@ss 8.0	27050403
eCl@ss 9.0	27050403

ETIM

ETIM 2.0	EC000382
ETIM 3.0	EC000382
ETIM 4.0	EC000357
ETIM 5.0	EC000357

UNSPSC

UNSPSC 6.01	30211510
UNSPSC 7.0901	39121011
UNSPSC 11	39121011
UNSPSC 12.01	39121011
UNSPSC 13.2	39121011

Approvals

Approvals

Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / EAC / ABS / DNV GL / cULus Recognized / cULus Listed

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approvals submitted

Approval details

Energy storage - UPS-BAT/VRLA/24DC/38AH - 2320335

Approvals

UL Recognized

UL Listed

cUL Recognized

cUL Listed

EAC

ABS

DNV GL

mm ² /AWG/kcmil	6
Nominal current I _N	41 A
Nominal voltage U _N	500 V

cULus Recognized

cULus Listed

Accessories

Accessories

Fuse

Energy storage - UPS-BAT/VRLA/24DC/38AH - 2320335

Accessories

Fuse - SI FORM C 25 A DIN 72581 - 0913757



Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A

Fuse - FUSE 25A/32V ATOF - 2908366



Fuse, nominal current: 25 A, length: 19.1 mm, width: 5 mm, height: 18.8 mm

Mounting material

Mounting set for securing the batteries - BATTERY MOUNTING CASE - 2320458



Used for mounting batteries that cannot be mounted on DIN rails.

Mounting set for securing the batteries - BATTERY MOUNTING KIT - 2320788



Used for mounting batteries that cannot be mounted on DIN rails.
