



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Energy storage - UPS-BAT/LI-ION/24DC/120WH - 2320351

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Energy storage device, LI-ION technology, 24 V DC, 120 Wh, for ambient temperatures of -20°C ... 60°C, automatic detection and communication with QUINT UPS-IQ

### Why buy this product

- Tool-free battery replacement
- Communication with QUINT UPS IQ
- High energy density



### Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	3960.0 g
Custom tariff number	85076000
Country of origin	China

### Technical data

#### Dimensions

Width	135 mm
Height	202 mm
Depth	110 mm

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 65 °C
Max. permissible relative humidity (operation)	≤ 80 %

#### Input data

Nominal input voltage	24 V DC
-----------------------	---------

## Energy storage - UPS-BAT/LI-ION/24DC/120WH - 2320351

### Technical data

#### Input data

Buffer period	14 min. (20 A)
---------------	----------------

#### Output data

Nominal output voltage	24 V DC
Output current $I_{max}$	30 A
Connection in parallel	3
Connection in series	No
Output fuse	1x 30 A ATOF 32V (breaking capacity 1000 A)

#### General

IQ technology	Yes
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations. They can also be returned to Phoenix Contact or the manufacturer.
Net weight	2.9 kg
Memory medium	LI-ION, 120 Wh
Protection class	III
Mounting position	horizontal DIN rail NS 35, EN 60715


#### Standards and Regulations

Shock	18 ms, 30g, in each space direction (according to IEC 60068-2-27)
Connection in acc. with standard	CUL
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950
	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)
Vibration (operation)	< 15 Hz, amplitude $\pm 2.5$ mm, 15 - 150 Hz, 2.3g/2.3g according to IEC 60068-2-6
	15 Hz ... 150 Hz, 2.3g, 90 min.

### Drawings

# Energy storage - UPS-BAT/LI-ION/24DC/120WH - 2320351

Block diagram

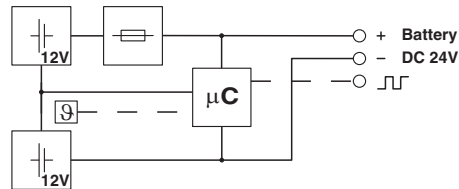

## Classifications

### eCl@ss

eCl@ss 4.0	27040603
eCl@ss 4.1	27040603
eCl@ss 5.0	27040603
eCl@ss 5.1	27040603
eCl@ss 6.0	27040603
eCl@ss 7.0	27049201
eCl@ss 8.0	27050403
eCl@ss 9.0	27050403

### ETIM

ETIM 2.0	EC000382
ETIM 3.0	EC000382
ETIM 4.0	EC000357
ETIM 5.0	EC000357

### UNSPSC

UNSPSC 6.01	30211510
UNSPSC 7.0901	39121011
UNSPSC 11	39121011
UNSPSC 12.01	39121011
UNSPSC 13.2	39121011

## Approvals

### Approvals

#### Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / EAC / cULus Recognized / cULus Listed

# Energy storage - UPS-BAT/LI-ION/24DC/120WH - 2320351

## Approvals

Ex Approvals

UL Listed / cUL Listed / cULus Listed


---


Approvals submitted


---

### Approval details


UL Recognized 


UL Listed 

cUL Recognized 

cUL Listed 

EAC

cULus Recognized 

cULus Listed 

## Accessories

Accessories

Assembly adapter

## Energy storage - UPS-BAT/LI-ION/24DC/120WH - 2320351

### Accessories

Assembly adapters - QUINT-ADAPTER/4 - 2866857

Assembly adapter for QUINT-BAT/24DC... on 35mm rail



---

### Fuse

Fuse - SI FORM C 25 A DIN 72581 - 0913757



Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A

---

Fuse - FUSE 30A/32V ATOF - 2908365



Fuse, nominal current: 30 A. Length: 19.1 mm, width: 5 mm, height: 18.8 mm