



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Passive module - FLKM-2KS40/SPT/CS - 2321826

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



1:1 interface module for Yokogawa AAV 141, AAV 142, AAT 141, AAI 141, AAI 143 analog I/O modules, AAV 542, AAI 543, AAI 841, AAB 841, AAI 135, AAP 135, AAI 835 and AAR 181. Redundant system connection, spring-cage connection on the field side.



### Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	365.000 g
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### Dimensions

Width	194.5 mm
Height	126 mm
Depth	40 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. perm. operating voltage	24 V DC $\pm$ 10 %
Max. perm. current (per branch)	1 A
Mounting position	any
Assembly instructions	In rows with zero spacing
Standards/regulations	DIN EN 50178
Rated surge voltage	0.8 kV

# Passive module - FLKM-2KS40/SPT/CS - 2321826

## Technical data

### General

Degree of pollution	2
Overvoltage category	III

### Connection data for connection 1

Connection name	Field level
Connection method	Spring-cage connection
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data for connection 2

Connection name	Controller level
Connection method	Yokogawa KS-compatible
Torque	0.5 Nm
Number of connections	1
Number of positions	40
Note	Usable system cables: Phoenix Contact YUC40, Yokogawa KS1

### Supported controller

Controller	YOKOGAWA CS3000 CentumVP
- suitable I/O card	AAI543
	AAI141
	AAI143
	AAI835
	AAI841
	AAI135
	AAR181
	AAT141
	AAV141
	AAV142
	AAB841
	AAV542
Controller	YOKOGAWA STARDOM
- suitable I/O card	NFAI141
	NFAI43
	NFAI543
	NFAI135
	NFAP135
	NFAV141

# Passive module - FLKM-2KS40/SPT/CS - 2321826

## Technical data

### Supported controller


	NFAV142
	NFAV542
	NFAB841
	NFAI841
	NFAI835

### Standards and Regulations

Standards/regulations	DIN EN 50178
Degree of pollution	2
Overvoltage category	III


## Drawings

Dimensional drawing

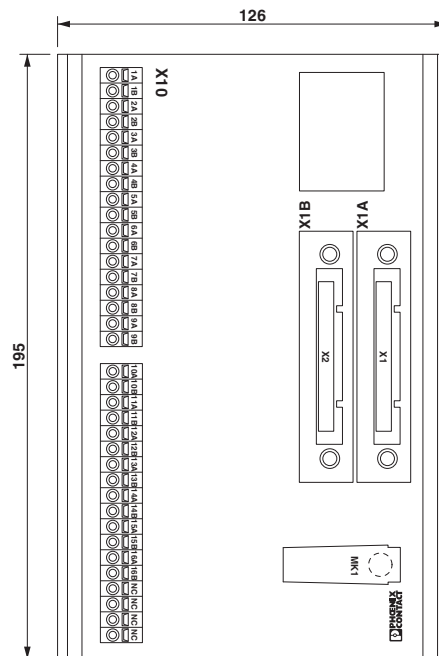

# Passive module - FLKM-2KS40/SPT/CS - 2321826

Circuit diagram

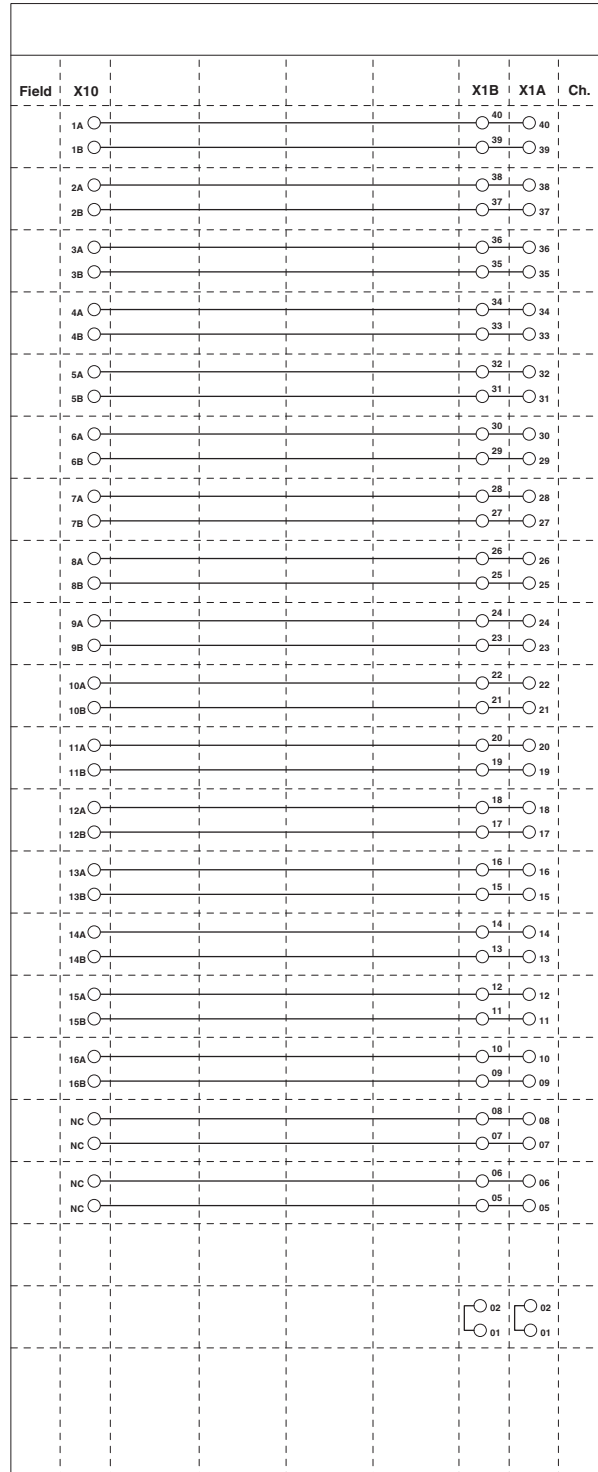



# Passive module - FLKM-2KS40/SPT/CS - 2321826

## Classifications

### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Approvals

### Approvals

---

Approvals

EAC

---

Ex Approvals

---

### Approval details

EAC EAC-Zulassung
-------------------

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

#### Accessories

#### Front adapter

##### Front adapters - FLK 40-PA/EZ-DR/KS/ 100/YUC - 2322786



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 1.0 m

---

##### Front adapters - FLK 40-PA/EZ-DR/KS/ 200/YUC - 2314341



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 2.0 m

---

##### Front adapters - FLK 40-PA/EZ-DR/KS/ 300/YUC - 2314354



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 3.0 m

---

##### Front adapters - FLK 40-PA/EZ-DR/KS/ 400/YUC - 2314367



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 4.0 m

---

##### Front adapters - FLK 40-PA/EZ-DR/KS/ 500/YUC - 2321570



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 5.0 m

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/ 600/YUC - 2314943



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 6.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/ 700/YUC - 2321583



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 7.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/ 800/YUC - 2314956



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 8.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/ 900/YUC - 2321415



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 9.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1000/YUC - 2314370



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 10.0 m

---



## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

#### Front adapters - FLK 40-PA/EZ-DR/KS/1100/YUC - 2321428



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 11.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1200/YUC - 2321431



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 12.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1300/YUC - 2321444



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 13.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1400/YUC - 2321457



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 14.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1500/YUC - 2314383



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 15.0 m

---

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

#### Front adapters - FLK 40-PA/EZ-DR/KS/1600/YUC - 2321596



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 16.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1700/YUC - 2321606



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 17.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1800/YUC - 2321619



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 18.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/1900/YUC - 2321622



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 19.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/2000/YUC - 2314532



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 20.0 m

---

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

#### Front adapters - FLK 40-PA/EZ-DR/KS/2500/YUC - 2314545



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 25.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/3000/YUC - 2314558



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 30.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/3500/YUC - 2901017



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 35.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/4000/YUC - 2901052



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 40.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/KS/4500/YUC - 2902912



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 45.0 m

---

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 100/YUC - 2904747



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 1.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 200/YUC - 2904748



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 2.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 300/YUC - 2904749



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 3.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 400/YUC - 2904750



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 4.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 500/YUC - 2904645



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 5.0 m

---

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

#### Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 600/YUC - 2904751



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 60.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 700/YUC - 2904752



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 7.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 800/YUC - 2904753



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 8.0 m

---

#### Cable - FLK 40-PA/EZ-DR/HF/KS/ 900/YUC - 2904754



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 9.0 m

---

#### Front adapters - FLK 40-PA/EZ-DR/HF/KS/1000/YUC - 2904646



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 10.0 m

---

## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/1500/YUC - 2904647



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 15.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/2000/YUC - 2904488



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 20.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/2500/YUC - 2904648



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 25.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/3000/YUC - 2904649



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 30.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/3500/YUC - 2904650



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 35.0 m

---



## Passive module - FLKM-2KS40/SPT/CS - 2321826

### Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/4000/YUC - 2904651



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 40.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/4500/YUC - 2904652



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 45.0 m

---

Front adapters - FLK 40-PA/EZ-DR/HF/KS/5000/YUC - 2904653



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 50.0 m

---