



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# VIP-3/SC/FLK34/LED

Order No.: 2322090



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322090>


VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 34-pos., with LED



Commercial data	
GTIN (EAN)	4046356451031
sales group	I500
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.182 KG
Catalog page information	Page 279 (IF-2009)

**Product notes**

WEEE/RoHS-compliant since:  
06/03/2009



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Nominal voltage $U_N$	24 V DC
Max. current carrying capacity per branch	1 A
Number of positions	34
Width	67.6 mm

Height	69 mm
Depth	62 mm
Status display	LED
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	Flat-ribbon cable connection
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	34

#### Certificates / Approvals



Certification

CUL, UL

**CUL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**Accessories**


Item	Designation	Description
<b>Cable/conductor</b>		
2299479	FLK 34/EZ-DR/ 50/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 0.5 m
2299482	FLK 34/EZ-DR/ 100/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1 m
2299495	FLK 34/EZ-DR/ 150/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1.5 m
2299505	FLK 34/EZ-DR/ 200/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 2 m
2299518	FLK 34/EZ-DR/ 300/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 3 m
2299521	FLK 34/EZ-DR/ 400/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 4 m
2299534	FLK 34/EZ-DR/ 600/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 6 m
2299547	FLK 34/EZ-DR/ 800/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 8 m
2299550	FLK 34/EZ-DR/1000/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 10 m
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length



**Diagrams/Drawings**

Circuit diagram

---

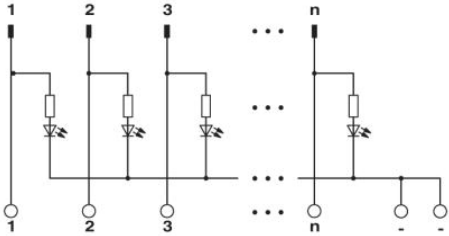

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;