



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VIP-PA-FLK50/ 1,0M/S7

Order No.: 2322456



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322456>

VIP VARIOFACE front adapter, with connected system cables for SMATIC S7-300, 1 x 32 channels can be connected, cable length: 1 m

Commercial data

GTIN (EAN)	4046356451895
sales group	I560
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.357 KG
Catalog page information	Page 238 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
12/18/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Note	Analog I/O cards: To avoid short-circuits, all bridges must be removed! No voltage supply may be supplied to the front adapter!
	Digital I/O cards: The front adapter is delivered non-isolated. By removing the bridges, electrical isolation (in groups of 8) can be obtained.

Nominal voltage U _N	< 50 V AC
	60 V DC
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	50
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Max. permissible current	1 A (per path)
Standards/regulations	IEC 60664
Rated surge voltage / insulation	0.8 kV
Pollution degree	2
Surge voltage category	III
Supported controller	SIEMENS S7-300 / ET 200 M
Supported I/O card	CPU 312C
	CPU 313C
	CPU 313C-2PtP
	CPU 313C-2DP
	CPU 314C-2PtP
	CPU 314C-2DP
	321-1BL00-0AA0
	322-1BL00-0AA0
	323-1BL00-0AA0
	331-1KF01-0AB0
	331-7NF00-0AB0
	331-7NF10-0AB0
	331-7PF01-0AB0
	331-7PF11-0AB0
	332-5HF00-0AB0
	350-2AH01-0AE0
	357-4AH01-0AE0


Certificates / Approvals



Certification CUL, UL

Diagrams/Drawings

Circuit diagram

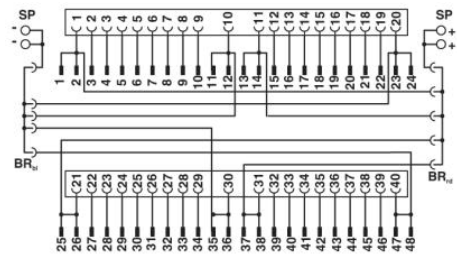

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;