



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





PLA/PHA Filament for 3D Printers - 1.75mm Diameter - 1KG - Glowfill

PRODUCT ID: 2338

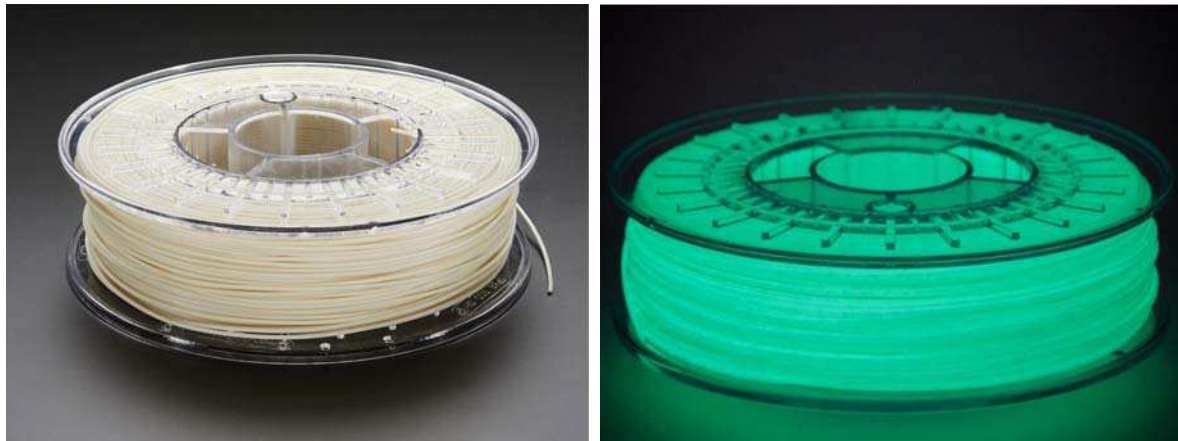

. Description

Having a 3D printer without filament is sort of like having a regular printer without paper or ink. And while a lot of printers come with some filament there's a good chance you've been printing up a storm and need something new. That's why we've started carrying a complete line of 3D printing filament in a variety of colors!

This **PLA/PHA 1.75mm Glowfill 1Kg spool** is a great basic material for 3D printers. 1.75MM diameter, PLA/PHA filament works with any of the printers in our shop that can use 1.75mm filament.

It's always a good idea to check what diameter and filament type your printers can handle before purchasing!

. Technical Details

Please note: PLA/PHA filament cannot be used with New Matter MOD-t 3D printers.

- Advised 3D printing temperature: 190-210°C
- Advised 3D print speed: 40 - 100 mm/s
- Advised Heated bed (if you have one, not strictly necessary): 50-60°
- Diameter Tolerance: $\pm 0.05\text{mm}$
- Glass Transition Temperature: 55°C

