

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









VIP Microscopes 23880RB-ESD


Old item no.: 23880RB-ES



SYSTEM 273RB-LED VIP-ESD

VIP (Variable Inclination Position) Microscopes with 23mm optics system and 8X - 50X extended magnification range. (4X - 25Xmagnification and 186mm working distance when used with a 0.5X reducing lens, included.) Ergonomically designed variable inclination eyepieces allow 0^{ϱ} - 30^{ϱ} individualized adjustability permitting technicians to maintain a correct posture during use. Can be used with 15X and 200X 23mm eyepieces.

Electrical data	
Maximum frequency (Hz)	6 0
Minimum frequency (Hz)	5 0
Maximum voltage (V)	1 2 0
Voltage from (V)	1 0 0
Total consumption (W)	9
Lightsource	
Lightsource	LED
Number of lamps	4 0
CRI and/or Color Temperature	6000K
Body	
Body color	Black
Body material	Aluminum

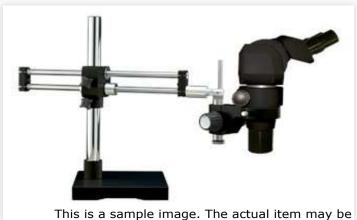

This is a sample image. The actual item may be different in color or otherwise from the image displayed.





Dimensions	
Net weight (kg)	0
Gross weight (lb.)	6 3
Arm length (in.)	2 2
Technical data	
IP classification	2 0
ESD-Safe	Yes
0.11	
Optic	
Material of diffuser	Polycarbonate
Working distance (mm)	9 1
Termination	
Cord length (ft)	5
Mounting	Boomstand