



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MicroModule PS/2 Data Sheet

## PS/2 MicroModule for Rugged Mousing Applications

### Features and Benefits

- Compact
- Durable
- Sealable design
- Easy to integrate
- Ultra-thin mounting profile

### Description


Both Mini Joystick and Finger Disk modules are dual click-button mousing devices designed for integration into tight, cramped spaces. The MicroModule is plug-and-play, utilizing standard mouse output. Several cabling options are available.




Gray Finger Disk Option



Black Finger Disk Option

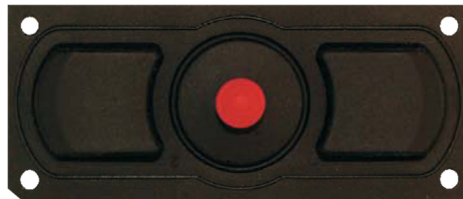


Mini Joystick Option

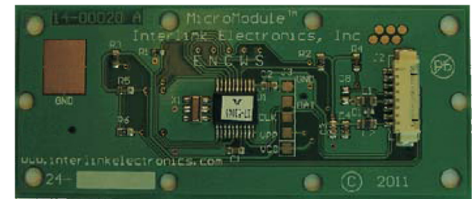

MicroModule Rear View

### User Control Options

The touch of a fingertip on the MicroModule delivers simultaneous 360° control of cursor direction and speed. Choose from 2 actuators styles, either Mouse Button (round disk with a divot for a fingertip), or a Mini Joystick (a compact stick).

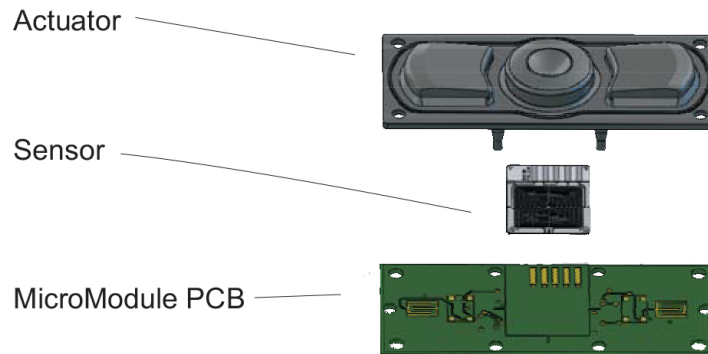

# MicroModule PS/2 Data Sheet

## PS/2 MicroModule for Rugged Mousing Applications

### Device Characteristics

Keypad Options	Black finger disk, gray finger disk, black mini joystick, black finger disk fluorosilicone
Weight	15 grams or less
Operating Temperature Performance	Functional before, during, and after exposure to the below conditions:
Cold Dry	-25°C <=5%RH for 96 hours
Cold Humid	10°C 95%RH for 96 hours
Hot Dry	70°C <=10%RH for 96 hours
Hot Humid	70°C 95%RH for 96 hours
Storage Temperature Performance	Functional after 96 hours of exposure to the below conditions:
Cold Dry	-40°C <=5%RH
Hot Dry	85°C <=10%RH
Hot Humid	85°C 95%RH
Thermal Shock	Functional after 20 cycles of -40°C to 85°C with a 30 minute dwell time and 5 minute transitions
Finger Disk Lifetime Durability	>3.5 million actuations with 500g at 4Hz
Keypad Lifetime Durability	>1 million cycles with 500g at 4Hz
Drop Test	Dropped from 1 meter onto concrete on all six sides
Mechanical Shock	Comparable to MIL-STD-202, 80G accelerated in 11msec
Mechanical Vibration	Comparable to MIL-STD-202, Method 204, Condition A
Chemical Resistance	Keypad surface resistant to most common cleaners and spills for 24 hours. These include: water, soap, bleach, alcohol, ammonia NH4OH based window cleaner, acetic acid CH3COOH based cleaner, cola, coffee with sugar and creamer. Robust MicroModule with Fluorosilicone keypad is also resistant to a variety of oils, fuels, and solvents.
UL	All materials UL grade 94 V-1 or better
RoHS	Compliant

# MicroModule PS/2 Data Sheet

PS/2 MicroModule for Rugged Mousing Applications

## Connector Options

### Header

The connector for the MicroModule is a wire to board header connector. The header is a Molex #53261-0871



### Header Wire and Cable Options

- PS/2 Cable Assembly, PN 14-00053
- PS/2 Cable Assembly with Strain Relief, PN 14-00225
- 12" Wire Cable Harness, PN 14-16576

## Application Information


### Mounting

Can be fitted into various assemblies to meet specific demands for user control locations.

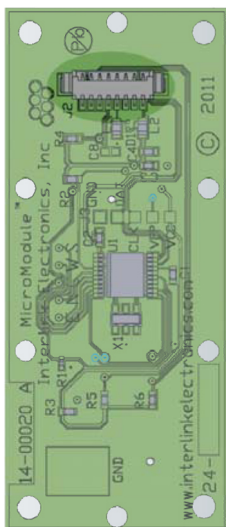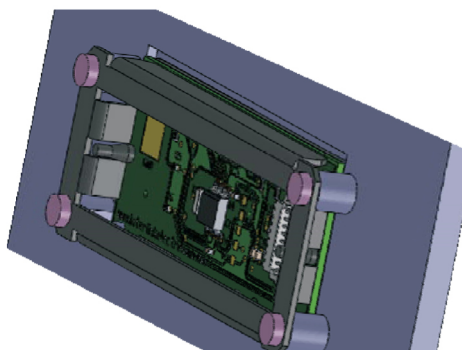


### Mounting Recommendations

See the Integration Guide for more detailed mounting instructions.

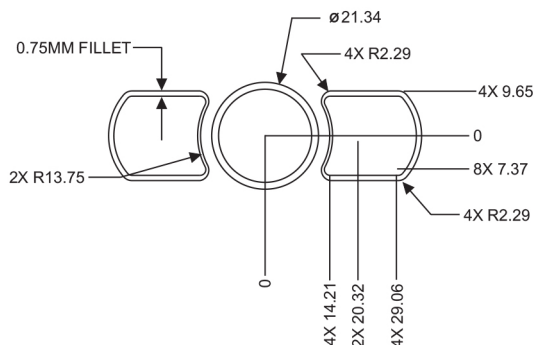

### Pin Out

J2 Pin	Signal	Signal Description
1	VCC	+5v
4	GND	Ground
7	CLK	Clock
8	DATA	Data



# MicroModule PS/2 Data Sheet

PS/2 MicroModule for Rugged Mousing Applications

## Orderable Part Numbers

### Hardware Development Kit, 54-00050

This Hardware Development Kit includes:

- MicroModule PS/2 Demo w with Cable (Qty. 1)
- MicroModule PS/2 with MiniJoystick (Qty. 1)
- Gray Finger Disk Keypad (Qty. 1)
- 12" Wire Cable Harness (Qty. 1)
- PS/2 Cable Assembly (Qty. 1)
- USB Flash drive with product literature (Qty. 1)

**PS/2 MicroModule with Black Finger Disk, PN 54-00045**

**PS/2 MicroModule with Gray Finger Disk, PN 54-00055**


**PS/2 MicroModule with MiniJoystick, PN 54-00056**

**PS/2 MicroModule with Black Finger Disk (Flourosilicone), PN 54-00060**

**12" Wire Cable Harness, PN 14-16576**

**PS/2 Cable Assembly, PN 14-00053**

**PS/2 Cable Assembly with Strain Relief, PN 14-00225**

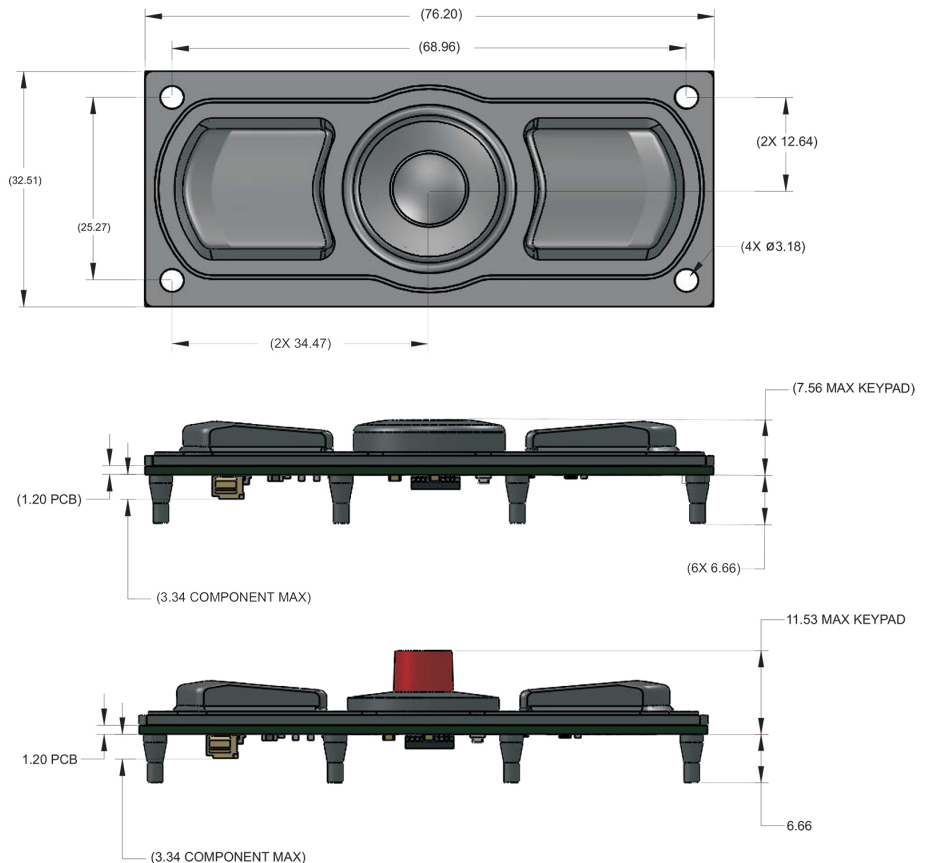

## Contact Us

### United States Corporate Office

Interlink Electronics, Inc.  
31248 Oak Crest Drive  
Suite 110  
Westlake Village, CA 91361 USA  
Phone: +1 (805) 484-8855  
Fax: +1 (805) 484-9457  
www.interlinkelectronics.com  
Sales & Support: sales@iefsr.com