

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







NOTES:

REFERENCE STANDARD IEC60169-11 (4.1/9.5) IEC60169-16 (N)

I. ELECTRICAL PERFORMANCE -

NOMINAL IMPEDANCE : 50 Ω FREQUENCY RANGE : DC-3.0 GHz : I.065 MAX. VSWR

: -160dBc MAX.(1800MHz) PIM : 0.05 dB MAX.(@3.0 GHz) : 5000 M Ω MIN. INSERTION LOSS

INSULATION RESISTANCE : 2500 VRMS D.W.V

: OUTER CONDUCTOR 0.4 m Ω MAX (N) 0.5 m Ω MAX (4.1/9.5) INNER CONDUCTOR 0.8 m Ω MAX (N) 1.0 m Ω MAX (4.1/9.5) CONDUCTOR RESISTANCE

II. MECHANICAL PERFORMANCE -

NUT - TORQUE : 10-12 N-m NUT - AXIAL PULL : 500 N

III.MATERIAL AND PLATING -

INNER CONDUCTOR : SPRING COPPER ALLOY, PLATING = Ag (5µm MIN.)

OUTER CONDUCTOR : BRASS, PLATING = Ag (5µm MIN.)
NUT : BRASS, PLATING = NI (5µm MIN.)

: SILICONE RUBBER GASKET


INSULATOR

IV. ENVIRONMENTAL -


: -40°C TO +85°C TEMP RANGE WEATHER STANDARD : IEC 60068 40/ 85/ 21 THERMAL SHOCK : IEC 60068-2-14-NA : IEC 60068-2-6-FC : IEC 60068-2-27 VIBRATION SHOCK

V. ROHS COMPLIANT





SCALE 1.000

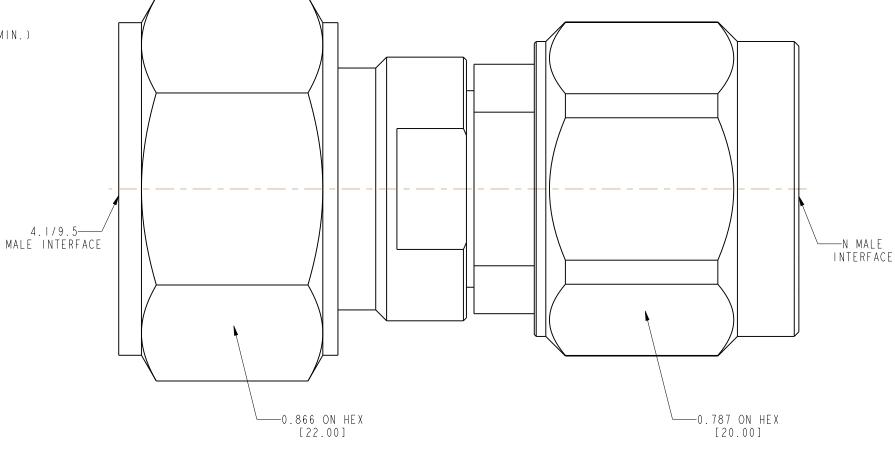

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL 4.015 (0,381 mm) ±.005 (0,127 mm) ± 1° 0.55 NOTES	DRAWN A ARUN PRABU	DATE 05-Sep-13	4.1/9.5 MALE TO	Amphenol
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are	ENGINEER A ARUN PRABU	DATE 05-Sep-13 NMALE ADAPTER	Connex	
confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	APPROVED B.C. GLEISSNER	DATE 10-Sep-13		SCALE: 4.0:1 SHEET I OF I
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CAD FILE		DWG SIZE DRAWING	NO. 242283 REV