



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 2383 & 2440 Miniature Insulating Binding Post With Double Mounting Base

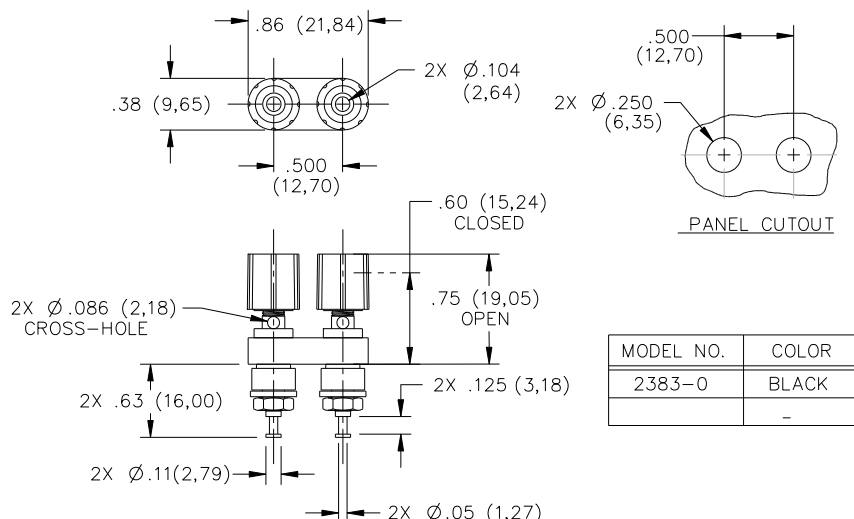

FEATURES:

- Accepts miniature banana plugs
- #8-32 hex nut and lockwasher included
- Mounts in panels up to 4.8 (.188) thick

MATERIALS:

Insulated Captive Thumb Nut: Brass

Finish: Model 2383 Gold plated brass

Model 2440 Tin plated brass

Insulation: Polycarbonate. Color: One black and one red

Mounting Base: Black Polycarbonate. Marking: "POMONA ELECTRONICS CALIF.

Insulator: Polycarbonate. One black and one red

Lockwasher: Steel. Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches

Hex Nut: Brass. Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Binding Post: Brass, Alloy 360, ½ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074

RATINGS:

Operating Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 1500 VDC Max.

Operating Temperature: +115°C (+239°F) Max.

Current: 5 Amperes

ORDERING INFORMATION: Model 2383-* & 2440-*

*=Color, -0 Black,

Ordering Example: 2383-0 Color is Black

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA