



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015

Page 1 of 9

## General Specifications

<b>Part Number</b>	2450AD47A1590					
<b>Frequency (MHz)</b>	2400~2500	1561	1575	1602		
<b>Peak Gain (dBi typ.)</b>	1.0 (YZ-Total)	0.5 (YZ-Total)	1.5 (YZ-Total)	1.5 (YZ-Total)		
<b>Average Gain (dBi typ.)</b>	-1.0 (YZ-Total)	-2.5 (YZ-Total)	-2.0 (YZ-Total)	-2.0 (YZ-Total)		
<b>Return Loss (dB)</b>	8 min.	7.5 min.	9.0 min.	8 min.	<b>Reel Quantity</b>	1,000
<b>Ave Radiation Efficiency %<sup>1</sup> (on JTI EVB)</b>	83	45	51	51	<b>Operating Temperature</b>	-40 to +85°C
<b>Isolation</b>	20 dB	15 dB	15 dB	15 dB	<b>Storage Temperature</b>	-40 to +85°C
					<b>Storage Period</b>	18 months max.
					<b>Power Capacity</b>	2W max. (CW)



<sup>1</sup>On Johanson test board p/n: 2450AD47A1590-EB1SMA. EVB details on pages 2/3

## Part Number Explanation


<b>P/N Suffix</b>	<b>Packing Style</b>	Bulk (loose)	Suffix = S	e.g.. 2450AD47A1590S
		T & R	Suffix = E	e.g.. 2450AD47A1590E
		100% Tin	Suffix = E or S	e.g.. 2450AD47A1590(E or S)
	<b>Evaluation Board</b>	2450AD47A1590-EB1SMA (Pre-tuned with SMA connectors)		

## Mechanical Dimensions

	In	mm
<b>L</b>	0.394 ± 0.008	10.00 ± 0.20
<b>W</b>	0.126 ± 0.008	3.20 ± 0.20
<b>T</b>	0.059 ± 0.008	1.50 ± 0.20
<b>a1</b>	0.031 ± 0.008	0.80 ± 0.20
<b>a2</b>	0.106 ± 0.008	2.70 ± 0.20
<b>a3</b>	0.039 ± 0.008	1.00 ± 0.20
<b>b</b>	0.012 ± 0.004/-0.008	0.30 ± 0.1/-0.2

## Terminal Configuration

No.	Function
1	2.4GHz Feed Point
2	GND
3	GND
4	1.5-1.6GHz Feed Point
5	GND
6	GND
7	GND
8	GND



Find out more about our antenna design assistance services at:

<http://www.johansontechnology.com/ipc-antenna-services>



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved


# "High Frequency Ceramic Solutions"

BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015

Page 2 of 9

## Layout Recommendations

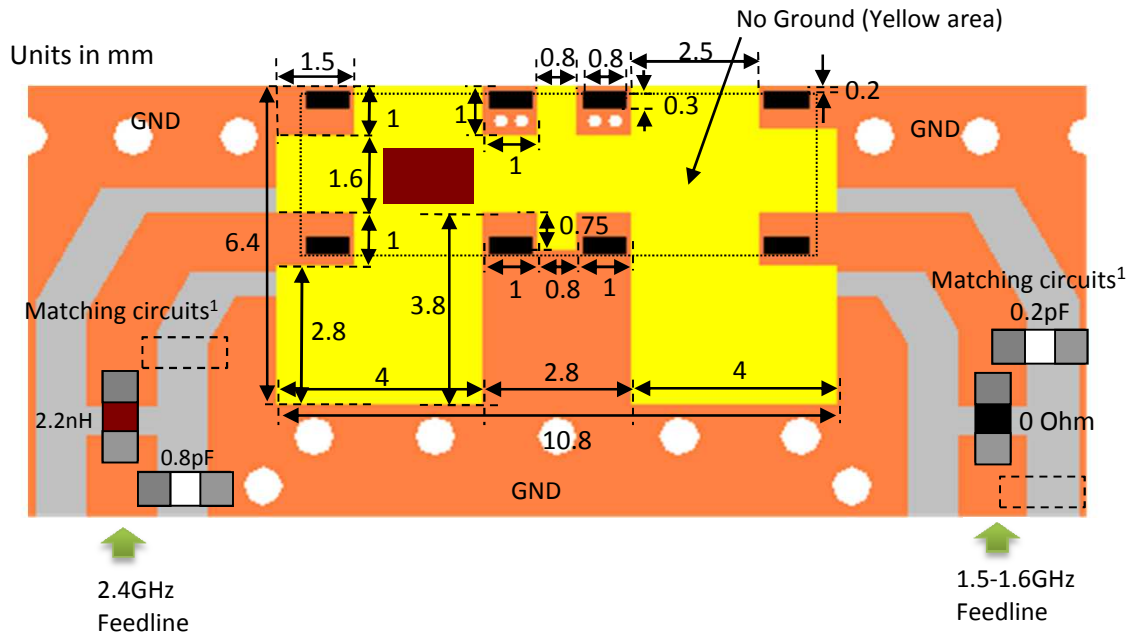

Would you like the layout file of the above? Contact our applications engineers at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

<sup>1</sup>Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

Orderable EVB for evaluation, it comes with a female SMA connector. Go to: [www.johansontechnology.com/component/samplerrequest](http://www.johansontechnology.com/component/samplerrequest) and ask for p/n 2450AD47A1590-EB1SMA

\* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material, thickness, and preferably CPWG (co-planar wave guide) type.

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015


Page 3 of 9

## Typical Electrical Characteristics (T=25°C)

### ❖ Test Board-Top View (Unit in mm)

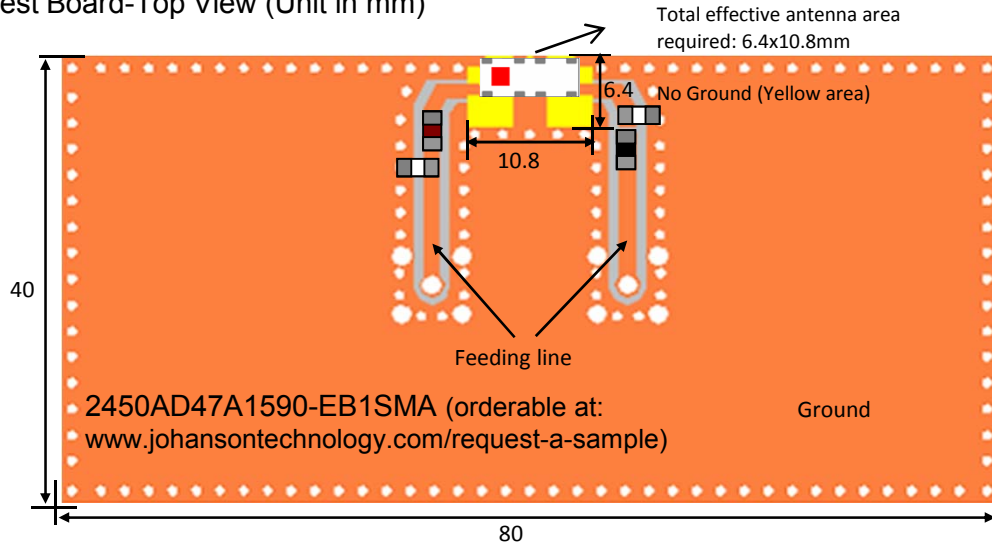

### ❖ Test Board-Bottom View (Unit in mm)

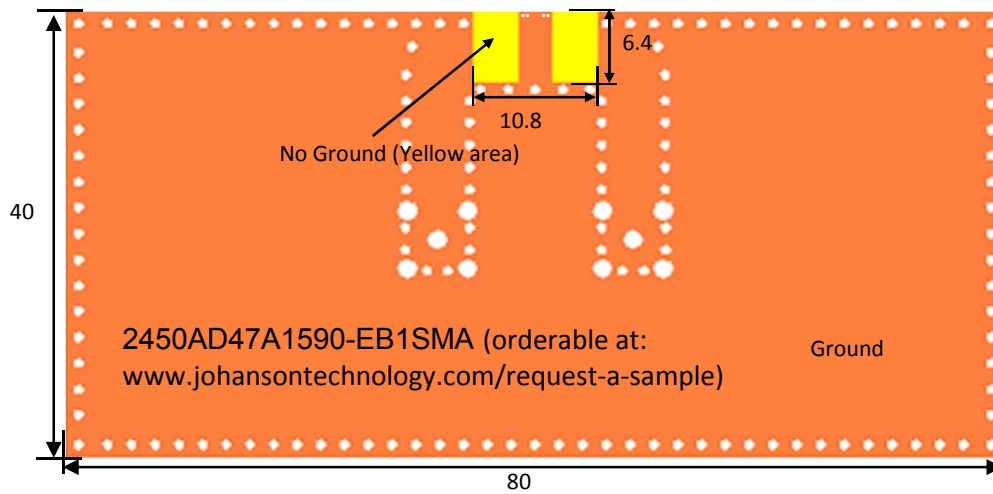

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015

Page 3 of 9

## Typical Electrical Characteristics (T=25°C)

Return Loss and Isolation With Matching Circuits On Johanson EVB

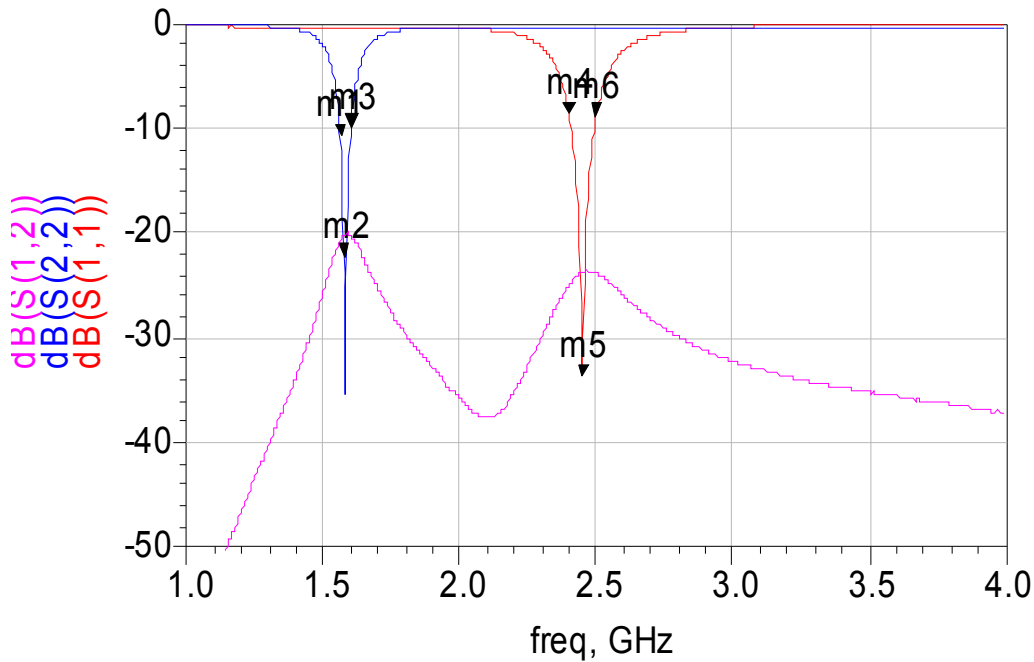

m1	m4
Freq=1.561GHz	Freq=2.400GHz
dB(S(2,2))=-10.697	dB(S(1,1))=-8.678
m2	m5
Freq=1.575GHz	Freq=2.450GHz
dB(S(2,2))=-22.294	dB(S(1,1))=-33.793
m3	m6
Freq=1.602GHz	Freq=2.500GHz
dB(S(2,2))=-9.842	dB(S(1,1))=-8.901

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015


Page 5 of 9

## Typical Radiation Patterns


❖ Radiation Patterns @ 2.44GHz

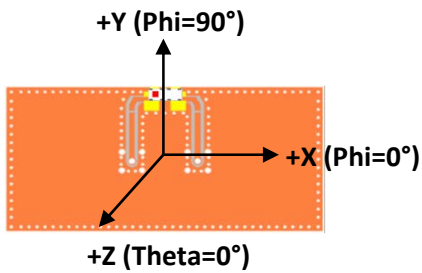


XY-Plane

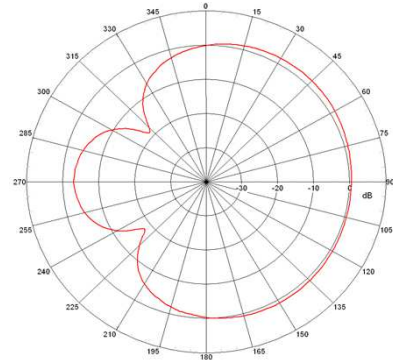

YZ-Plane

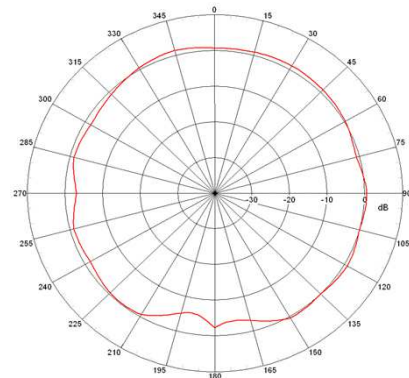

XZ-Plane

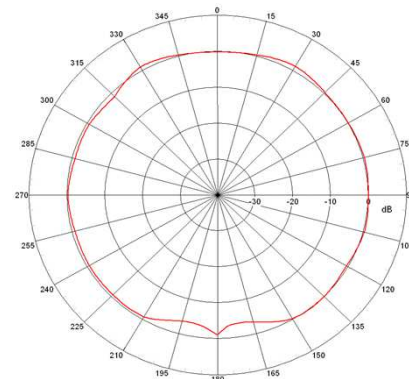

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015


Page 6 of 9

## Typical Radiation Patterns


❖ Radiation Patterns @ 1.561GHz

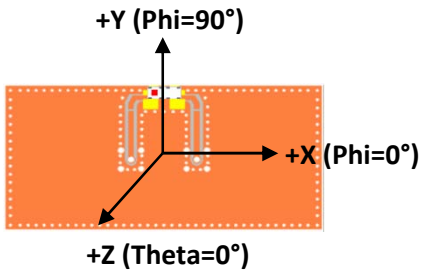


XY-Plane

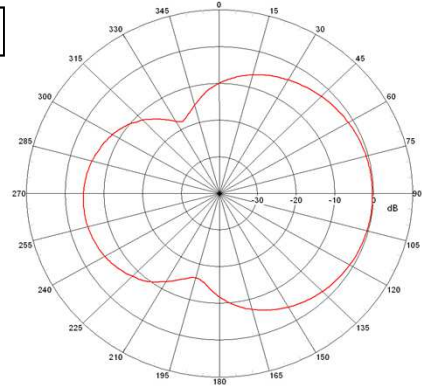

YZ-Plane

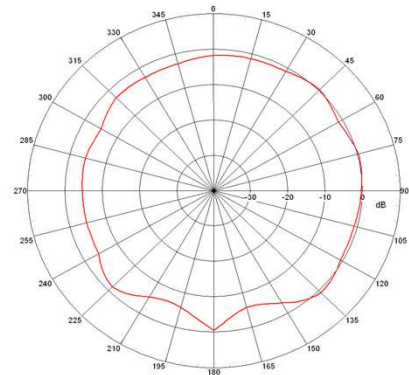

XZ-Plane

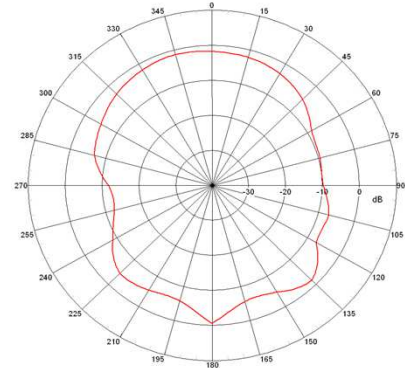

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015


Page 7 of 9

## Typical Radiation Patterns


❖ Radiation Patterns @ 1.575GHz

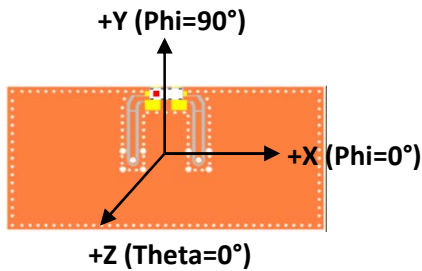


XY-Plane

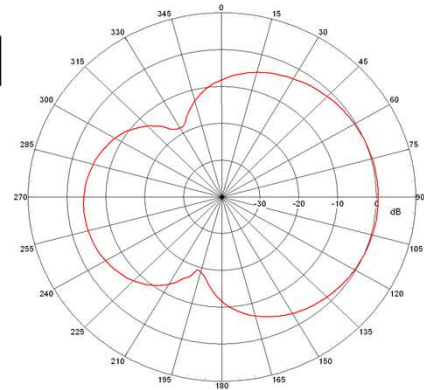

YZ-Plane

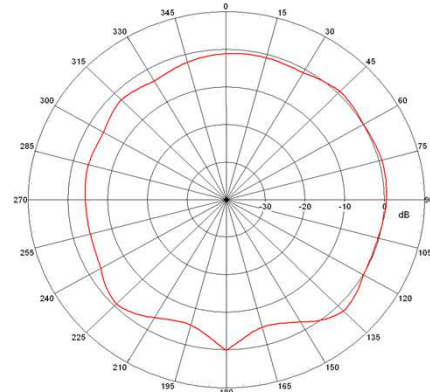

XZ-Plane

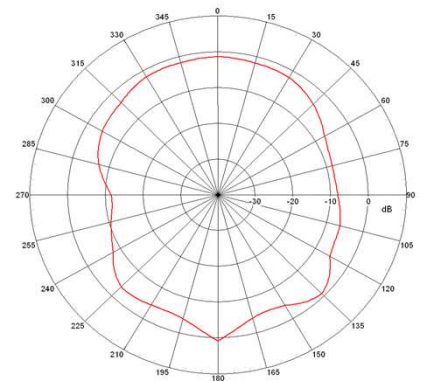

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved



# "High Frequency Ceramic Solutions"


BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015


Page 8 of 9

## Typical Radiation Patterns


❖ Radiation Patterns @ 1.602GHz

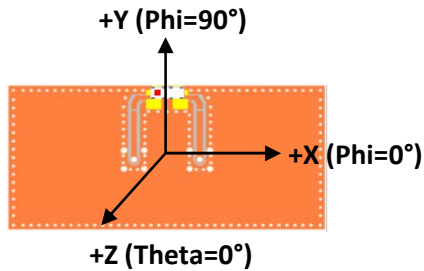


XY-Plane

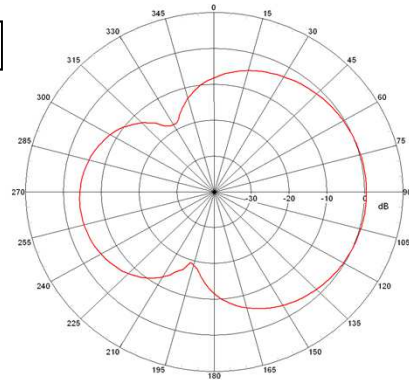

YZ-Plane

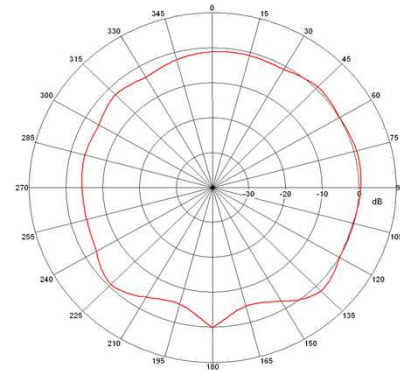

XZ-Plane

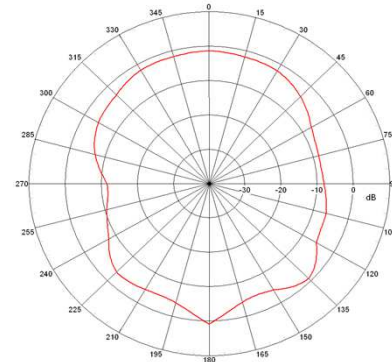

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"

BT/WiFi and GPS/BDS/GLNSS Quad band, Dual Feed Chip Antenna: 2.4/1.561/1.575/1.602GHz, SMD P/N 2450AD47A1590

Detail Specification: 11/10/2015

Page 9 of 9

## Antenna tuning, optimization, and validation services:

[www.johansontechnology.com/ipcantennaservices](http://www.johansontechnology.com/ipcantennaservices)

## For more antennas and to download measured S-parameters, go to:

[www.johansontechnology.com/antennas](http://www.johansontechnology.com/antennas)

## Soldering Information

[www.johansontechnology.com/ipcsoldering-profile](http://www.johansontechnology.com/ipcsoldering-profile)

## MSL Info

[www.johansontechnology.com/technical-notes/msl-rating.html](http://www.johansontechnology.com/technical-notes/msl-rating.html)

## Packaging information

[www.johansontechnology.com/ipcpackaging.html](http://www.johansontechnology.com/ipcpackaging.html)

## For layout review contact our Applications Team at:

[www.johansontechnology.com/component/techquestion](http://www.johansontechnology.com/component/techquestion)

## RoHS Compliance

[www.johansontechnology.com/technical-notes/rohs-compliance.html](http://www.johansontechnology.com/technical-notes/rohs-compliance.html)

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2015 Johanson Technology, Inc. All Rights Reserved