



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# High Frequency Ceramic Solutions


**2.45GHz Mini (EIA 0504) Passive Band Pass Filter, LGA pads, SMD**

**P/N 2450BP08A0100**

Detail Specification: 1/31/2017

Page 1 of 3

## General Specifications


<b>Part Number</b>	2450BP08A0100		
<b>Frequency (MHz)</b>	2400 ~ 2500		
<b>Insertion Loss (dB)</b>	1.0 max. @ 25°C		
<b>Return Loss</b>	9.0 dB min.		
<b>Attenuation (min.)</b>	15 min. @ 5 ~ 960MHz		
<b>Attenuation (min.)</b>	10 min. @ 1710 ~ 1990MHz		
<b>Attenuation (min.)</b>	15 min. @ 3600MHz		
<b>Attenuation (min.)</b>	25 min. @ 4800 ~ 7200MHz	<b>Recommended Storage Conditions for unused T&amp;R Product*</b>	+5 ~ +35°C, Humidity: 45~75%RH
<b>Reel Quantity</b>	4,000	<b>Solder Paste</b>	SAC 305 type is recommended.
<b>Operating/Strge Temp.</b>	-40 to +85°C	<b>Power Capacity</b>	2W max.(CW)
<b>Storage Period</b>	18 months max.*		

\*18 months in vacuum sealed bag and 1 week after opened. Please keep unused parts in vacuum sealed bags. For more info go to [www.johansontechnology.com/silverleads](http://www.johansontechnology.com/silverleads).

<b>P/N Suffix</b>	<b>Packing Style</b>	Bulk	Suffix = S	eg. 2450BP08A0100S
		T & R	Suffix = T	eg. 2450BP08A0100T
	<b>Evaluation Board</b>	2450BP08A0100-EB1SMA		


## Mechanical Specifications

	In	mm
L	0.055 ± 0.006	1.40 ± 0.15
w	0.043 ± 0.006	1.10 ± 0.15
T	0.024 max.	0.6 max
a	0.013 ± 0.004	0.33 ± 0.10
b	0.010 ± 0.004	0.25 ± 0.10
c	0.010 ± 0.002	0.25 ± 0.05
d	0.010 ± 0.002	0.25 ± 0.05

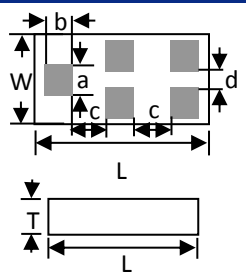

## Terminal Configuration

No.	Function	No.	Function
1	IN/OUT	4	IN/OUT
2	GND	5	GND
3	GND		



Want the layout file of the above? Send us a message at: [www.johansontechnology.com/component/techquestion](http://www.johansontechnology.com/component/techquestion)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1

2017 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions


2.45GHz Mini (EIA 0504) Passive Band Pass Filter, LGA pads, SMD

P/N 2450BP08A0100

Detail Specification: 1/31/2017


Page 2 of 3

## Mounting Considerations

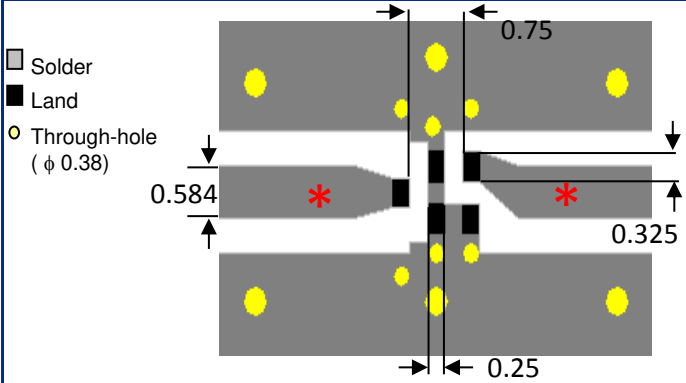


\* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.  
 Want the layout file of the above? Send us a message at:  
[www.johansontechnology.com/component/techquestion](http://www.johansontechnology.com/component/techquestion)

## Measuring Diagram

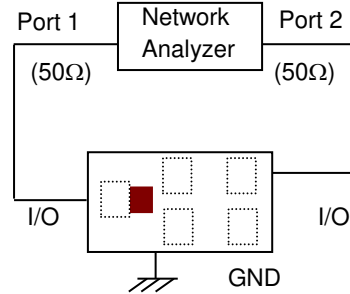

## Electrical Characteristics (T=25°C)

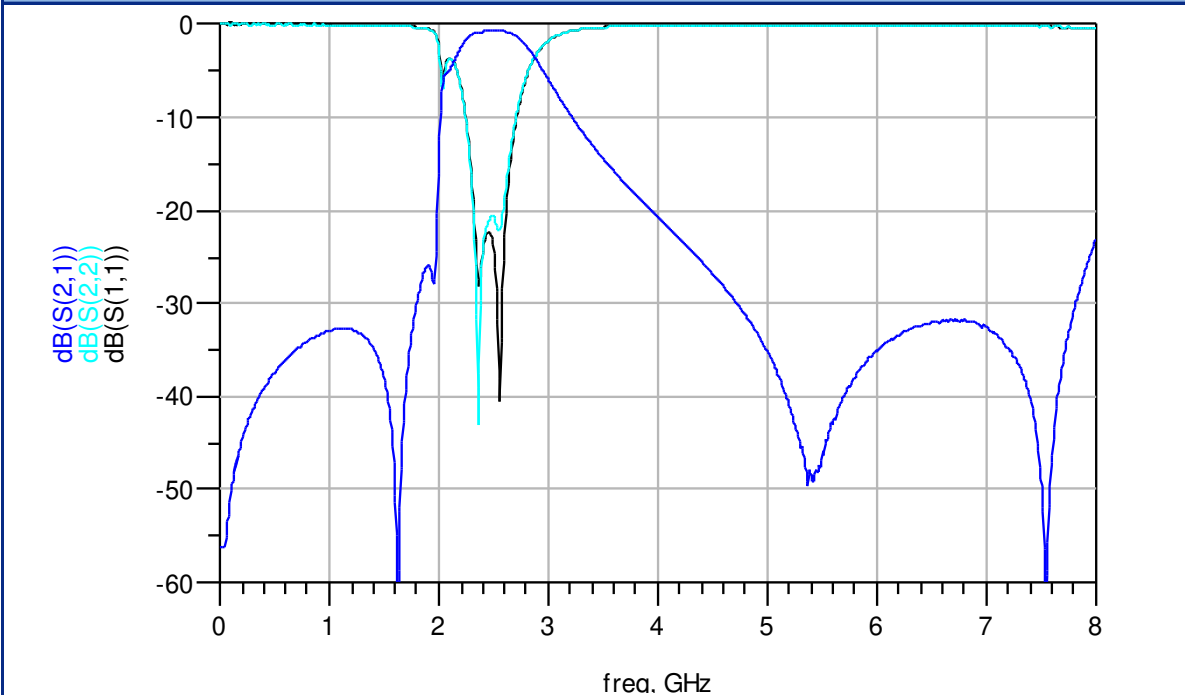

Johanson Technology, Inc. reserves the right to make design changes without notice.  
 All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1

2017 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

**2.45GHz Mini (EIA 0504) Passive Band Pass Filter, LGA pads, SMD**

**P/N 2450BP08A0100**

Detail Specification: 1/31/2017

Page 3 of 3

## More Band Pass Filters

[www.johansontechnology.com/band-pass-filters](http://www.johansontechnology.com/band-pass-filters)

## Packaging information

[www.johansontechnology.com/tape-reel-packaging](http://www.johansontechnology.com/tape-reel-packaging)

## Soldering Information

[www.johansontechnology.com/ipcsoldering-profile](http://www.johansontechnology.com/ipcsoldering-profile)

## MSL Info

[www.johansontechnology.com/msl-rating](http://www.johansontechnology.com/msl-rating)

## Recommended Storage Condition and Max Shelf Life

[www.johansontechnology.com/recommended-storage-conditions](http://www.johansontechnology.com/recommended-storage-conditions)

## RoHS Compliance

[www.johansontechnology.com/technical-notes/rohs-compliance](http://www.johansontechnology.com/technical-notes/rohs-compliance)

## Antenna layout and tuning techniques

[www.johansontechnology.com/tuning](http://www.johansontechnology.com/tuning)

## Antenna layout review, tuning, and characterization services

[www.johansontechnology.com/ipc-antenna-services](http://www.johansontechnology.com/ipc-antenna-services)

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1

2017 Johanson Technology, Inc. All Rights Reserved