



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# High Frequency Ceramic Solutions

## 2.45 GHz Band Pass Filter

P/N 2450BP15F0100

Detail Specification: 08/31/07

Page 1 of 2

### General Specifications

Part Number	2450BP15F0100	
Frequency (MHz)	2400 - 2500	
Insertion Loss	2.5 dB max.	
Return Loss	9.5 dB min.	
Attenuation (min.)	824 ~ 960MHz	35 dB
Attenuation (min.)	1710 ~ 1910MHz	38 dB
Attenuation (min.)	4800 ~ 5000MHz	25 dB
Attenuation (min.)	7200 ~ 7500MHz	20 dB

Input Power	3 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000


P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BP15F0100
		T & R	Suffix = E	Eg. 2450BP15F0100
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 2450BP15F0100(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 2450BP15F0100(E or S)/Pb

### Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

### Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.022 ± 0.004	0.55 ± 0.10
a	0.016 ± 0.008	0.40 ± 0.20
b	0.016 ± 0.008	0.40 ± 0.20
c	0.012 +.004/-.008	0.30 +0.1/-0.2
g	0.016 ± 0.008	0.40 ± 0.20
p	0.031 ± 0.004	0.80 ± 0.10




### Mounting Considerations

Mount these devices with brown mark facing up.

\* Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

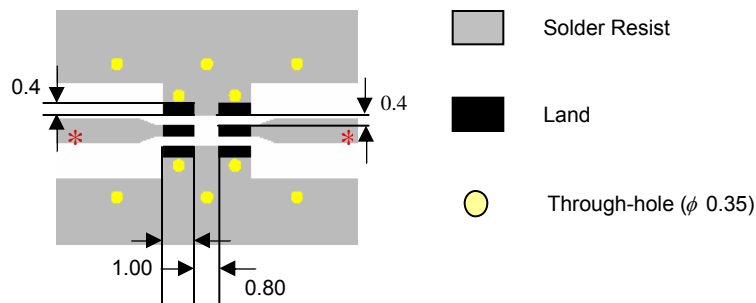

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechology.com](http://www.johansontechology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions


**2.45 GHz Band Pass Filter**

**P/N 2450BP15F0100**

Detail Specification: 08/31/07

Page 2 of 2

**Typical Electrical Performance (T=25°C)**

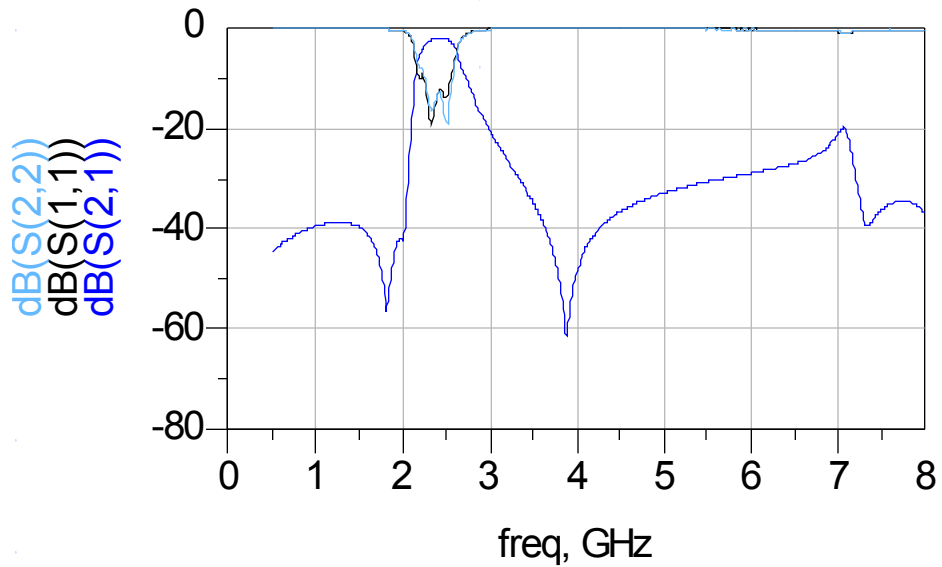

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved