



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



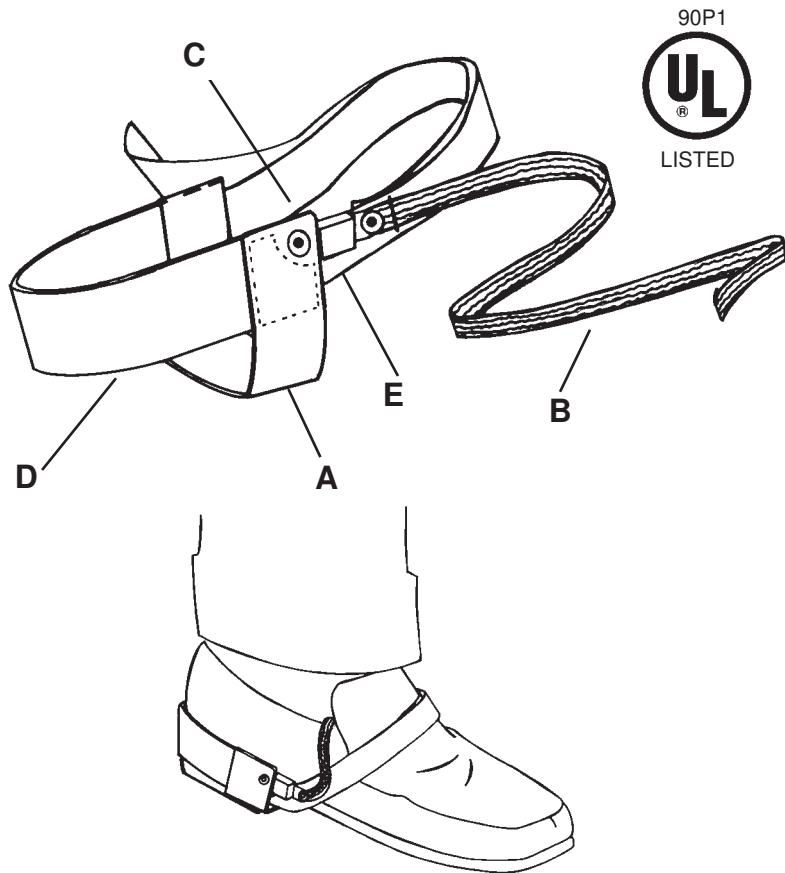

Description:

The 24723 heel grounder is manufactured from 2-layer conductive rubber with a white protective inner layer to avoid marring. The 24723 features a velcro fastening system for quick and easy installation. These units include a grey grounding tab with a one megohm current limiting molded exterior resistor in series with the ground path for the wearer's safety. The product has been tested to ESD STM 97.2 - Floor Materials and Footwear Voltage Measurement in Combination with a Person. It is a suitable ESD footwear component in Flooring - Footwear System when used as the primary grounding method ($<3.5 \times 10^7$ ohms per ESD STM 97.1 Floor Materials and Footwear-Resistance Measurement in Combination with a Person.)



Components:

- A. Two-layer high grade rubber, RTG: 10^6 ohms.
- B. Grey conductive grounding tab.
- C. Blue loop material with return hook tip for quick and easy adjustment, ensuring wearer's comfort.
- D. Black elastic material stretches for comfort.
- E. 1/4 watt, 1 megohm molded resistor.

ITEM NO.	DESCRIPTION
24723	Heel Grounder, 1 megohm resistor

Note:

Two heel straps are recommended for reliable grounding and ESD protection, providing ground when one foot is off the floor.
 Operator is grounded when foot is in contact with grounded dissipative or conductive flooring.
 ESD Systems.com recommends the use of 41203, 41205, 41220/41213, and 41220/41226 foot ground testers. Ask for Tech Briefs PS-2057 and PS-2094.
 For additional information on the use and maintenance of foot grounders please ask for Tech Brief PS-2030.
 No silicone is used in the materials that make our foot grounders.



Made in America

Our UL listed foot grounders are rated at 250 VAC. It is not recommended to use them where exposure to line voltages above 250 VAC is possible. **Caution:** The foot grounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

Wescorp Foot Grounder, Heel, Economy



432 NORTHBORO ROAD CENTRAL
 MARLBORO, MA 01752-3170
 PHONE (508) 485-7390
 FAX (508) 480-0257



Visit our online
 library of Tech Drawings:
<http://www.esdsystems.com>

DRAWING NUMBER
 TD-24723

DATE
 7/05