



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MULTI-LAYER HIGH-Q CAPACITORS

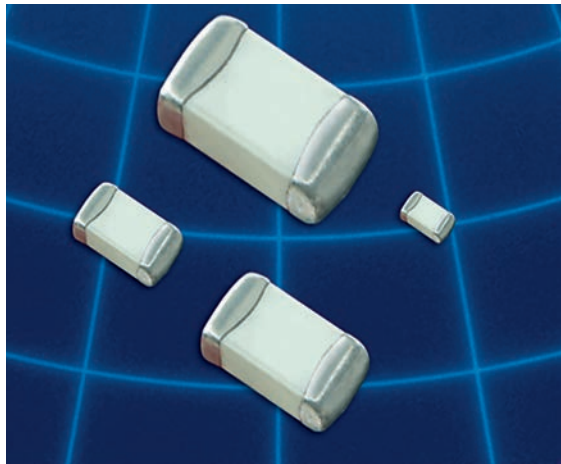

These lines of multilayer capacitors have been developed for High-Q and microwave applications.

- The **S-Series** (R07S, R14S, R15S) capacitors give an ultra-high Q performance, and exhibit NPO temperature characteristics.
- The **L-Series** (R05L) capacitors give mid-high Q performance, and exhibit NPO temperature characteristics.
- The **E-Series** (S42E, S48E, S58E) capacitors give excellent high-Q performance from HF to Microwave frequencies. Typical uses are high voltage, high current applications. They are offered in chip (Ni barrier or Non-Magnetic Pt.-Ag) or in Non-Magnetic leaded form.
- RoHS compliance is standard for all unleaded parts (see termination options box).
- Automotive versions (AEC-Q200) of R05L, R07S, R14S, R15S, and S42E series are available on request

HOW TO ORDER

252	S48	E	470	K	V	4	E	-AEC
WVDC² 250 = 25 V 500 = 50V 201 = 200 V 251 = 250 V 501 = 500 V 102 = 1000 V 152 = 1500 V 252 = 2500 V 362 = 3600 V 722 = 7200 V	CASE SIZE R05 (0201) R07 (0402) R14 (0603) R15 (0805) S42 (1111) S48 (2525) S58 (3838)	CAPACITANCE (pF) 1st two digits are significant; third digit denotes number of zeros, R = decimal. 100 = 10 pF 101 = 100 pF	TOLERANCE < 10pF A = ± 0.05 pF B = ± 0.10 pF C = ± 0.25 pF D = ± 0.50 pF ≥ 10pF F = ±1 % G = ±2% J = ±5% K = ± 10% For tolerance availability, see chart.	TERMINATION Nickel Barrier V = Ni/Sn (Green) T = Ni/SnPb G = Ni/Au (Green) Non-Mag¹ U = Cu/Sn (Green) C = Cu/SnPb Leaded (All Non-Mag)¹ 1 = Microstrip 2 = Axial Ribbon 3 = Axial Wire 4 = Radial Ribbon 5 = Radial Wire	PACKAGING S = Bulk W = Waffle Pack 0201 - 0603 Y = Paper 5" Reel T = Paper 7" Reel R ¹ = Paper 13" Reel J ¹ = Paper 5" Reel - Horizontally Oriented Electrodes N ¹ = Paper 5" Reel - Vertically Oriented Electrodes L ¹ = Paper 7" Reel - Horizontally Oriented Electrodes V ¹ = Paper 7" Reel - Vertically Oriented Electrodes 0805 - 3838 Z = Embossed 5" Reel E = Embossed 7" Reel U ¹ = Embossed 13" Reel M ¹ = Embossed 5" Reel - Horizontally Oriented Electrodes Q ¹ = Embossed 5" Reel - Vertically Oriented Electrodes G ¹ = Embossed 7" Reel - Horizontally Oriented Electrodes P ¹ = Embossed 7" Reel - Vertically Oriented Electrodes Tape specifications conform to EIA RS481	QUALIFICATION AEC-Q200 qualification ³ (optional)		
Part Number written: 252S48E470KV4E								
						MARKING 3 = Cap Code & Tolerance 4 = No Marking 6 = EIA Code (Marking option is only available on 0805 and larger case sizes)		

¹ - Not available for all MLCC - Call factory for info.

² - WVDC - Working Voltage DC.

³ -Qualification required for automotive application, Not available for all series - Call factory for info.

LOW ESR / HIGH-Q CAPACITOR SELECTION CHART

EIA Size Cap. Value		RF Power Applications																			
		0201 (R05)		0402	0603	0805	0805	1111	2525	3838											
		NPO (R05L)	NPO (R05G)	(R07S)	(R14S)	(R15S)	(R15G)	(S42E)	(S48E)	(S58E)											
Capacitance pF	Code																				
0.1	0R1																				
0.2	0R2	25/50 V	25 V	50/250 V	250 V				500V	1500V											
0.3	0R3	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V												
0.4	0R4	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V												
0.5	0R5	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V											
0.6	0R6	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
0.7	0R7	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
0.8	0R8	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
0.9	0R9	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.0	1R0	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.1	1R1	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.2	1R2	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.3	1R3	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.4	1R4	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.5	1R5	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.6	1R6	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.7	1R7	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.8	1R8	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
1.9	1R9	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
2.0	2R0	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
2.1	2R1	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
2.2	2R2	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
2.4	2R4	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
2.7	2R7	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
3.0	3R0	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
3.3	3R3	25/50 V	25 V	50/250 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
3.6	3R6	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
3.9	3R9	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
4.3	4R3	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
4.7	4R7	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
5.1	5R1	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
5.6	5R6	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
6.2	6R2	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
6.8	6R8	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
7.5	7R5	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
8.2	8R2	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
9.1	9R1	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
10	100	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
11	110	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
12	120	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
13	130	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
15	150	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
16	160	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
18	180	25/50 V	25 V	50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
20	200	25/50 V		50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
22	220	25/50 V		50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
24	240	25/50 V		50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
27	270	25/50 V		50/200 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
30	300	25/50 V		50 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									
33	330	25/50 V		50 V	250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V									

Consult factory for Non-Standard values.

**A tolerance only available for R07S (0402) and R14S(0603) caps

LOW ESR / HIGH-Q CAPACITOR SELECTION CHART

EIA Size Cap. Value			RF Power Applications											
			0201 (R05)		0402	0603	0805	0805	1111	2525	3838			
			NPO (R05L)	NPO (R05G)	(R07S)	(R14S)	(R15S)	(R15G)	(S42E)	(S48E)	(S58E)			
Capacitance pF	Code	Tolerance												
36	360	F	25/50 V			250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V	
39	390		25/50 V			250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V	
43	430		25/50 V			250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V	
47	470		25/50 V			250 V	250 V	1000V	500V	1500V	2500V	3600V	7200V	
51	510		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
56	560		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
62	620		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
68	680		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
75	750		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
82	820		25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V	
91	910	25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V		
100	101	25/50 V			250 V	250 V	500V	500V	1500V	2500V	3600V	7200V		
110	111	G				250 V		300V	1500V	2500V	3600V	7200V		
120	121						250 V		300V	1000V	2500V	3600V	7200V	
130	131						250 V		300V	1000V	2500V	3600V	7200V	
150	151						250 V		300V	1000V	2500V	3600V	7200V	
160	161						250 V		300V	1000V	2500V	3600V	7200V	
180	181						250 V		300V	1000V	2500V	3600V	7200V	
200	201						250 V		300V	1000V	2500V	3600V		
220	221						250 V		200V	1000V	2500V	3600V		
240	241								200V	600V	2500V	3600V		
270	271								200V	600V	2500V	3600V		
300	301	J						200V	600V	1500V	3600V			
330	331								200V	600V	1500V	3600V		
360	361								200V	600V	1500V	3600V		
390	391								200V	600V	1500V	3600V		
430	431		K						200V	500V	1500V	2500V		
470	471									200V	500V	1500V	2500V	
510	511									200V	500V	1000V	2500V	
560	561									200V	500V	1000V	2500V	
620	621									200V	500V	1000V	2500V	
680	681									200V		1000V	2500V	
750	751								200V		1000V	2500V		
820	821	G							200V		1000V	2500V		
910	911									200V		1000V	1000V	
1000	102									200V		1000V	1000V	
1200	122										1000V	1000V		
1500	152										500V	1000V		
1800	182										500V	1000V		
2200	222										300V	1000V		
2700	272										300V	500V		
3300	332											500V		
3900	392											500V		
4700	472										500V			
5100	512										500V			
10000	103													

Consult factory for Non-Standard values.

DIELECTRIC CHARACTERISTICS

NPO

TEMPERATURE COEFFICIENT:	0 ± 30ppm /°C, -55 to 150°C	
QUALITY FACTOR / DF:	Q >1,000 @ 1KHz (C>1,000pF), Typical 10,000 (C<1,000 pF)	
INSULATION RESISTANCE:	>100 GΩ @ 25°C, WVDC ¹ ; 125°C IR is 10% of 25°C rating	
DIELECTRIC STRENGTH:	500 V ≤ 2.5 X WVDC ¹ Min., 25°C, 50 mA max 1000 V ≤ 1.5 X WVDC ¹ Min., 25°C, 50 mA max > 1500 = 1 X WVDC ¹ Min., 25°C, 50 mA max	
TEST PARAMETERS::	1MHz ±50kHz, 1.0±0.2 VRMS, 25°C	
AVAILABLE CAPACITANCE:		
Size 0201:	0.2 - 100 pF	Size 1111: 0.2 - 1000 pF
Size 0402:	0.2 - 33 pF	Size 2525: 1.0 - 2700 pF
Size 0603:	0.2 - 100 pF	Size 3838: 1.0 - 5100 pF
Size 0805:	0.3 - 220 pF	

MECHANICAL & ENVIRONMENTAL CHARACTERISTICS

	SPECIFICATION	TEST PARAMETERS
SOLDERABILITY:	Solder coverage ≥ 90% of metalized areas No termination degradation	Preheat chip to 120°-150°C for 60 sec., dip terminals in rosin flux then dip in Sn62 solder @ 240°±5°C for 5±1 sec
RESISTANCE TO SOLDERING HEAT:	No mechanical damage Capacitance change: ±2.5% or 0.25pF Q>500 I.R. >10 G Ohms DWV ² : 2.5 x WVDC ¹	Preheat device to 80°-100°C for 60 sec. followed by 150°-180°C for 60 sec. Dip in 260°±5°C solder for 10±1 sec. Measure after 24±2 hour cooling period
TERMINAL ADHESION:	Termination should not pull off. Ceramic should remain undamaged.	Linear pull force ³ exerted on axial leads soldered to each terminal.
PCB DEFLECTION:	No mechanical damage. Capacitance change: 5% or 0.5pF whichever is greater.	Glass epoxy PCB: 2 mm deflection
LIFE TEST:	MIL-STD-202, Method 108I No mechanical damage Capacitance change: ±3.0% or 0.3 pF Q>500 I.R. >1 G Ohms DWV ² : 2.5 x WVDC ¹	Applied voltage: 200% of WVDC ¹ for capacitors rated at 500 volts DC or less. 100% of WVDC ¹ for capacitors rated at 1250 volts DC or less. Temperature: 125°±3°C Test time: 1000+48-0 hours
THERMAL CYCLE:	No mechanical damage. Capacitance change: ±2.5% or 0.25pF Q>2000 I.R. >10 G Ohms DWV ² : 2.5 x WVDC ¹	5 cycles of: 30±3 minutes @ -55°+0/-3°C, 2-3 min. @ 25°C, 30±3 min. @ +125°+3/-0°C, 2-3 min. @ 25°C Measure after 24±2 hour cooling period
HUMIDITY, STEADY STATE:	No mechanical damage. Capacitance change: ±5.0% or 0.50pF max. Q>300 I.R. ≥ 1 G-Ohm DWV ² : 2.5 x WVDC ¹	Relative humidity: 90-95% Temperature: 40°±2°C Test time: 500 +12/-0 Hours Measure after 24±2 hour cooling period
HUMIDITY, LOW VOLTAGE:	No mechanical damage. Capacitance change: ±5.0% or 0.50pF max. Q>300 I.R. = 1 G-Ohm min. DWV ² : 2.5 x WVDC ¹	Applied voltage: 1.5 VDC, 50 mA max. Relative humidity: 85±2% Temperature: 40°±2°C Test time: 240 +12/-0 Hours Measure after 24±2 hour cooling period
VIBRATION:	No mechanical damage. Capacitance change: ±2.5% or 0.25pF Q>1000 I.R. ≥ 10 G-Ohm DWV ² : 2.5 x WVDC ¹	Cycle performed for 2 hours in each of three perpendicular directions Frequency range 10Hz to 55 Hz to 10 Hz traversed in 1 minute. Harmonic motion amplitude: 1.5mm

¹ - WVDC - Working Voltage DC.

² - DWV - Dielectric Withstanding Voltage.

³ - 0402 ≥ 2.0lbs, 0603 ≥ 4.0lbs (min).

⁴ - Whichever is less.

AEC-Q200: Qualification required for automotive application - Not available for all series - Call factory for info.




MECHANICAL CHARACTERISTICS


Size	Units	Length	Width	Thickness	End Band
EIA 0201	In	.024 ±.001	.012 ±.001	.012 ±.001	.008 Max.
Metric (0603)	mm	(0.60 ±0.03)	(0.30 ±0.03)	(0.30 ±0.03)	(0.20 Max.)
EIA 0402	In	.040 ±.004	.020 ±.004	.020 ±.004	.010 ±.006
Metric (1005)	mm	(1.02 ±0.1)	(0.51 ±0.1)	(0.51 ±0.1)	(0.25 ±.15)
EIA 0603	In	.062 ±.006	.032 ±.006	.030 +.005/-.003	.014 ±.006
Metric (1608)	mm	(1.57 ±0.15)	(0.81 ±0.15)	(0.76 +.13-.08)	(0.35 ±.15)
EIA 0805	In	.080 ±.008	.050 ±.008	.040 ±.006	.020 ±.010
Metric (2012)	mm	(2.03 ±0.20)	(1.27 ±0.20)	(1.02 ±.15)	(0.50 ±.25)

HORIZONTAL AND VERTICAL ORIENTED CAPACITORS

Horizontal Electrode Orientation

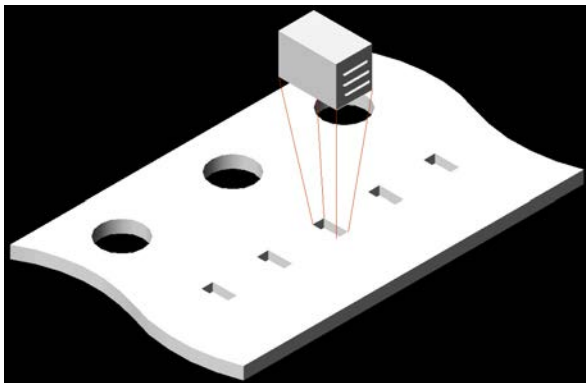

Vertical Electrode Orientation

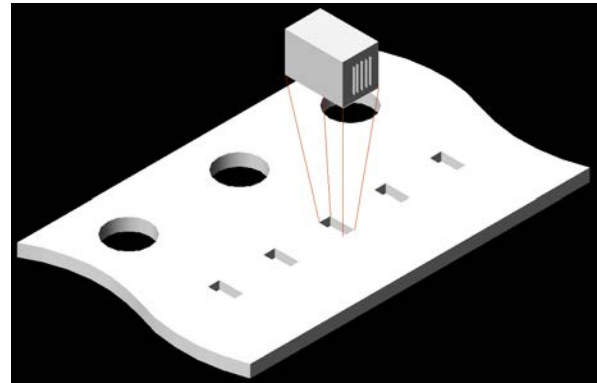

APPLICATIONS & FEATURES

Size:	EIA 0201, 0402
Performance:	SRF's up to 20 GHz, Ultra High Q, Tight tolerance, Ultralow ESR
Termination:	Ni/Au, Ni/Sn, Ni/SnPb
Applications:	High Frequency Wireless Communications, Portable Wireless Products, Battery Powered Products

RoHS Compliant

BENEFITS OF USING ORIENTED CAPACITORS

- Consistent Orientation - Improved repeatability of production circuits.
- Consistent Orientation - More consistent filter performance.
- Vertical Orientation - The elimination of parallel frequencies.
- Vertical Orientation - Lower inductance for a given capacitor.
- Horizontal Orientation - Lower coupling between adjacent capacitors.

E-SERIES TERMINATIONS AND LEADS


CHIP DIMENSIONS

Termination	Size	Units	L	Tol	W	Tol	T	E / B	Tol
V, T U, C	S42E	In	0.110	+0.020 -0.010	0.110	+/- .015	0.102 Max.	0.015 Typ.	+/- 0.008
		mm	2.79	+0.51 -0.25	2.79	+/- 0.38	2.59 Max.	0.38 Typ.	+/- 0.20
	S48E	In	0.230	+0.025 -0.010	0.250	+/- .015	0.150 Max.	0.025 Typ.	
		mm	5.84	+0.63 -0.25	6.35	+/- 0.38	3.81 Max.	0.63 Typ.	
	S58E	In	0.380	+0.015 -0.010	0.380	+/- .010	0.170 Max.	0.025 Typ.	
		mm	9.65	+0.38 -0.25	9.65	+/- 0.25	4.32 Max.	0.63 Typ.	

For all E-Series Models:

OPERATING TEMP. : -55 to +125°C
 INSULATION RESISTANCE: >10G Ω @ 25°C
 TEMPERATURE COEFFICIENT: 0 ± 30ppm /°C, -55 to 125°C
 DISSIPATION FACTOR (TYP): < 0.05% @ 1 MHz

Drawings not to scale

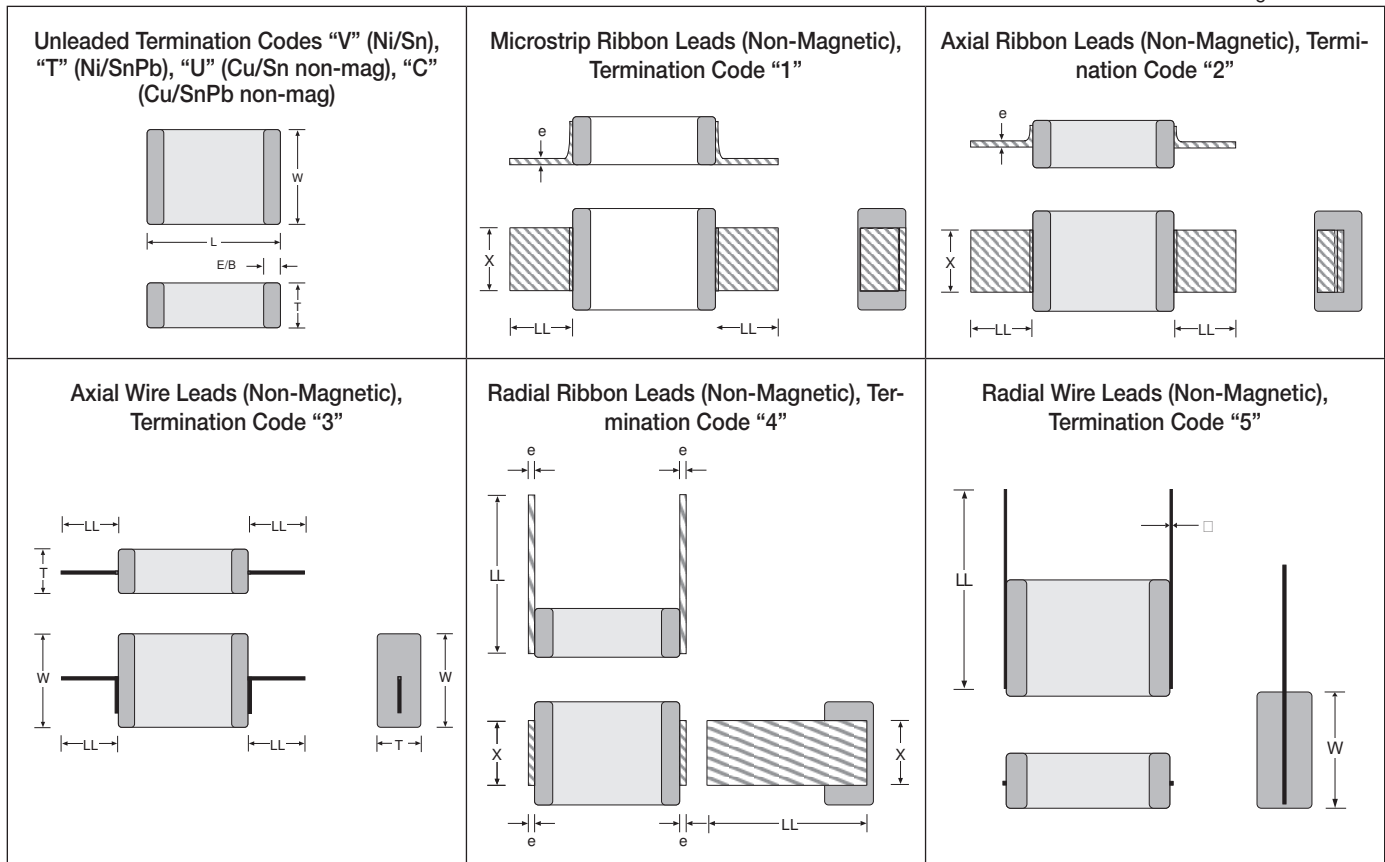


Lead	Size	LL(min)	X	Tol	e	e-Tol
1	S42E	0.25	0.093	+/-0.005	0.004	+/- 0.002
		6.40	2.36	+/- 0.13	0.102	+/- 0.051
	S48E	0.394	0.217	+/- 0.02	0.009	- 0.0019/+ 0.0031
		10.0	5.5	+/- 0.50	0.220	- 0.050/+ 0.080
	S58E	0.748	0.35	+/- 0.02	0.010	- 0.0019/+ 0.0039
		19.00	8.90	+/- 0.50	0.250	- 0.050/+ 0.100
2	S42E	0.25	0.093	+/-0.005	0.004	+/- 0.002
		6.40	2.36	+/- 0.13	0.102	+/- 0.051
	S48E	0.394	0.217	+/- 0.02	0.009	- 0.0019/+ 0.0031
		10.00	5.50	+/- 0.50	0.220	- 0.050/+ 0.080
	S58E	0.748	0.35	+/- 0.02	0.010	- 0.0019/+ 0.0039
		19.00	8.90	+/- 0.50	0.25	- 0.050/+ 0.100
3	S42E	0.25	0.020in (0.511) diameter wire			
		6.40				
	S48E	0.394				
		10.00				
S58E	0.748					
	19.00					

Lead	Size	LL(min)	X	Tol	e	e-Tol
4	S42E	0.352	0.093	+/-0.005	0.004	+/- 0.002
		8.90	2.36	+/- 0.13	0.102	+/- 0.051
	S48E	0.501	0.217	+/- 0.02	0.009	- 0.0019/+ 0.0031
		12.70	5.50	+/- 0.50	0.220	- 0.050/+ 0.080
	S58E	0.886	0.35	+/- 0.02	0.010	- 0.0019/+ 0.0039
		22.50	8.90	+/- 0.50	0.25	- 0.050/+ 0.100
5	S42E	0.25	0.020in (0.511) diameter wire			
		6.40				
	S48E	0.394				
		10.00				
S58E	0.748					
	19.00					


RF CHARACTERISTICS - R05L SERIES

Resonant Frequency : 0201/R05L

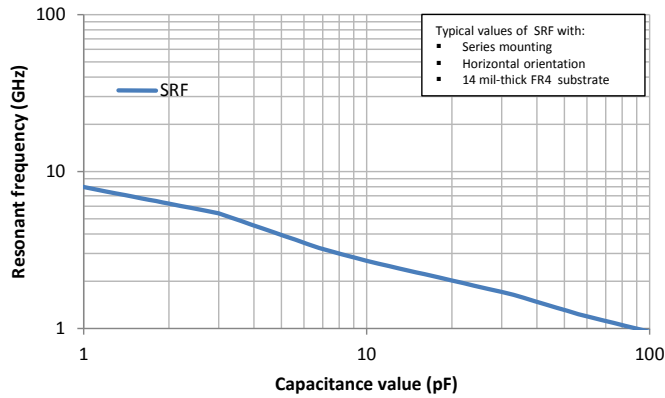


The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.


0201 R05L Q factor

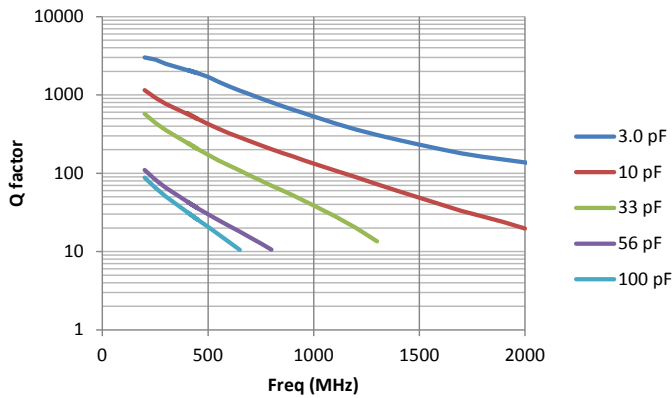

0201 R05L Equivalent Series Resistance (ESR)

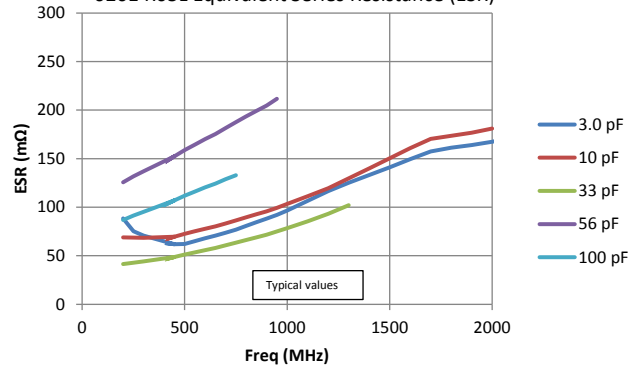


0201 R05L Max Current

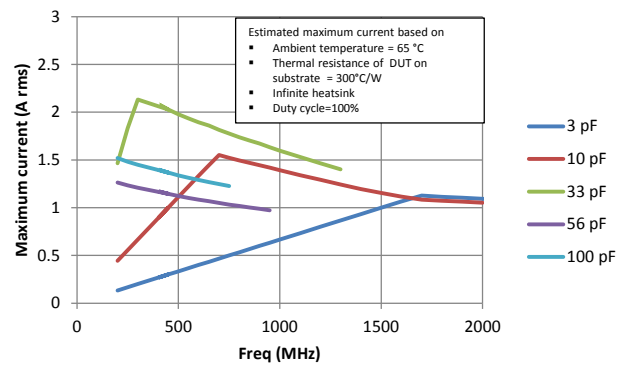


RF CHARACTERISTICS - R07S-SERIES

0402 R07S Series Resonant frequency


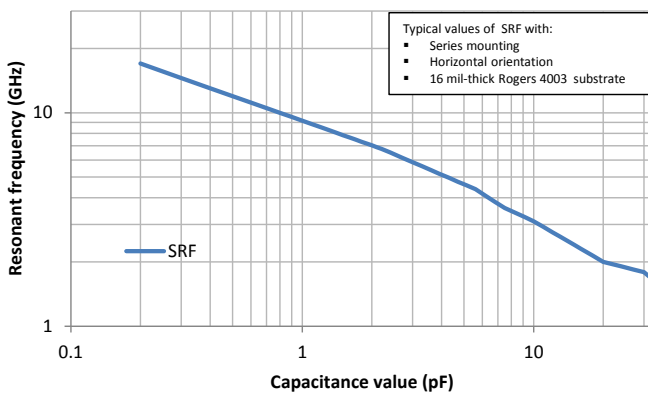


The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.



0402 R07S Equivalent Series Resistance (ESR)

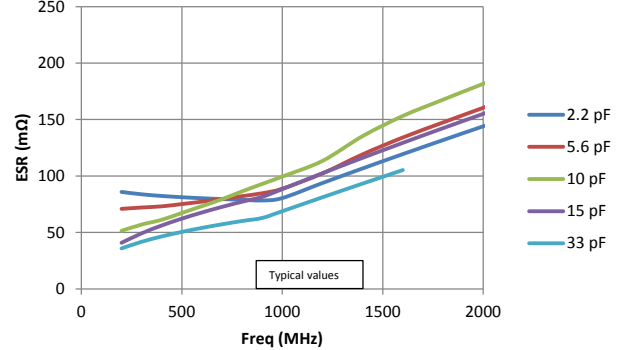



RF CHARACTERISTICS R07S SERIES

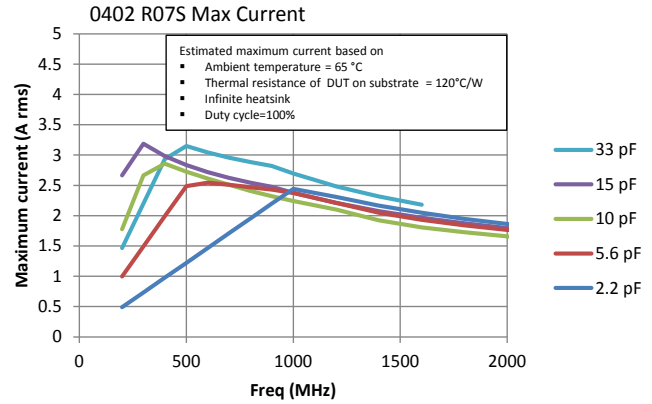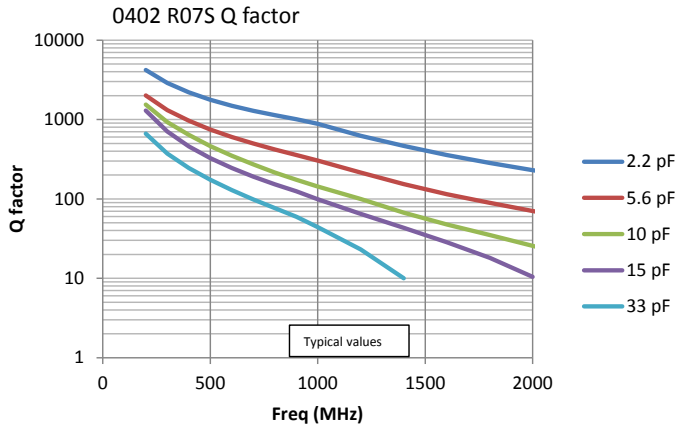


RF CHARACTERISTICS R14S SERIES




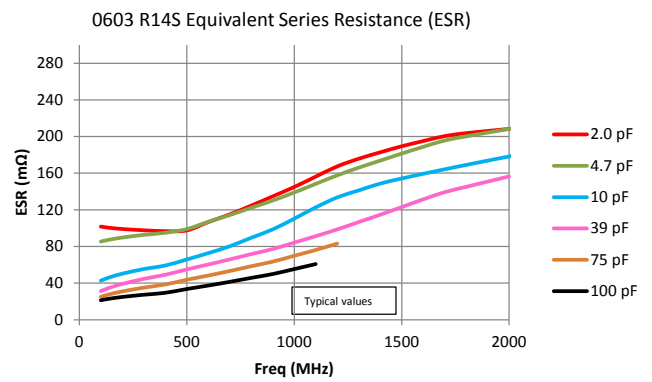
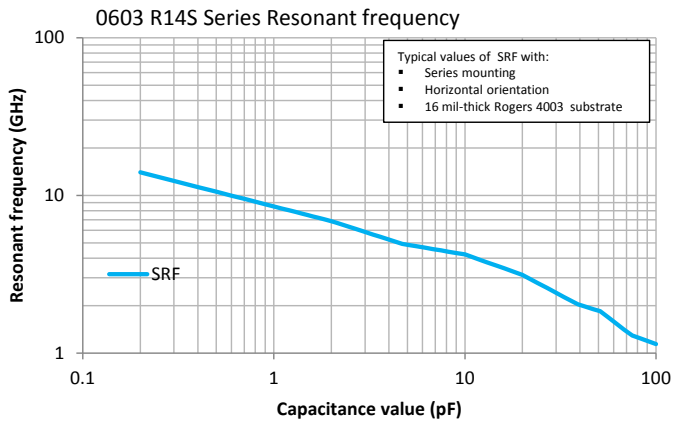


The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.

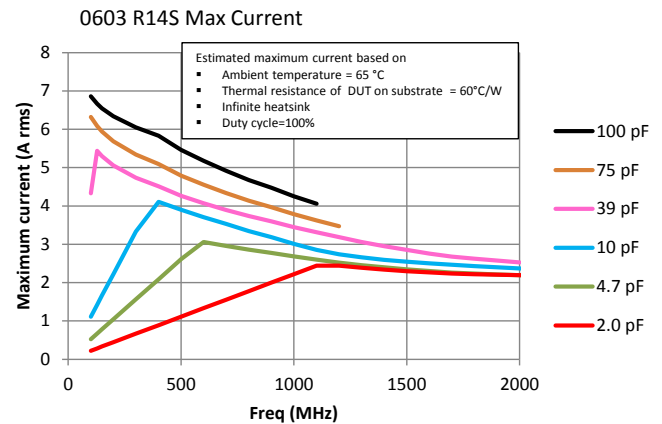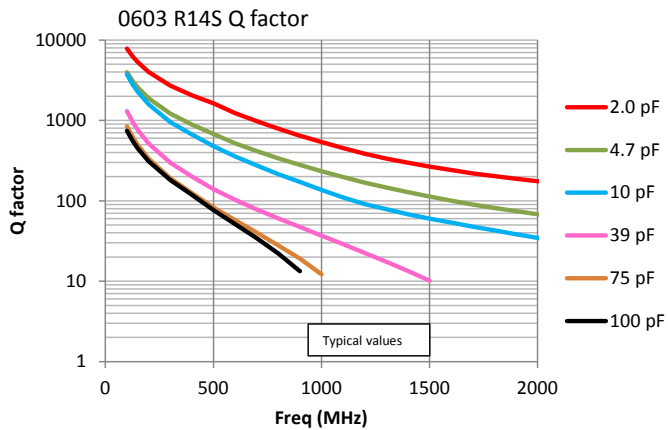


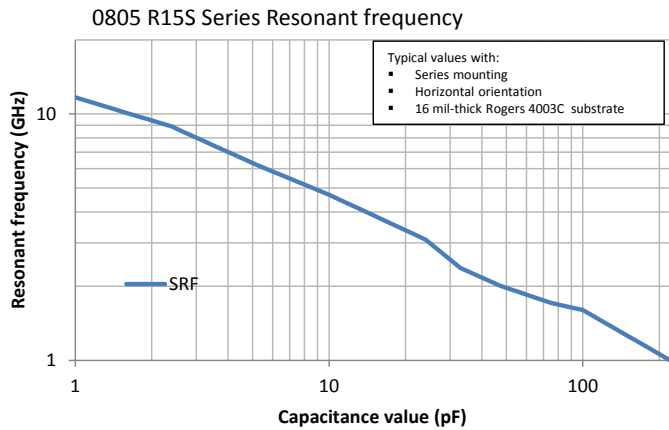






The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.

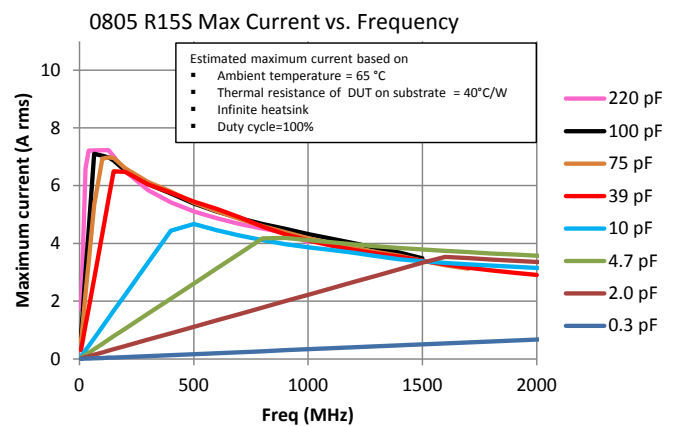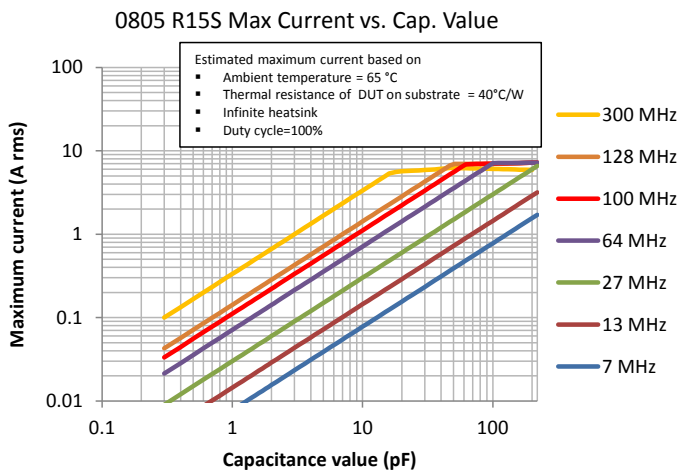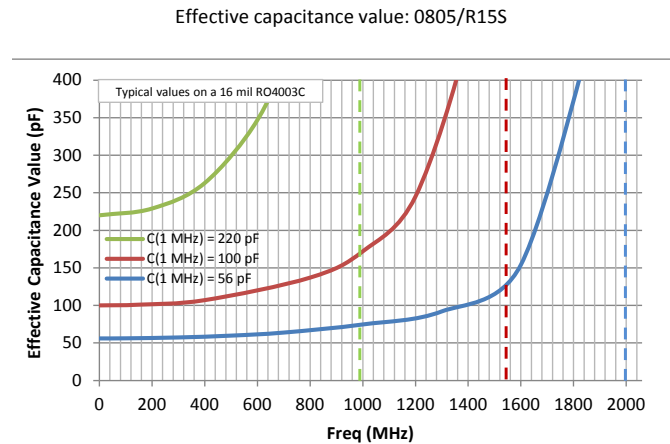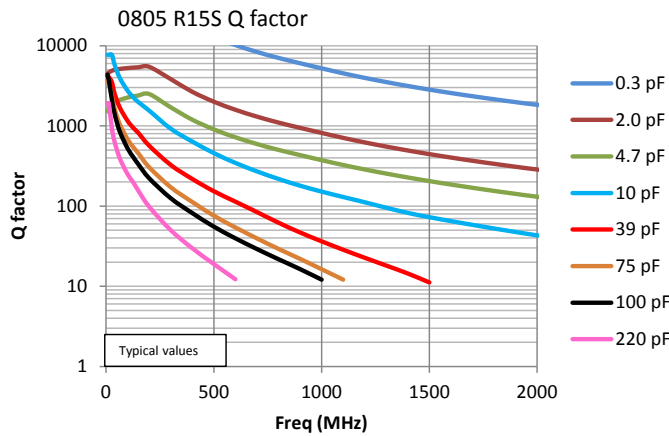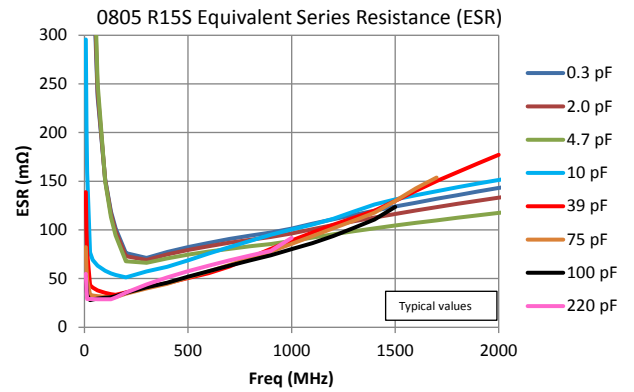


RF CHARACTERISTICS - S24E SERIES

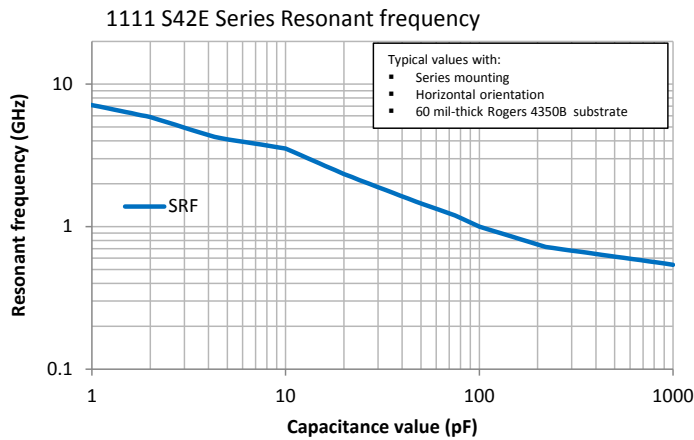




The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.

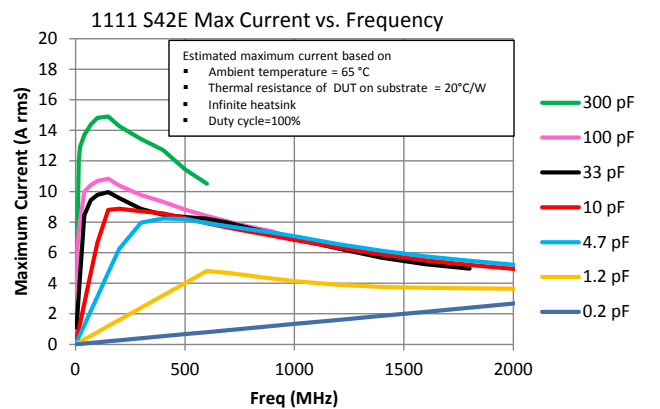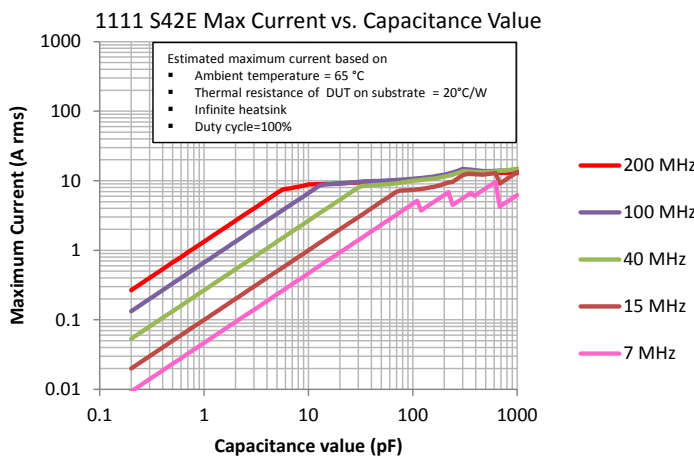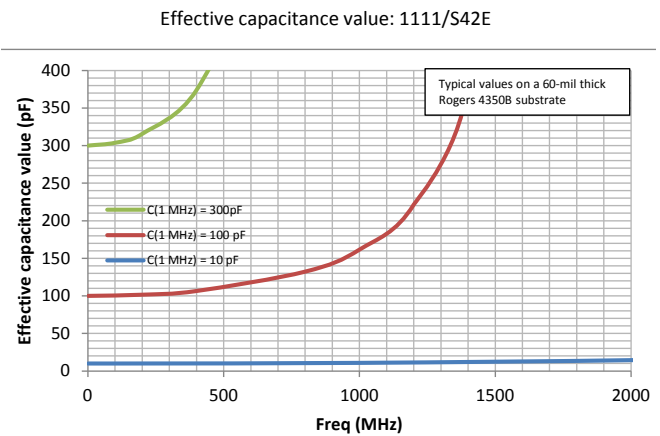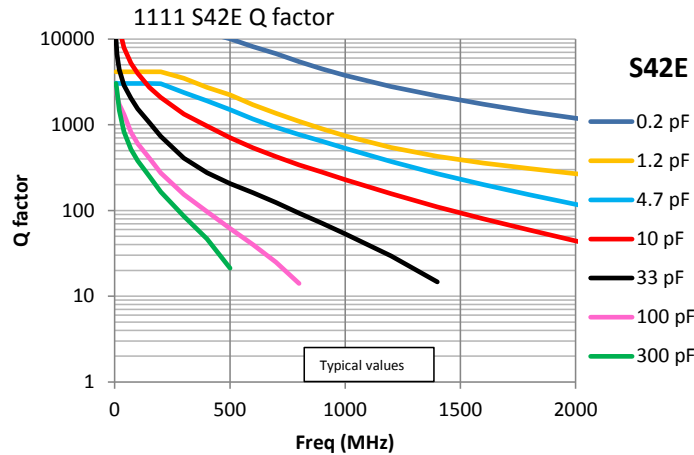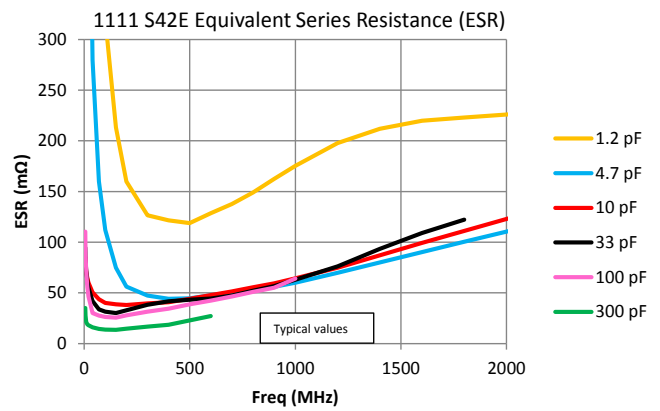


RF CHARACTERISTICS - S48E SERIES

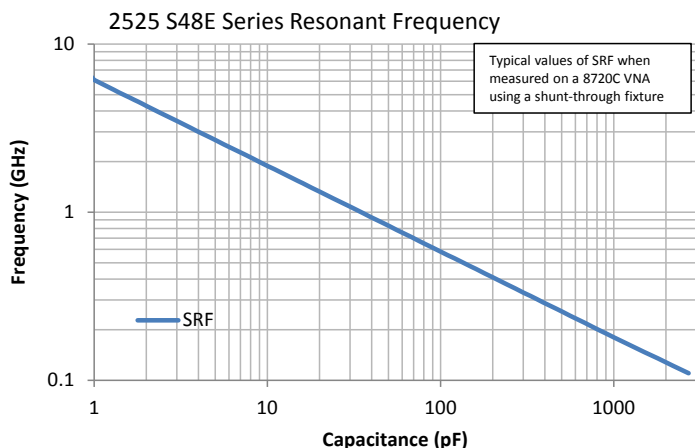

The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.

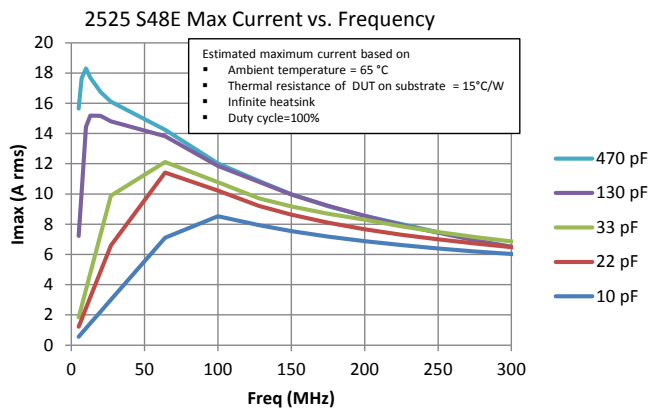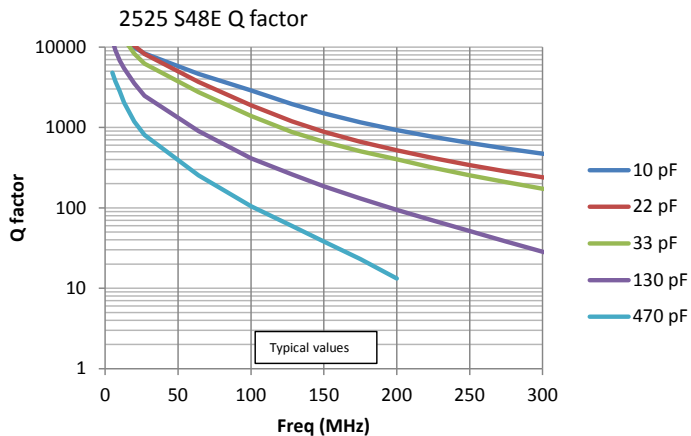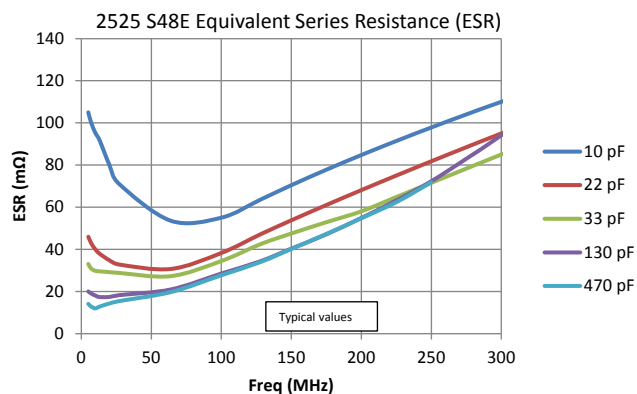

RF CHARACTERISTICS - S58E SERIES

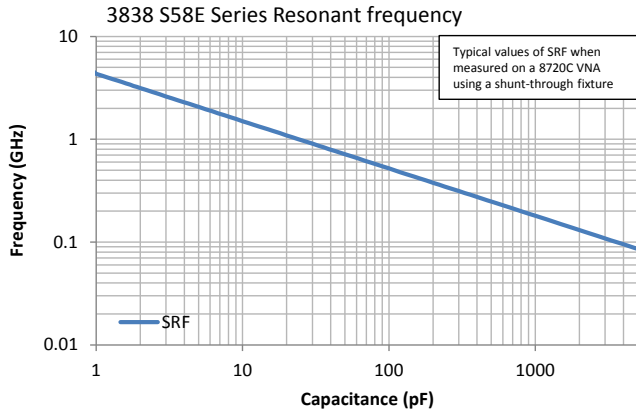

The Series Resonant Frequency is highly dependent on the substrate, pad dimensions, and measurement method. The above chart is for reference only.

