



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SMD Power Inductor 252010CDMC/DS




**Halogen
Free**

Dimension - [mm]

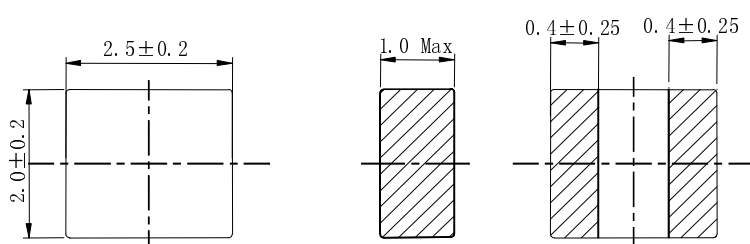

Land pattern and Schematics - [mm]

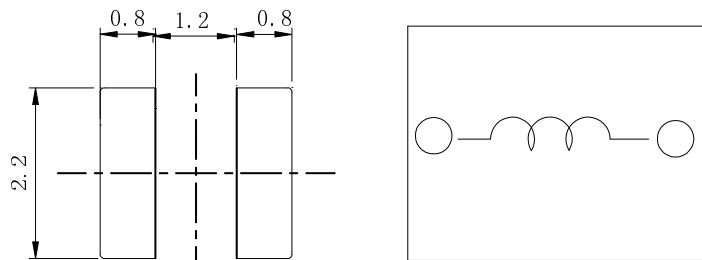

Description

- Magnetically shielded.
- L × W × H: 2.7 × 2.2 × 1.0 mm Max.
- Product weight: 30mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging.
- 7.1" diameter reel
- 3000pcs per reel

Applications

- Ideally used in smart phone, tablet PC, SSD USB3.0 and other low profile high current application.

Electrical Characteristics

Part No.	Inductance (μ H) [Within] ※1	D.C.R (m Ω) [within] at 25°C	Saturation Current (A) ※2 (Max.)	Temperature rise current [Typ.] (A) Thermocouple Method ※3
252010CDMCDS-R47MC	0.47 ± 20%	28 ± 20%	4.4	4.1
252010CDMCDS-1R0MC	1.0 ± 20%	50 ± 20%	3.2	3.0
252010CDMCDS-1R5MC	1.5 ± 20%	80 ± 20%	2.6	2.4
252010CDMCDS-2R2MC	2.2 ± 20%	103 ± 20%	2.4	2.2
252010CDMCDS-3R3MC	3.3 ± 20%	190 ± 20%	1.6	1.6
252010CDMCDS-4R7MC	4.7 ± 20%	240 ± 20%	1.4	1.4

※1. Inductance measuring condition: at 1MHz.

※2 Saturation current: The value of DC current when the inductance is over 70% of the initial value. (at 25°C)


※3 Temperature rise current: The actual value of DC current when the top surface temperature of test sample rise is $\Delta T = 40^\circ\text{C}$ ($T_a = 25^\circ\text{C}$).

SMD Power Inductor 252010CDMC/DS





Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

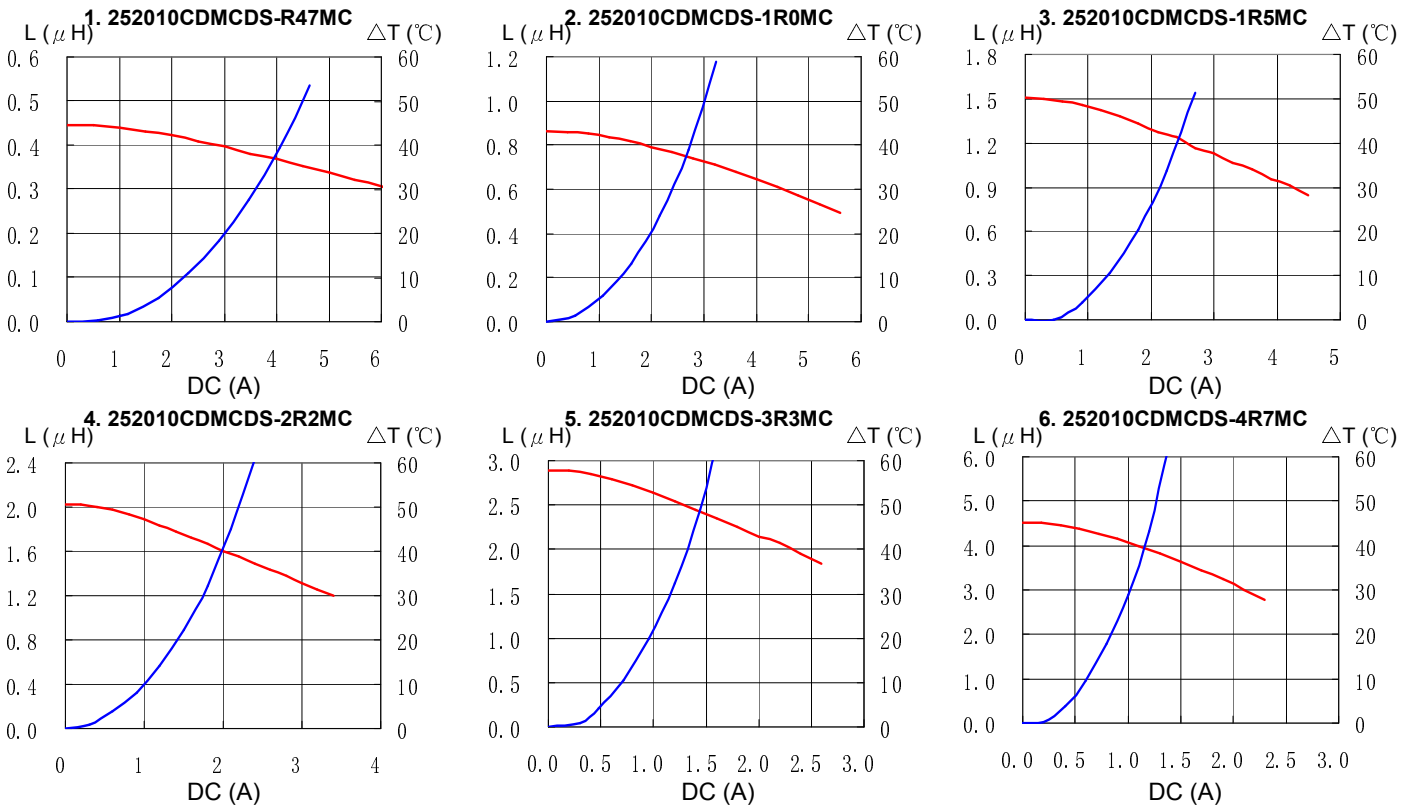

Solder Reflow Condition

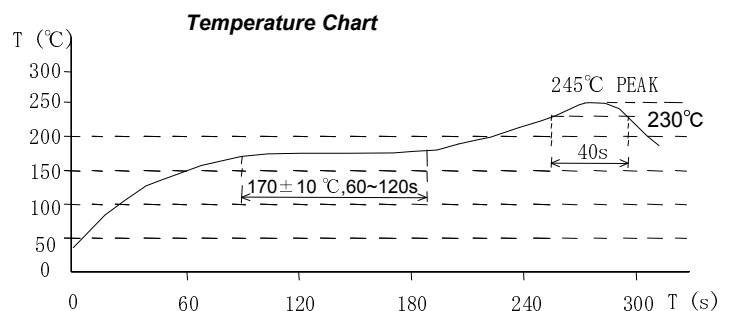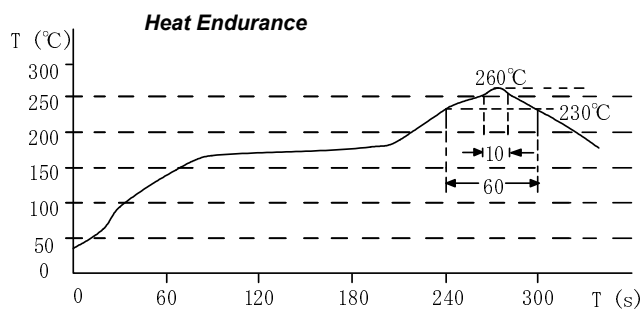

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com
Tokyo
Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com
Chicago
Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com
Seoul
Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com
Obernzell
Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen
Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com
Singapore
Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com
Neumarkt
Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei
Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com
San Jose
Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com