imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





3M[™] Fibrlok[™] II Universal Optical Fiber Splice 2529 Applications

- Single mode and multimode fibers
- Both construction and maintenance
- Aerial, buried, underground, pedestal
- Inside or outside buildings
- FTTx, Metro and Enterprise networks
- Up to 10 Gigabit data rates
- High density substitute for connectors

Features	Benefits
< 0.1 dB typical insertion loss	High performance
30 second installation time	Increased productivity
Minimum tooling requirements	Low capital cost
No epoxy or electricity required	Easy on-site installation
Simple, easy to use	Minimal training, lower installed cost
Ability to reposition fibers	Improved splicing yield
Single splice for any combination 250 µm or 900 µm fibers	Reduced inventory



3M[™] Fibrlok[™] II Universal Optical Fiber Splice 2529




3M[™] Fibrlok[™] Splice Kit with Cleaver 2559-C

Specifications

125 μm
250 or 900 μm
<0.1 dB
<-35 dB from -40° to 80° C (-40° to 176° F) <-60 dB typical at room temperature
4.4N (1.0 lb.) minimum; 13.2N (>3.0 lbs.) typical
Engineering thermoplastic with aluminum alloy element; UL 94, V-O rating
-40° to 80° C (-40° to 176° F)
Change in insertion loss <0.5 dB, -40° to 80° C (-40° to 176° F)
ASTM G-21-70; rating 0
IEC 61300-2-1 (EIA standard FOTP-11; test condition 1)
Seven days @ 43° C; change in insertion loss \leq 0.05 dB; 21,000 hours with <0.2 dB change
8,812 hours @ 85° C, 85% humidity with <0.2 dB change



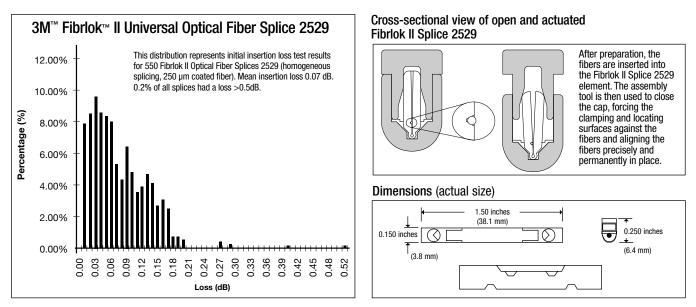

Ordering Information

To order, specify the correct product number from the chart below. For more information on the complete line of FibrlokTM Splicing products, contact your 3M sales representative.

Product Number	Product Description	3M ID	UPC	Packaging
2529	Fibrlok™ II Universal Optical Fiber Splice (250 x 900)	80-6107-5589-6	0-00-54007-92202-5	6/pkg 10 pkg/case
2529-K	Fibrlok™ II Universal Optical Fiber Splice Kit (250 x 900)	80-6107-5830-4	0-00-54007-92415-9	1 kit/case
2559	Fibrlok [™] Splice Kit	80-6113-2375-1	0-00-51115-29999-5	1 kit/case
2559-C	Fibrlok [™] Splice Kit with Cleaver	80-6113-2376-9	0-00-51115-30000-4	1 kit/case
2501	Fibrlok™ Assembly Tool	80-6105-8187-0	0-00-54007-57125-4	1/case
2506	Fibrlok™ II Cap-lifter Tool	80-6107-4784-4	0-00-54007-91619-2	25/pkg
2521-FL	Fibrlok [™] Splice Inserts	80-6108-5926-8	0-00-51138-36413-7	2/pkg 12 pkg/case
2521-FL-A	Fibrlok [™] Splice Inserts with adhesive back	80-6113-2604-4	0-00-51115-26046-9	24/case
2522	Fiber Splice Organizer Tray - Small	80-6108-5990-4	0-00-51138-36522-6	2/case
2523	Fiber Splice Organizer Tray - Large	80-6108-5991-2	0-00-51138-36523-3	2/case
2524	Fiber Splice Organizer Tray	80-6106-1688-2	0-00-51138-11514-2	3/case
2527	Fiber Splice Organizer Tray	80-6111-7558-1	0-00-51138-89008-7	2/case
2534	Fiber Cleaver	80-6113-2377-7	0-00-51115-30001-1	1/case

3M and Fibrlok are trademarks of 3M. All other trademarks used herein are the property of their respective owners.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.



Communication Markets Division 3M Telecommunications 6801 River Place Blvd. Austin, TX 78726-9000 800/426 8688 Fax 800/626 0329 www.3MTelecommunications.com

Please recycle. Printed in USA. © 3M 2010. All rights reserved. 80-6113-8313-6