



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# Fibrlok™ II Splice/Holder 2539


For 250µm and 900µm Tight Buffer Fibers

[Click Here for Instruction Manual](#)

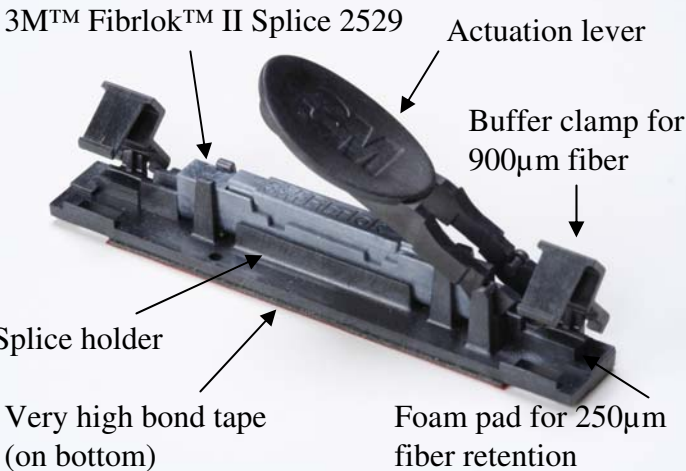

## Applications

- Inside or outside buildings
- Terminals
- Network interface devices (NIDs)
- Fiber distribution units
- Wall outlets

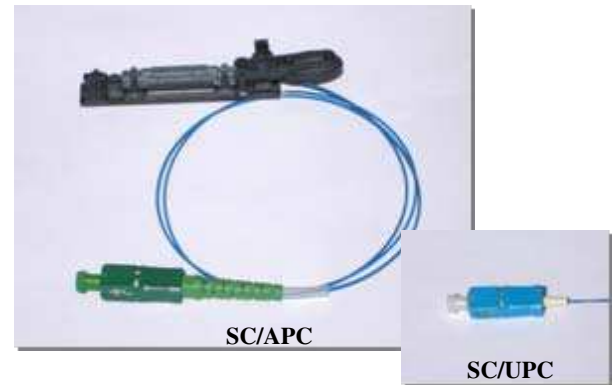

## Description

3M Fibrlok II splice/holder integrates the 3M Fibrlok II splice 2529, actuation tool, and holder all in one package. It enables fast, on-site installation without a separate assembly tool or splice tray. Designed for restoration of broken fiber and the final Fiber-to-the-Premise (FTTP) drop connection, it can be easily used with singlemode or multimode fibers with 250µm or 900µm tight buffer.\* Clamps on each side of the splice provide strain relief for the 900µm tight buffer for long-term stability and reliability. Very high bond tape on the bottom of the splice/holder permanently holds it at the splice location, which is especially useful at optical network terminals.

The Fibrlok II splice/holder is also available with a pre-terminated SC/APC or SC/UPC pigtail (0.75meters/ 30 inches) for easy installation. Pigtail is fabricated with 10mm radius, bend insensitive, zero water peak fiber.

Features	Benefits
Integrated splice, holder & actuator	No need for separate tray or actuation tool
Push button actuation	Easy splice operation
Buffer clamps	Provide 900µm fiber strain relief
Foam retention pad	Used for 250µm fiber splicing
Adhere with VHB tape	Flexible placement within terminal box
Preterminated SC pigtail	Only one fiber needs to be prepared

\* The 3M Fibrlok II Splice/Holder is designed for 900µm tight buffer and 250µm primary coated fiber. To splice 900µm loose tube, semi-tight, or release layered fiber remove the 900µm coating within the last four inches or more from the fiber end to be cleaved.




# 3M™ Fibrlok™ II Splice/Holder 2539

For 250µm and 900µm Tight Buffer Fibers

## Specifications

Dimensions	12.9mmW x 12.0mmH x 66mmL (0.5" x 0.5" x 2.6")
Fiber Diameter	125µm
Coating Diameter	250µm or 900µm Tight Buffer
Operating temperature	-40°C to 75°C (-40°F to 167°F)
Mean Insertion loss	< 0.1dB
Return loss	< -40dB Typical

Cross-sectional view of open and actuated 3M™ Fibrlok™ II Splice 2529

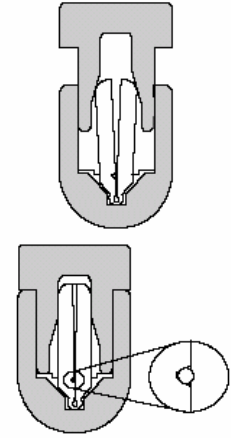

After preparation, the fibers are inserted into the Fibrlok II splice element. The actuation lever is then used to close the cap, forcing the clamping and locating surfaces against the fibers and aligning the fibers precisely and permanently in place.

## Description

2539 Fibrlok II Splice/Holder

## Packaging

60/package

2539 SC/APC Fibrlok II Splice/Holder with SC/APC Pigtail

12/package

2539 SC/UPC Fibrlok II Splice/Holder with SC/UPC Pigtail

12/package

3M and Fibrlok are trademarks of 3M Company.

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

## Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



Communication Markets Division  
3M Telecommunications

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329

www.3MTelecommunications.com

Please Recycle

© 3M 2006 80-6113-1566-6