imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Model 2631 Breakout: BNC (Female) To Minigator Test Clips

CE

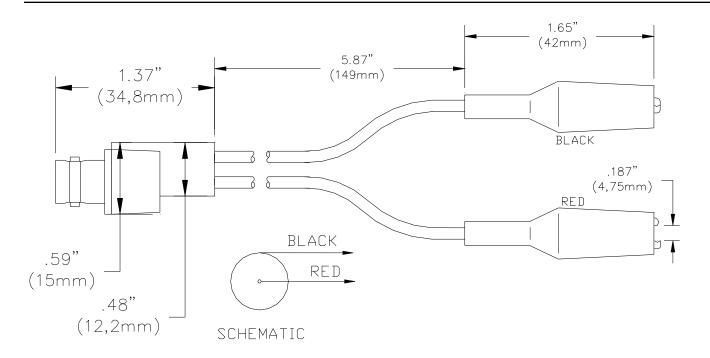

FEATURES:

- ✓ Converts BNC (male) cables / connectors to minigator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- Minigator clips attach to terminals up to .187" (4.75mm) diameter. \checkmark
- \checkmark Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE Wire: 20 AWG, PVC Insulated Minigators: Nickel plated steel, Spring: stainless steel Boot: Vinyl, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 45 VRMS Max. Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION: Model 2631*

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): $xx = \pm .02$ " (,51 mm), $xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

> Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com