



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# DS1307 Real Time Clock Breakout Board Kit

Created by Tyler Cooper

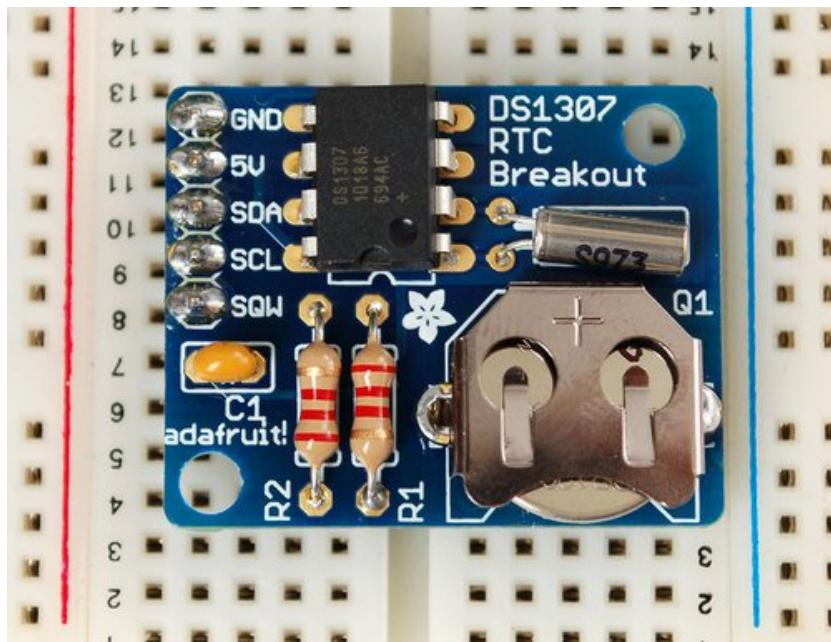


Last updated on 2016-09-07 12:03:17 AM UTC

# Guide Contents

Guide Contents	2
Overview	3
What is an RTC?	5
Battery Backup	6
CR1220 12mm Diameter - 3V Lithium Coin Cell Battery	6
Parts List	8
Assembly	10
Arduino Library	16
Talking to the RTC	16
Wiring It Up	17
Fun Plug-in Hack for Arduino UNO	18
Understanding the Code	20
First RTC Test	20
Setting the Time	21
Reading the Time	22
Downloads	24
Datasheets & Files	24
Schematic	24
Fabrication Print	24

# Overview

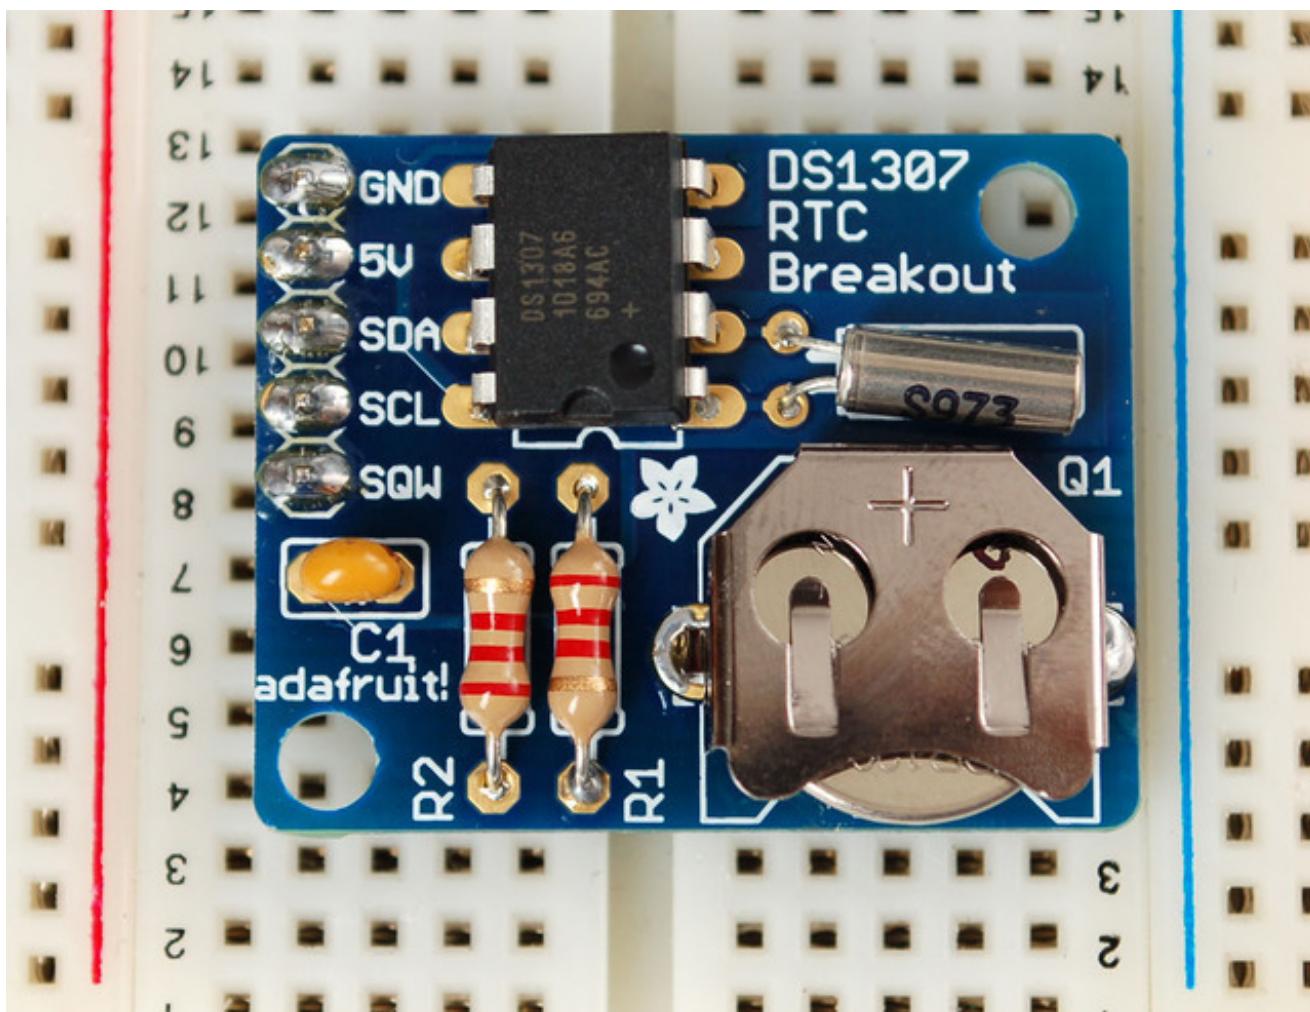

This is a great battery-backed real time clock (RTC) that allows your microcontroller project to keep track of time even if it is reprogrammed, or if the power is lost. Perfect for datalogging, clock-building, time stamping, timers and alarms, etc. The DS1307 is the most popular RTC, and works best with 5V-based chips such as the Arduino.

- All parts including PCB, header and battery are included
- Quick to assemble and use
- Plugs into any breadboard, or you can use wires
- We have example code and library for Arduino with a walkthrough on our documentation page
- Two mounting holes
- Will keep time for 5 years or more

This breakout board is a kit and requires some light soldering which should only take about

15 minutes.

# What is an RTC?

A real time clock is basically just like a watch - it runs on a battery and keeps time for you even when there is a power outage! Using an RTC, you can keep track of long timelines, even if you reprogram your microcontroller or disconnect it from USB or a power plug.

Most microcontrollers, including the Arduino, have a built-in timekeeper called **millis()** and there are also timers built into the chip that can keep track of longer time periods like minutes or days. So why would you want to have a separate RTC chip? Well, the biggest reason is that **millis()** only keeps track of time *since the Arduino was last powered-*. That means that when the power is turned on, the millisecond timer is set back to 0. The Arduino doesn't know that it's 'Tuesday' or 'March 8th', all it can tell is 'It's been 14,000 milliseconds since I was last turned on'.

OK so what if you wanted to set the time on the Arduino? You'd have to program in the date and time and you could have it count from that point on. But if it lost power, you'd have to reset the time. Much like very cheap alarm clocks: every time they lose power they blink **12:00**


While this sort of basic timekeeping is OK for some projects, some projects such as data-loggers, clocks, etc will need to have **consistent timekeeping that doesn't reset when the Arduino battery dies or is reprogrammed**. Thus, we include a separate RTC! The RTC chip is a specialized chip that just keeps track of time. It can count leap-years and knows how many days are in a month, but it doesn't take care of Daylight Savings Time (because it changes from place to place)



The image above shows a computer motherboard with a Real Time Clock called the

[DS1387](http://adafru.it/aX0) (<http://adafru.it/aX0>). There's a lithium battery in there which is why it's so big.

The RTC we'll be using is the [DS1307](http://adafru.it/con) (<http://adafru.it/con>). It's low cost, easy to solder, and can run for years on a very small coin cell.

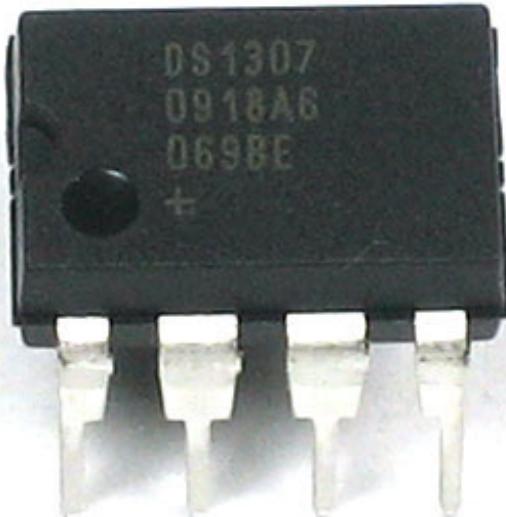

## Battery Backup

As long as it has a coin cell to run it, the RTC will merrily tick along for a long time, even when the Arduino loses power, or is reprogrammed.

Use any CR1220 3V lithium metal coin cell battery:



### CR1220 12mm Diameter - 3V Lithium Coin Cell Battery

PRODUCT ID: 380

These are the highest quality & capacity batteries, the same as shipped with the iCufflinks, iNecklace, Datalogging and GPS Shields, GPS HAT, etc. One battery per order...

<http://adafru.it/em8>

\$0.95

IN STOCK


You MUST have a coin cell installed for the RTC to work, if there is no coin cell, you should pull the battery pin low.

# Parts List

Image	Name	Description	Part Information	Quantity
	<b>IC2</b>	Real time clock chip	<a href="#">DS1307</a>	1
	<b>Q1</b>	32.768 KHz, 12.5 pF watch crystal	<a href="#">Generic</a> <a href="#">32.768KHz crystal</a>	1
	<b>R1,</b> <b>R2</b>	1/4W 5% 2.2K resistor Red, Red, Red, Gold	<a href="#">Generic</a>	2
	<b>C1</b>	0.1uF ceramic capacitor (104)	<a href="#">Generic</a>	1
		5 pin male header (1x5)	<a href="#">Generic</a>	1
	<b>BATT</b>	12mm 3V lithium coin cell <b>(As of October 15th, 2015, this product no longer</b>	<a href="#">CR1220</a>	1
		<b>comes with a coin cell battery - <u>though we recommend you purchase one!</u></b>		
	<b>BATT'</b>	12mm coin cell holder	<a href="#">Keystone 3001</a>	1




# Assembly

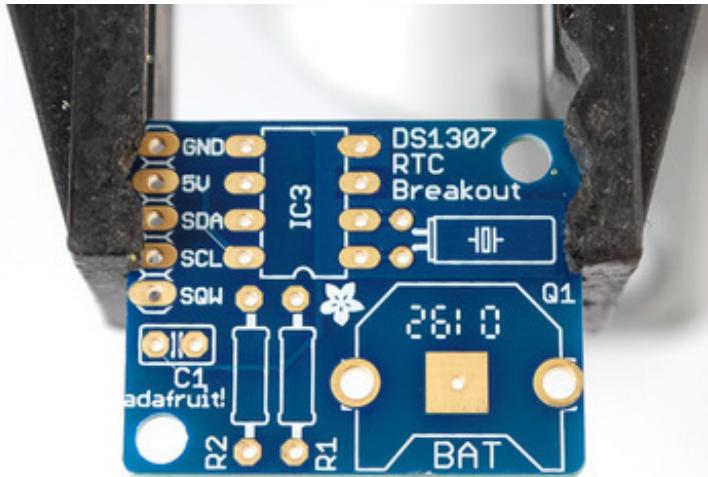


Prepare to assemble the kit by checking the parts list and verifying you have everything!

Next, heat up your soldering iron and clear off your desk.

Place the circuit board in a vise so that you can easily work on it.

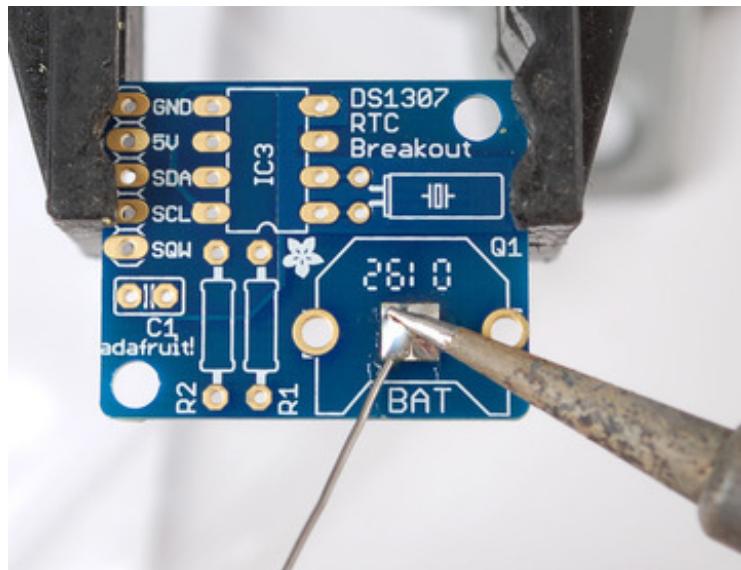


Begin by soldering a small bump onto the negative pad of the battery: this will make better contact!

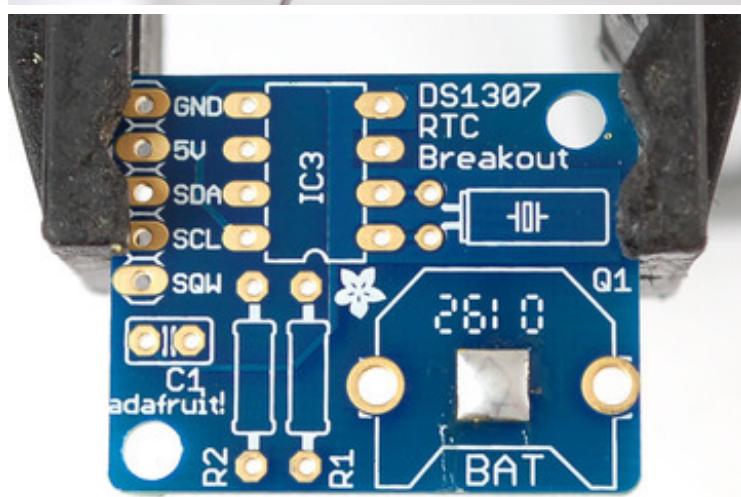



Place the two 2.2K resistors, and the ceramic capacitor. They are symmetric so no need to worry about direction. **If you're planning on using with a Raspberry Pi (which has 3.3V logic and built in pull-ups, skip the 2.2K resistors!)**


Then place the crystal (also symmetric), the battery holder

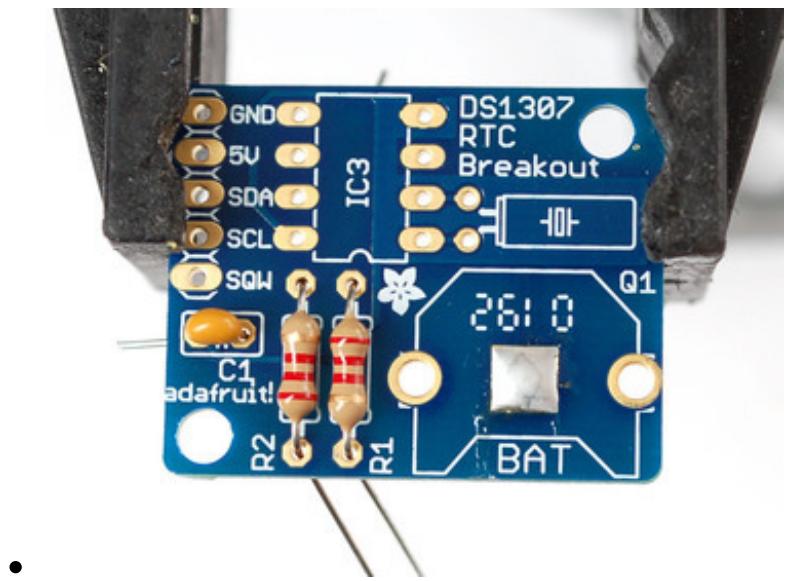

(goes on so that the battery can slip in the side) and the RTC chip.


The RTC chip must be placed so that the notch/dot on the end match the silkscreen. Look at the photo on the left, the notch is pointing down. Double check this before soldering in the chip because its quite hard to undo!

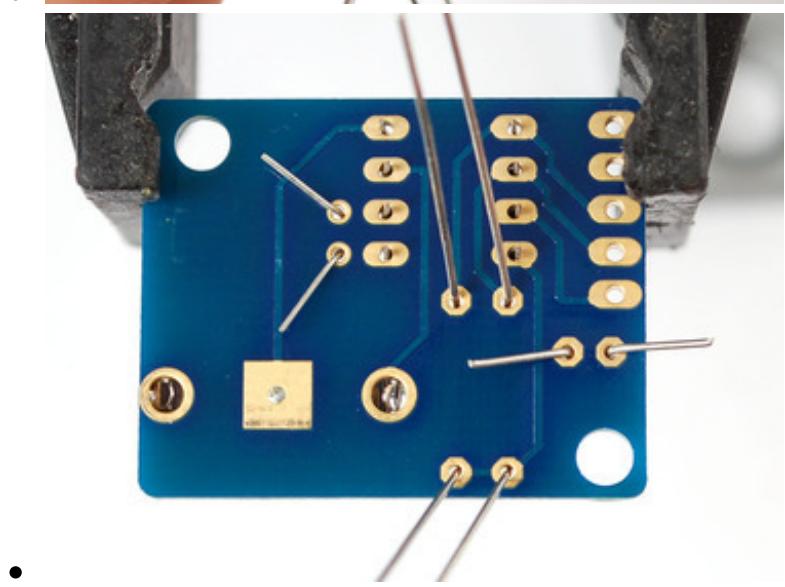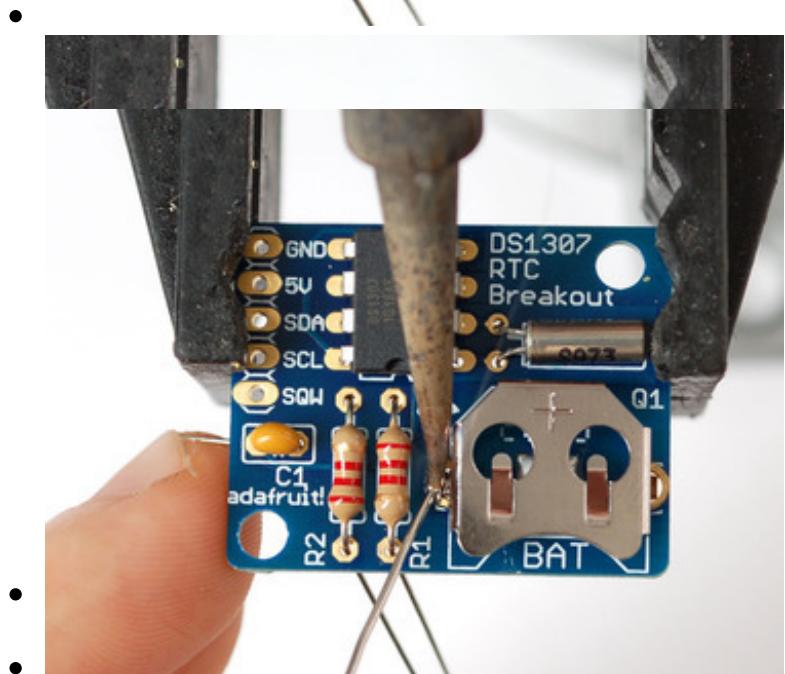


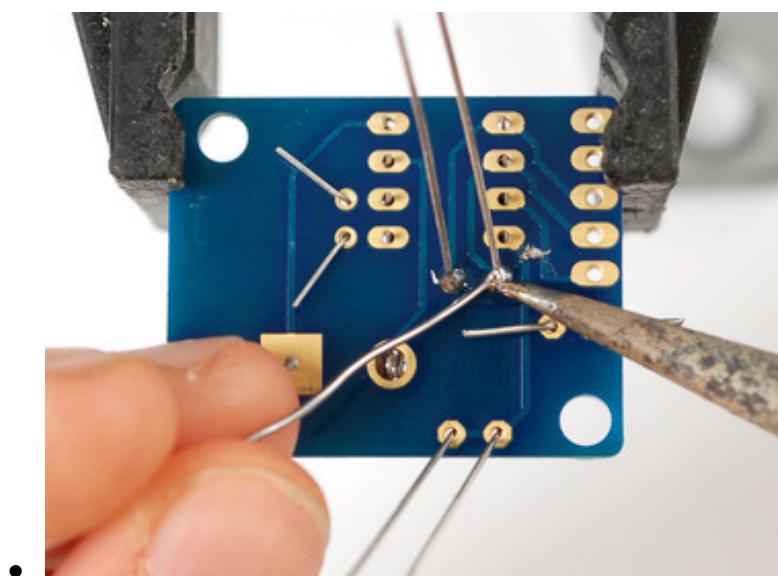


To keep the battery holder from falling out, you may want to 'tack' solder it from the top.

Then flip over the board and solder all the pins.

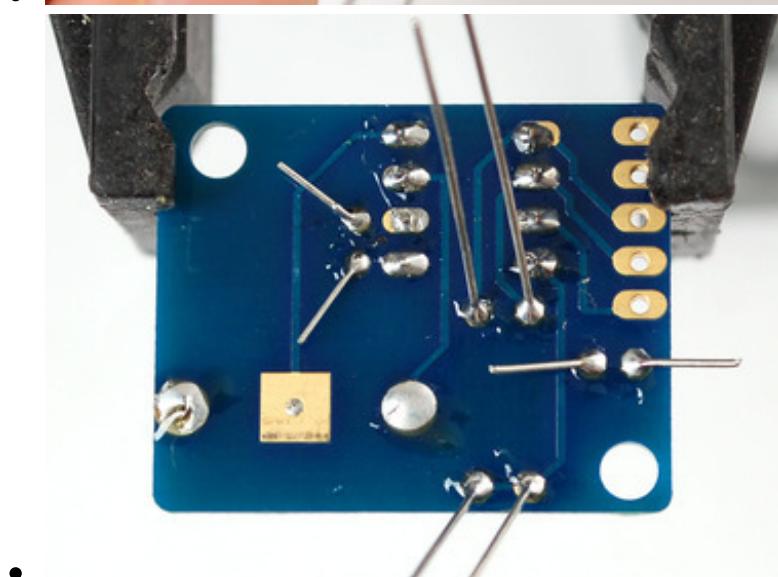


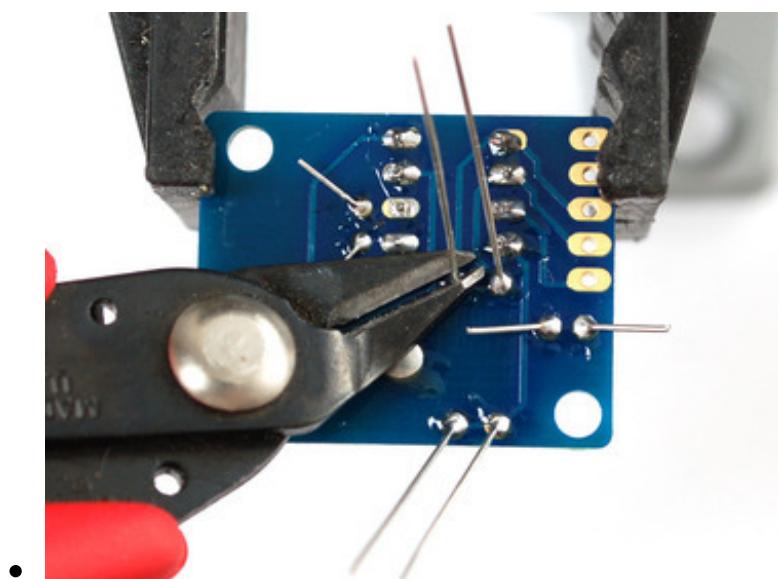


Clip the leads of the resistors, crystal and capacitor short.

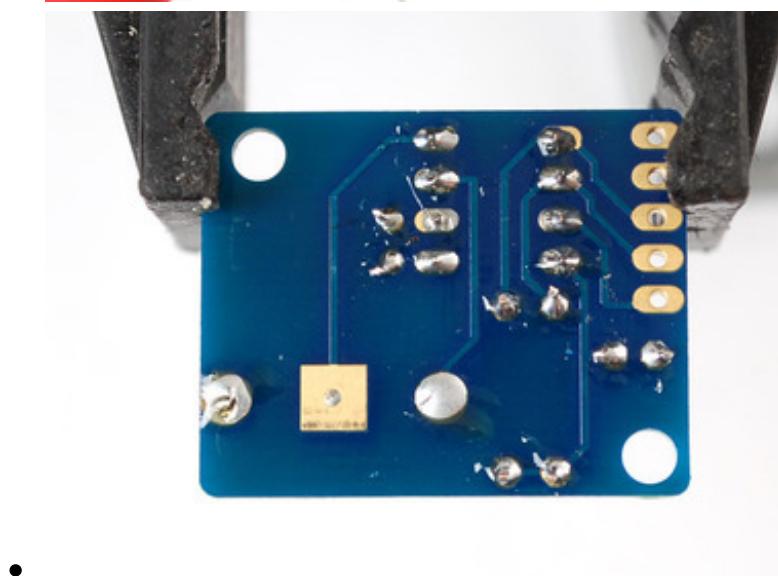

If you'd like to use the header to plug the breakout board into something, place the header in a breadboard, long side down and place the board so that the short pins stick thru the pads.

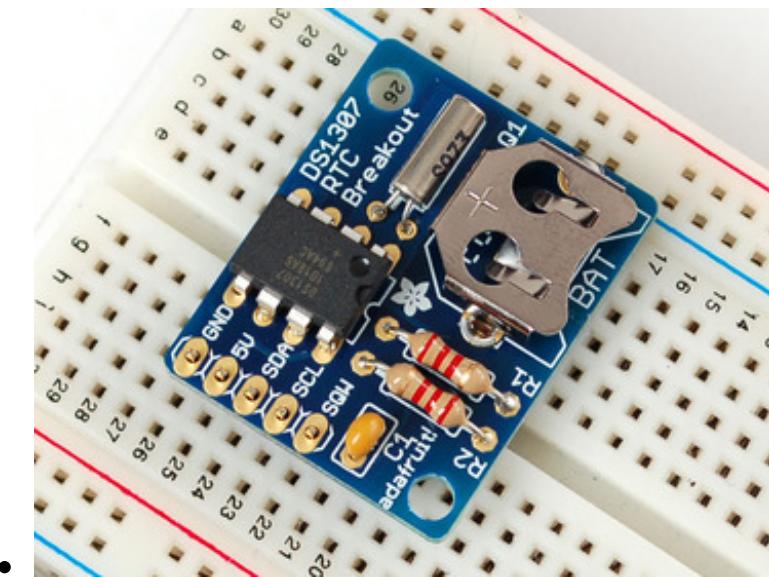

Solder them in place.

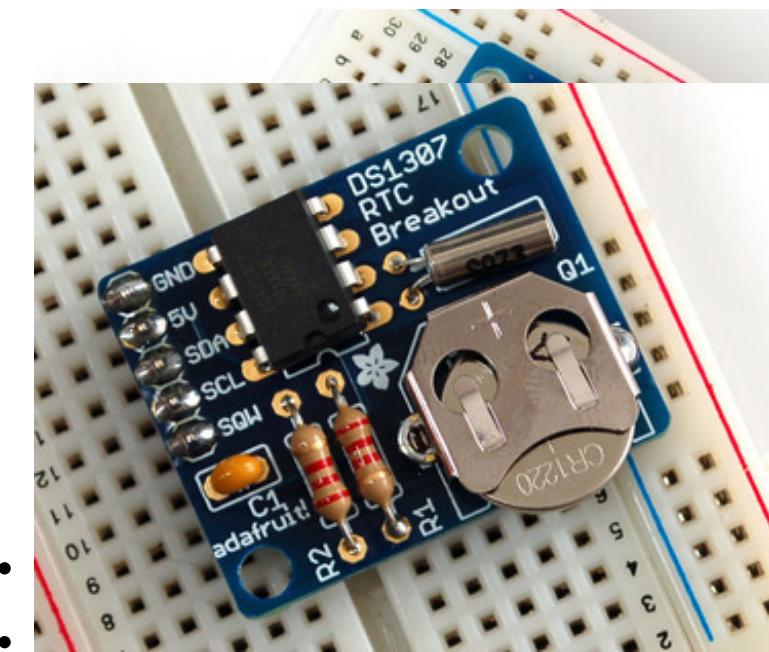

Insert the battery so that the flat + side is UP. *The battery will last for many years, 5 or more, so no need to ever remove or replace it.*

**You MUST have a coin cell installed for the RTC to work, if there is no coin cell, it will act strangely and possibly hang the Arduino so ALWAYS make SURE there's a battery installed, even if its a dead battery.**

# Arduino Library

## Talking to the RTC

The RTC is an i2c device, which means it uses 2 wires to communicate. These two wires are used to set the time and retrieve it. On the Arduino UNO, these pins are also wired to the **Analog 4** and **5** pins. This is a bit annoying since of course we want to have up to 6 analog inputs to read data and now we've lost two.

For the RTC library, we'll be using a fork of JeeLab's excellent RTC library, [which is available on GitHub](#) (<http://adafru.it/c7r>). You can do that by visiting the github repo and manually downloading or, easier, just click this button to download the zip

[Download RTCLib](#)

<http://adafru.it/cxm>

Rename the uncompressed folder **RTCLib** and check that the **RTCLib** folder contains **RTCLib.cpp** and **RTCLib.h**

Place the **RTCLib** library folder your **arduinosketchfolder/libraries/** folder.

You may need to create the**libraries** subfolder if it's your first library. Restart the IDE.

We also have a great tutorial on Arduino library installation at:

<http://learn.adafruit.com/adafruit-all-about-arduino-libraries-install-use>


Once done, restart the IDE

# Wiring It Up

There are only 5 pins: **5V GND SCL SDA SQW**.

- **5V** is used to power to the RTC chip when you want to query it for the time. If there is no 5V signal, the chip goes to sleep using the coin cell for backup.
- Connect **GND** to common power/data ground
- Connect the **SCL** pin to the I2C clock**SCL** pin on your Arduino. On an UNO & '328 based Arduino, this is also known as **A5**, on a Mega it is also known as**digital 21** and on a Leonardo/Micro, **digital 3**
- Connect the **SDA** pin to the I2C data**SDA** pin on your Arduino. On an UNO & '328 based Arduino, this is also known as **A4**, on a Mega it is also known as**digital 20** and on a Leonardo/Micro, **digital 2**

**SQW** is the optional square-wave output you can get from the RTC if you have configured it to do so. Most people don't need or use this pin

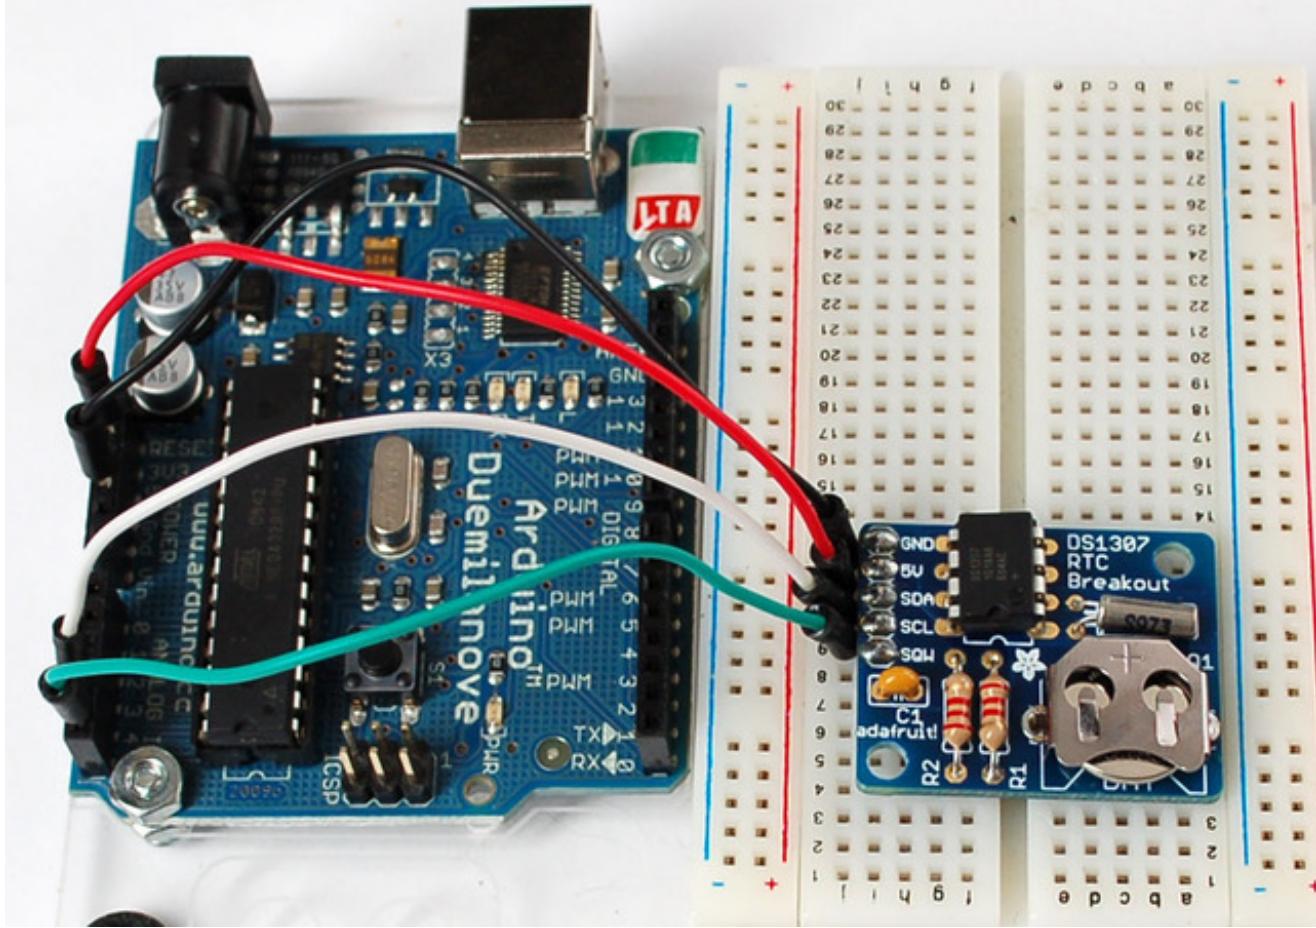


## Fun Plug-in Hack for Arduino UNO

If you set analog pin **A3** to an OUTPUT and HIGH and **A2** to an OUTPUT and LOW you can power the RTC directly from the pins!

Connect Arduino UNO A4 to SDA. Connect Arduino analog pin A5 to SCL.

This only works on an UNO and other ATmega328-based Arduinos!

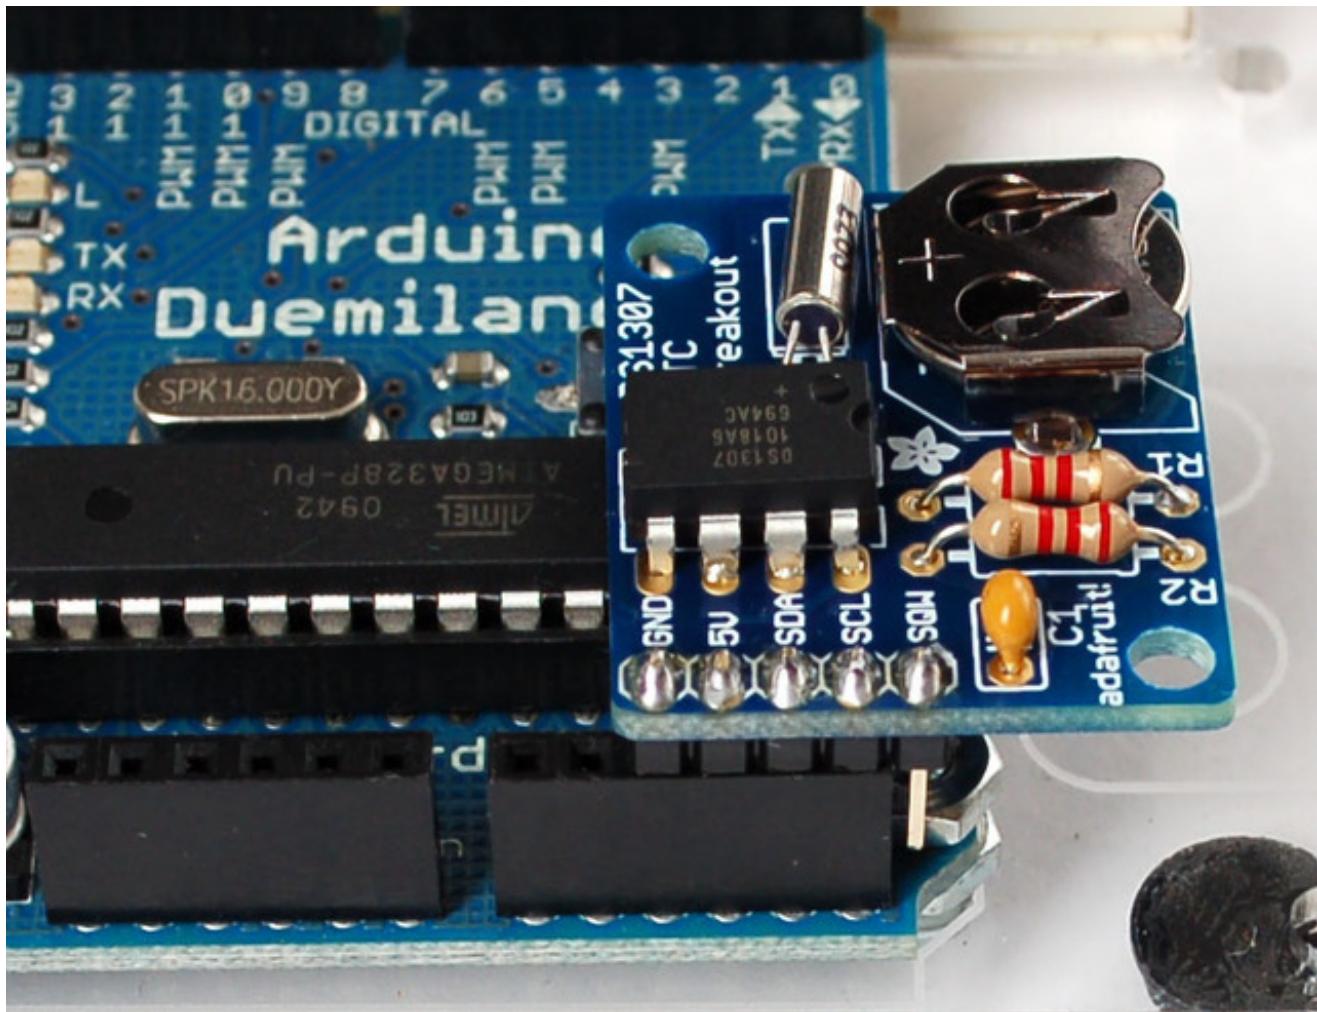


# Understanding the Code


## First RTC Test

The first thing we'll demonstrate is a test sketch that will read the time from the RTC once a second. We'll also show what happens if you remove the battery and replace it since that causes the RTC to halt. So to start, remove the battery from the holder while the Arduino is not powered or plugged into USB. Wait 3 seconds and then replace the battery. This resets the RTC chip. Now load up the following sketch (which is also found in **Examples→RTClib→ds1307**) and upload it to your Arduino with the datalogger shield on!

(Don't forget to install the DS1307 library before running the code below) (<http://adafruit.it/iFm>)

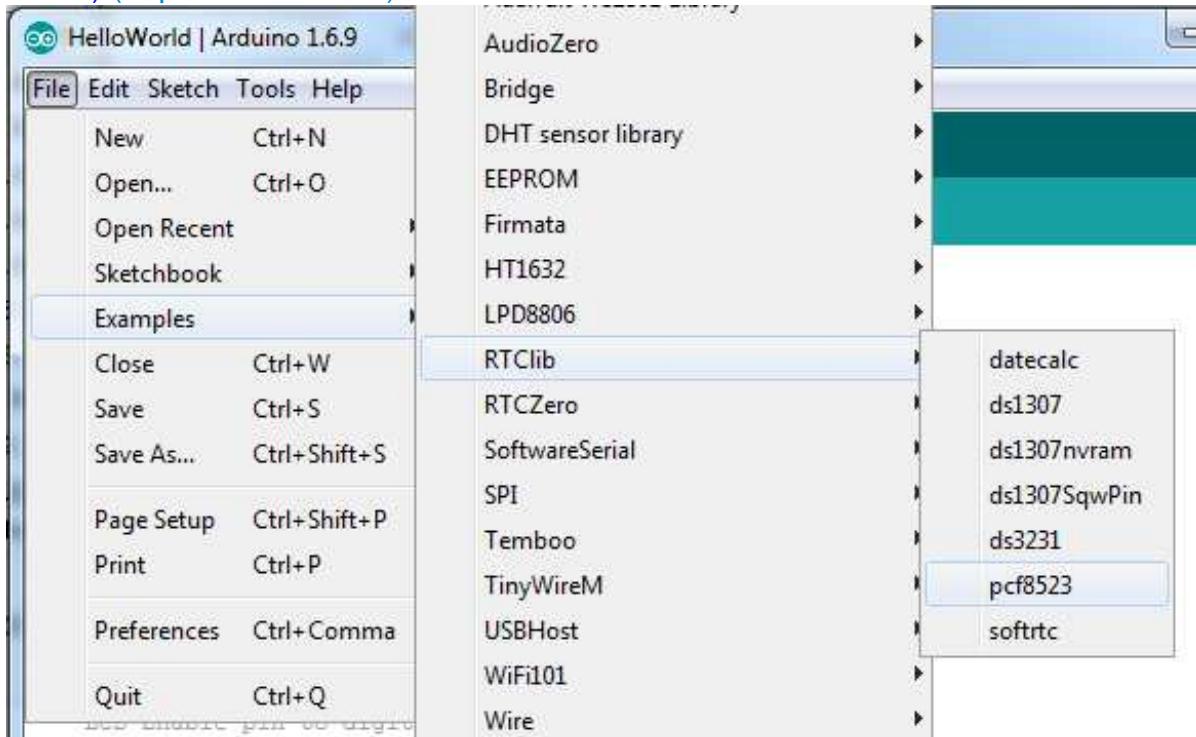

Now open up the Serial Console and make sure the baud rate is set correctly at **57600 baud** you should see the following:

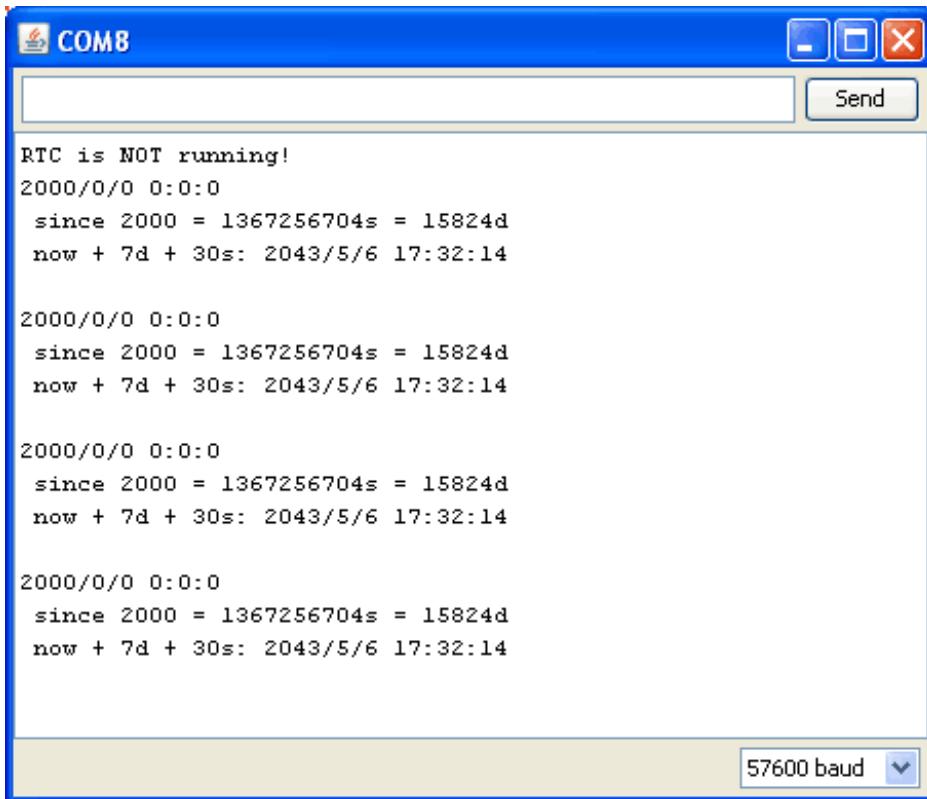

Whenever the RTC chip loses all power (including the backup battery) it will report the time as 0:0:0 and it won't count seconds (its stopped). Whenever you set the time, this will kick start the clock ticking. So basically the upshot here is that you should never ever remove the battery once you've set the time. You shouldn't have to and the battery holder is very snug so unless the board is crushed, the battery wont 'fall out'


## Setting the Time

With the same sketch loaded, uncomment the line that starts with **RTC.adjust** like so:

```
if (! rtc.initialized()) {  
    Serial.println("RTC is NOT running!");  
    // following line sets the RTC to the date & time this sketch was compiled  
    rtc.adjust(DateTime(F(__DATE__), F(__TIME__)));
```

This line is very cute, what it does is take the Date and Time according the computer you're using (right when you compile the code) and uses that to program the RTC. If your computer time is not set right you should fix that first. Then you must press the **Upload** button to compile and then immediately upload. If you compile and then upload later, the clock will be off by that amount of time.

Then open up the Serial monitor window to show that the time has been set.

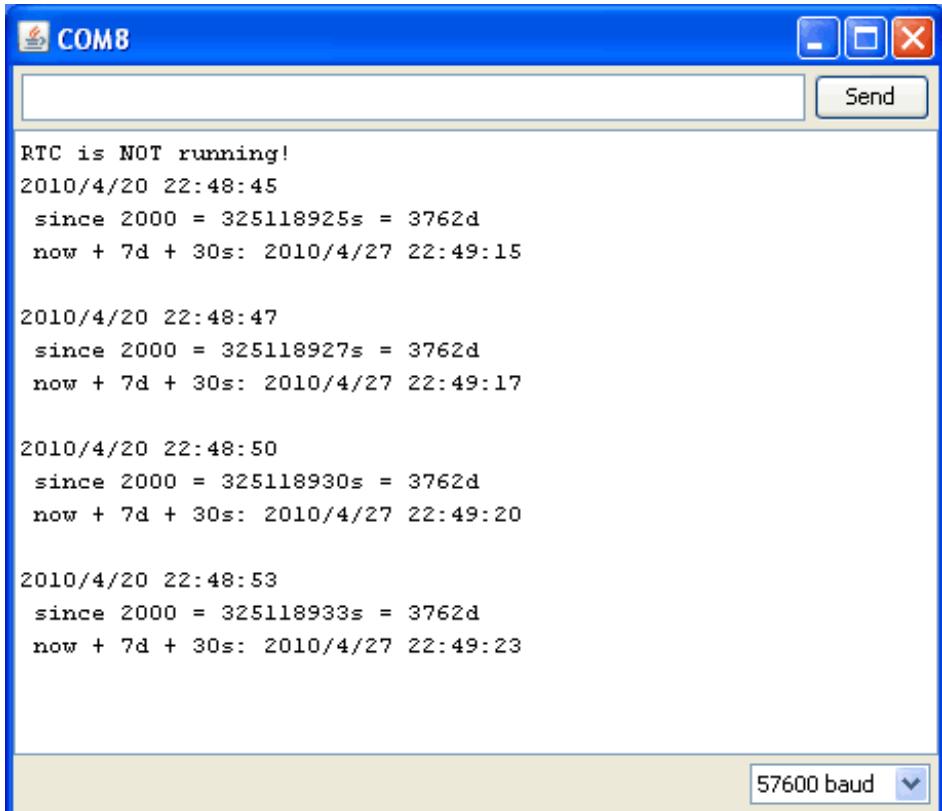

From now on, you wont have to ever set the time again: the battery will last 5 or more years.

## Reading the Time

Now that the RTC is merrily ticking away, we'll want to query it for the time. Lets look at the sketch again to see how this is done.

```
void loop () {
    DateTime now = rtc.now();

    Serial.print(now.year(), DEC);
    Serial.print('/');
    Serial.print(now.month(), DEC);
    Serial.print('/');
    Serial.print(now.day(), DEC);
    Serial.print(" (");

    Serial.print(daysOfTheWeek[now.dayOfTheWeek()]);
    Serial.print(" ");
    Serial.print(now.hour(), DEC);
    Serial.print(":");
    Serial.print(now.minute(), DEC);
    Serial.print(":");
    Serial.print(now.second(), DEC);
    Serial.println();
```

There's pretty much only one way to get the time using the RTClib, which is to call **now()**, a function that returns a DateTime object that describes the year, month, day, hour, minute and second when you called **now()**.

There are some RTC libraries that instead have you call something like **RTC.year()** and **RTC.hour()** to get the current year and hour. However, there's one problem where if you happen to ask for the minute right at **3:14:59** just before the next minute rolls over, and then the second right after the minute rolls over (so at **3:15:00**) you'll see the time as **3:14:00** which is a minute off. If you did it the other way around you could get **3:15:59** - so one minute off in the other direction.

Because this is not an especially unlikely occurrence - particularly if you're querying the time pretty often - we take a 'snapshot' of the time from the RTC all at once and then we can pull it apart into **day()** or **second()** as seen above. Its a tiny bit more effort but we think its worth it to avoid mistakes!

We can also get a 'timestamp' out of the DateTime object by calling **unixtime()** which counts the number of seconds (not counting leapseconds) since midnight, January 1st 1970

```
Serial.print(" since 1970 = ");
Serial.print(now.unixtime());
Serial.print("s = ");
Serial.print(now.unixtime() / 86400L);
Serial.println("d");
```


Since there are  $60 * 60 * 24 = 86400$  seconds in a day, we can easily count days since then as well. This might be useful when you want to keep track of how much time has passed since the last query, making some math a lot easier (like checking if its been 5 minutes later, just see if **unixtime()** has increased by 300, you dont have to worry about hour changes).

# Downloads

## Datasheets & Files

- [EagleCAD PCB files can be found at GitHub \(<http://adafru.it/aX3>\)](http://adafru.it/aX3)
- [Fritzing object available in the Adafruit Fritzing library \(<http://adafru.it/aP3>\)](http://adafru.it/aP3)
- [DS1307 product page \(<http://adafru.it/rec>\)](http://adafru.it/rec)

## Schematic

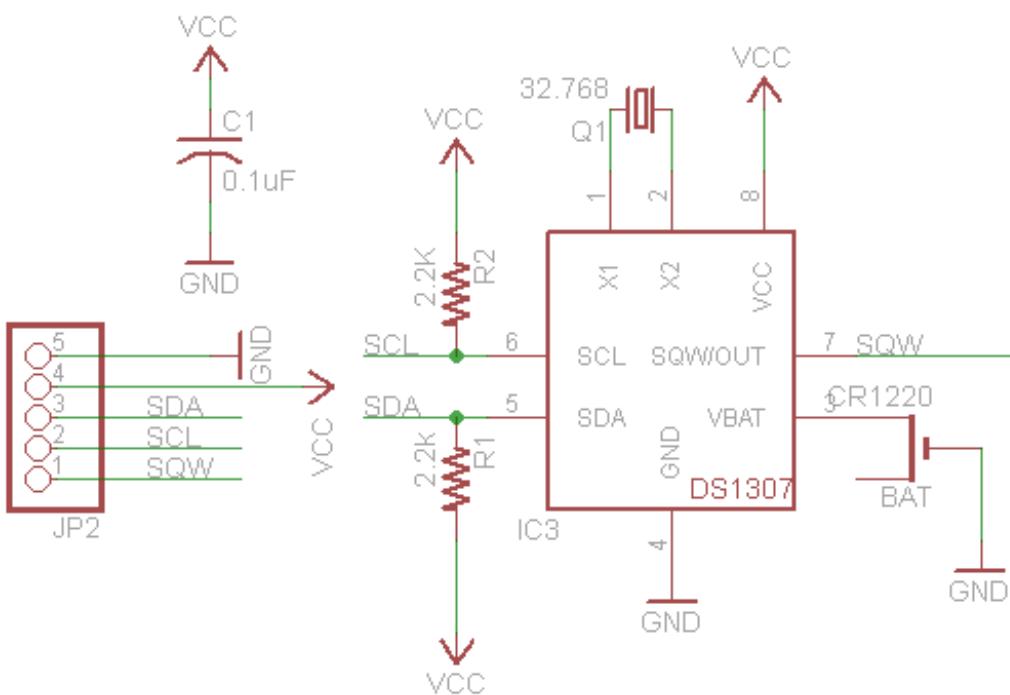

## Fabrication Print

