



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



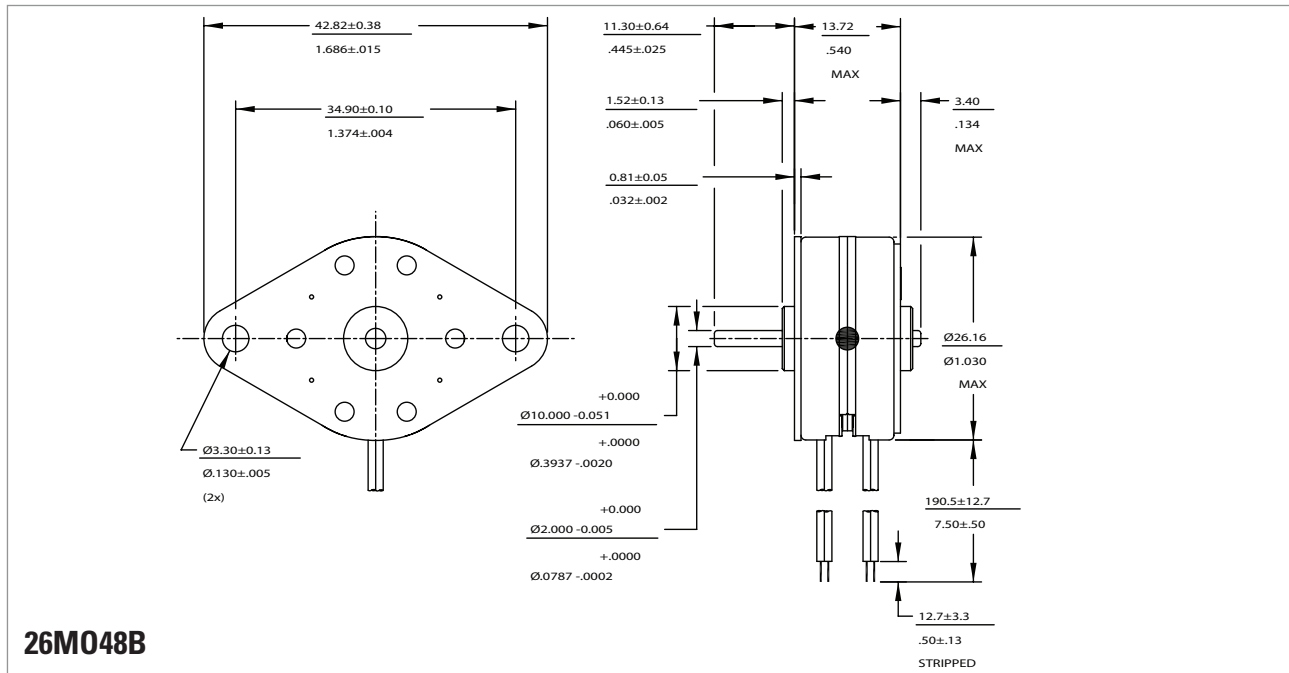




26M048B

Technical Specifications

Part Number	Unipolar		Bipolar		
	26M048B1U	26M048B2U	26M048B1B	26M048B2B	
Rated voltage	(vdc)	5	12	5	12
Resistance per phase ± 10%	(ohms)	19.60	110.00	19.80	108.00
Inductance per phase, Typ	(mH)	5.30	36.50	13.00	60.70
Rated current per phase *	(amps)	0.26	0.11	0.25	0.11
Holding torque, min *	(oz-in / mNm)	1.3 / 9.2		1.5 / 10.6	
Step angle *	(degrees)	7.5 ± 0.5°			
Steps per revolution *		48			
Detent torque, max	(oz-in / mNm)	0.19 / 1.34			
Thermal resistance	(°C / watt)	N.A.			
Rotor moment of inertia	(oz-in-s ² / g-cm ²)	6.01 x 10E-3 / 1.1			
Ambient temperature range					
Operating	(°C)	-20 ~ +70			
Storage	(°C)	-40 ~ +85			
Bearing type		Sintered Bronze Sleeve			
Insulation resistance at 500vdc	(MΩ)	100			
Dielectric withstanding voltage	(vac)	650 for 2 seconds			
Weight	(lb / g)	.075 / 34			
Shaft load ratings, max at 600 rpm					
Radial	(lbs / kg)	.337 / .153			
Axial	(lbs / kg)	.337 / .153			
Leadwires		AWG 28, UL 1429			
Temperature class, max	(°C)	B(130°C)			
RoHS		Compliant			

All motor data values at 25°C unless otherwise specified

* Energise at rated current, 2 phase on

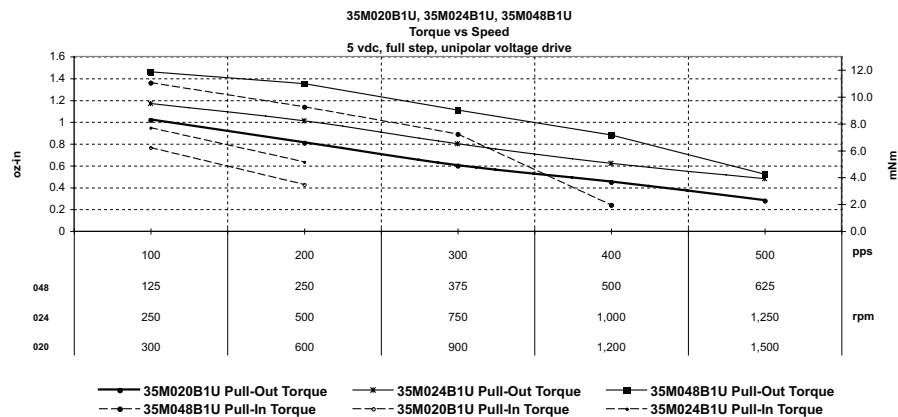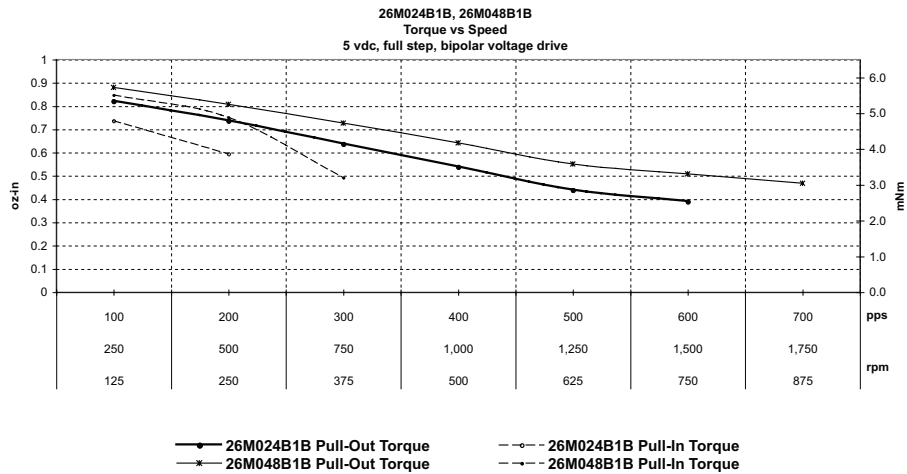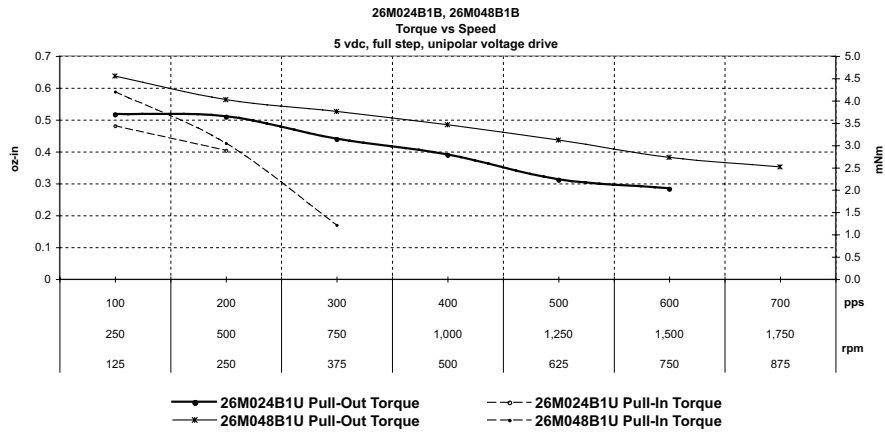

20M & 26M

20M SERIES SYNCHRONOUS MOTOR

Technical Specifications

Part Number		20M600B3A	20M720B3A
Ac operating voltage	(vac)	24.0	24.0
Frequency	(Hz)	50.0	60.0
Speed	(rpm)	600.0	720.0
Direction of rotation	-	Reversible	Reversible
Synchronous torque	(oz-in / mNm)	0.38 / 2.68	0.38 / 2.68
Capacitance	(µF)	2.20	2.20
Rotor moment of inertia	(oz-in-s ² / g-cm ²)	2.24 x 10E-3 / 0.41	
Weight	(lbs / g)	0.052 / 23.5	
Leadwires		AWG 28, UL 1429	
Ambient temperature range	Operating (°C)	-20 ~ +70	
	Storage (°C)	-40 ~ +85	
Bearing type		Sintered Bronze Sleeve	
Insulation resistance at 500vdc	(Mohms)	100	
Dielectric withstanding voltage	(vac)	650 ± 50 VRMS 2 seconds	
Temperature class, max	(°C)	B(130°C)	
RoHS		Compliant	

All motor data values at 25°C unless otherwise specified

* Energise at rated current, 2 phase on

26M SERIES SYNCHRONOUS MOTOR

Technical Specifications


Part Number		26M250B3A	26M250B5A	26M300B3A	26M300B5A
Ac operating voltage	(vac)	24.0	120.0	24.0	120.0
Frequency	(Hz)	50.0	50.0	60.0	60.0
Speed	(rpm)	250.0	250.0	300.0	300.0
Direction of rotation	-	Reversible	Reversible	Reversible	Reversible
Synchronous torque	(oz-in / mNm)	0.89 / 6.25	0.90 / 6.33	0.89 / 6.25	0.90 / 6.33
Capacitance	(µF)	6.80	0.3	6.80	0.330
Rotor moment of inertia	(oz-in-s ² / g-cm ²)	6.01 x 10E-3 / 1.1			
Weight	(lbs / g)	.075 / 34			
Leadwires		AWG 28, UL 1429			
Ambient temperature range	Operating (°C)	-20 ~ +70			
	Storage (°C)	-40 ~ +85			
Bearing type		Sintered Bronze Sleeve			
Insulation resistance at 500vdc	(Mohms)	100			
Dielectric withstanding voltage	(vac)	650 ± 50 VRMS 2 seconds			
Temperature class, max	(°C)	B(130°C)			
RoHS		Compliant			

All motor data values at 25°C unless otherwise specified


* Energise at rated current, 2 phase on

26M-V & 35M-X

26M-V

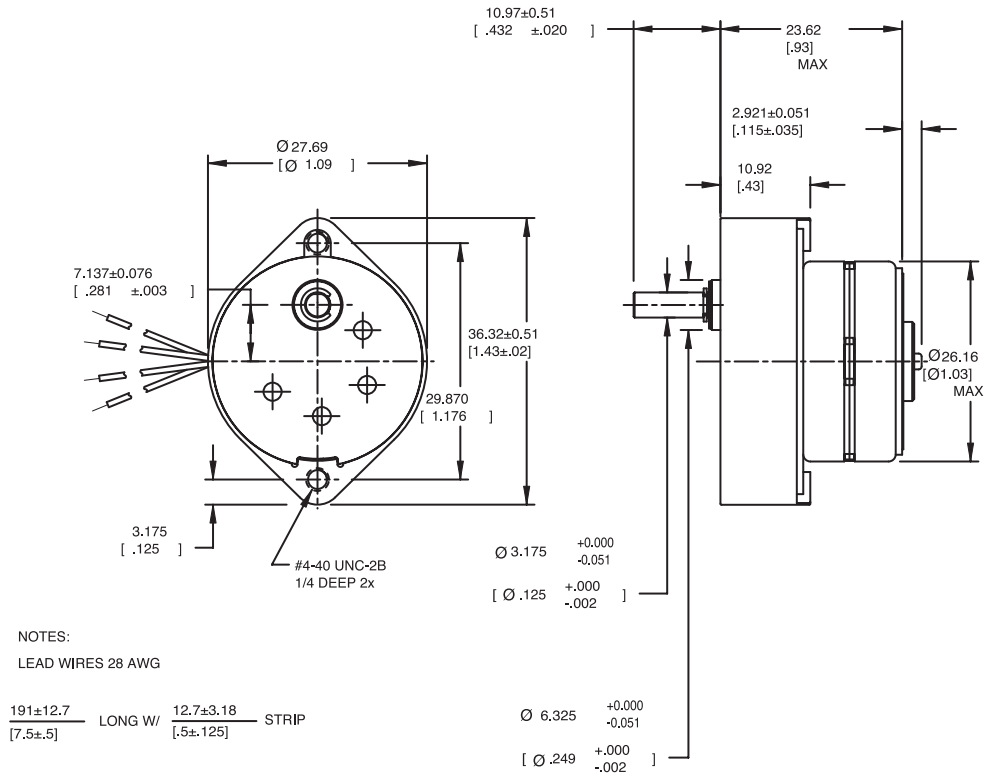

35M-X

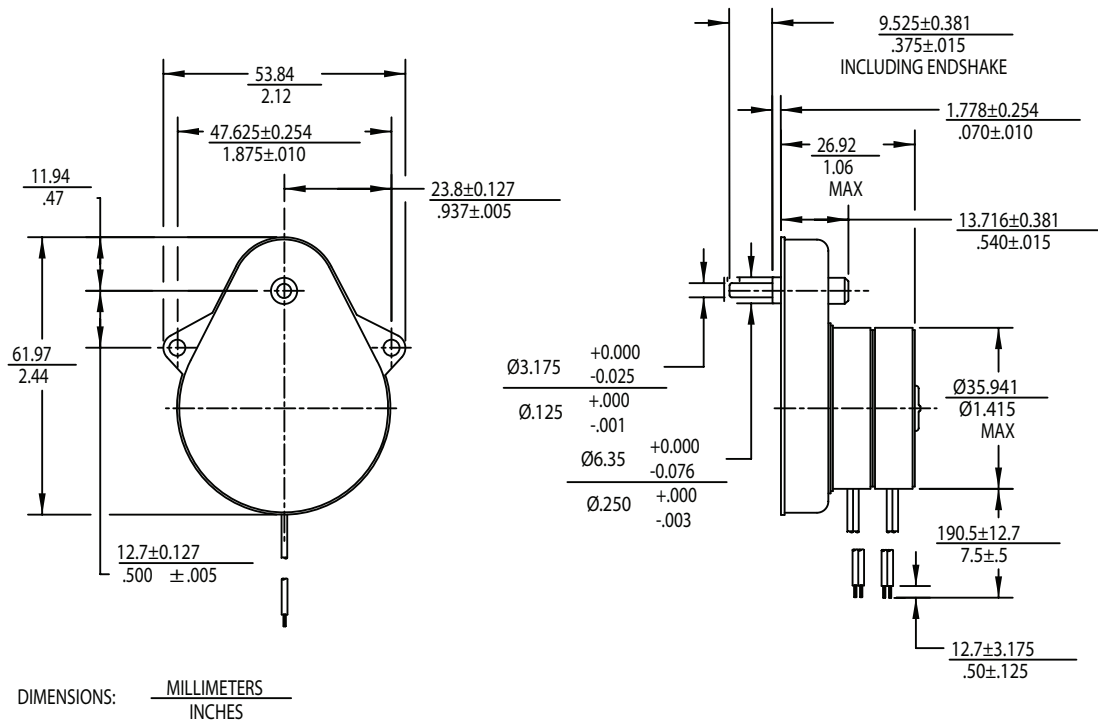

Gear Ratios Available for Can Stack

26M-V GEAR RATIOS

Part suffix	Gear ratio	Efficiency %	Output step angle	Output speed rpm @ 100 PPS*	Running torque @ 100 PPS* oz-in / mN-m
- V 11	2 : 1	90.0%	3.75°	62.50	1.16 / 8.9
- V 16	5 : 1	81.0%	1.5°	25.00	2.41 / 17.01
- V 19	7.5 : 1	73.0%	1.00°	16.66	3.00 / 21.08
- V 21	10 : 1	73.0%	0.75°	12.50	4.00 / 28.24
- V 24	15 : 1	66.0%	0.5°	8.33	5.00 / 35.3
- V 27	20 : 1	66.0%	0.375°	6.25	6.64 / 46.88
- V 31	30 : 1	66.0%	0.25°	4.17	10.00 / 70.6
- V 37	60 : 1	59.0%	0.125°	2.09	16.00 / 112.96

35M-X GEAR RATIOS

Part suffix	Gear ratio	Efficiency %	Output step angle	Output speed rpm @ 240 PPS*	Running torque @ 240 PPS* oz-in / mN-m
- X 24	15 : 1	80.0%	0.500°	20.00	5.0 / 35.30 MAX
- X 27	20 : 1	80.0%	0.375°	15.00	5.0 / 35.30 MAX
- X 31	30 : 1	80.0%	0.250°	10.00	5.0 / 35.30 MAX
- X 37	60 : 1	80.0%	0.125°	5.00	5.0 / 35.30 MAX
- X 39	75 : 1	80.0%	0.100°	4.00	5.0 / 35.30 MAX
- X 45	150 : 1	70.0%	0.050°	2.00	5.0 / 35.30 MAX
- X 52	300 : 1	70.0%	0.025°	1.00	5.0 / 35.30 MAX
- X 64	1350 : 1	65.0%	0.0055°	0.22	5.0 / 35.30 MAX

* Energise at rated current, 2 phase on