



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Inline function terminal - IB IL PB MA-PAC - 2700630

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline PROFIBUS master/slave, for connecting a PROFIBUS system, complete with accessories (connector and marking field), use only with PC Worx

Product Description

The terminal is designed for use within an Inline station.

It can be used to integrate a lower-level PROFIBUS system into the Inline station and therefore into the bus system used.

Within the Inline station, the terminal acts as a PROFIBUS master for the lower-level PROFIBUS system or as a PROFIBUS slave for a higher-level PROFIBUS system.

As a PROFIBUS master, the terminal can be used to integrate standard-compliant PROFIBUS slaves into all INTERBUS or PROFINET-based controllers from Phoenix Contact.

As a PROFIBUS slave, the terminal can be used to integrate a Phoenix Contact controller into any PROFIBUS-based systems (gateway).

PROFIBUS features

- PROFIBUS master/slave
- Transmission speed: 12 Mbps, maximum
- Diagnostic and error messages are exchanged

Local bus features

- 500 kbps and 2 Mbps transmission speed (automatic detection)
- Maximum data width: 32 words

General features

- Serial interface with inserted memory stick for storing the configuration data
- DIP switch for setting the data width
- Direct PROFIBUS configuration in PC Worx
- Integration of process variables using the connection editor
- Integration of third-party devices using GSD


Why buy this product

- ✓ PROFIBUS connection via 9-pos. D-SUB socket
- ✓ Operation as DP master or slave
- ✓ PROFIBUS data transmission speed of 9.6 kbps to 12 Mbps
- ✓ Size of PROFIBUS process image: up to 48 words of input and output data (a maximum of ten PROFIBUS slaves) or 56 words (a maximum of three PROFIBUS slaves)
- ✓ Maximum of ten DP slaves supported when operated as the DP master
- ✓ When operated as the DP slave: device description via GSD file, rotary encoding switch for setting the PROFIBUS address, support for PROFIBUS addresses 1 to 125
- ✓ DIP switch for setting the operating mode, the startup behavior, the data width, and the transmission speed on the local bus
- ✓ Diagnostic and status indicators
- ✓ When operated as the DP master: the configuration data is stored on the memory stick



Key Commercial Data

Inline function terminal - IB IL PB MA-PAC - 2700630

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 046356 598958 |
| GTIN | 4046356598958 |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 48.8 mm |
| Height | 119.8 mm |
| Depth | 71.5 mm |

Connection data

| | |
|-------------------|---------------------|
| Designation | PROFIBUS DP |
| Connection method | 9-pos. D-SUB socket |
| Stripping length | 8 mm |

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -25 °C ... 55 °C |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (operation) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Permissible humidity (storage/transport) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP20 |

General

| | |
|---------------|----------|
| Mounting type | DIN rail |
| Net weight | 142 g |

Interfaces

| | |
|--------------------|-----------------------------|
| Designation | Inline local bus |
| Connection method | Bus base module |
| Transmission speed | 500 kbps / 2 Mbps |
| Interface | PROFIBUS DP V0 master/slave |
| Connection method | 9-pos. D-SUB socket |
| No. of channels | 1 |

Inline potentials

| | |
|---------------------|--------------------------------|
| Designation | Communications power (U_L) |
| Supply voltage | 7.5 V DC (via voltage jumper) |
| Current consumption | typ. 98 mA |
| | max. 280 mA |

Inline function terminal - IB IL PB MA-PAC - 2700630

Technical data

Inline potentials

| | |
|----------------|-------------------------------|
| Designation | Main circuit supply (U_M) |
| Supply voltage | 24 V DC (via voltage jumper) |

Standards and Regulations


| | |
|------------------|--------------------------------------|
| Protection class | III, IEC 61140, EN 61140, VDE 0140-1 |
|------------------|--------------------------------------|

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

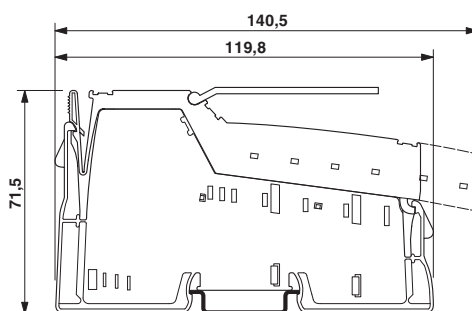

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>