



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Antenna - ANT-OMNI-5900-01 - 2701347

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Omnidirectional antenna, 5 GHz, gain: 5 dBi, polarization: linear, opening angle: h/v 360°/25°, degree of protection: IP64, connection: N (female), incl. mounting bracket and mast clips



Why buy this product

- For medium distances
- For freely mobile applications
- For multipoint or mesh connections

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 739399
GTIN	4046356739399

Technical data

Dimensions

Width	16 mm
Height	130 mm

Ambient conditions

Degree of protection	IP64
Ambient temperature (operation)	-45 °C ... 70 °C
Ambient temperature (storage/transport)	-45 °C ... 70 °C

General

With connecting cable	No
Frequency range	5 GHz
	5.15 GHz ... 5.875 GHz
Horizontal beamwidth	360 °
Vertical beamwidth	25 °

Antenna - ANT-OMNI-5900-01 - 2701347

Technical data

General


Polarization	Linear vertical
Impedance	50 Ω
Gain	5 dBi
Connection method	N (female)
Material	Fiberglass-reinforced plastic (Antenna housing)
	V2A (Bracket)
	V2A (Mast clip)
Mounting type	Mast mounting or wall mounting
External diameter	44 mm ... 95 mm (Mast)

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Schematic diagram

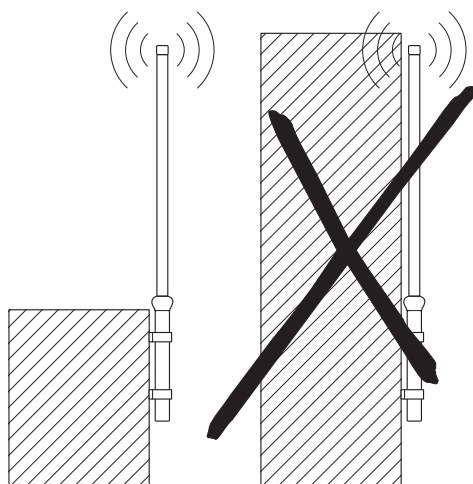

Mounting

Schematic diagram

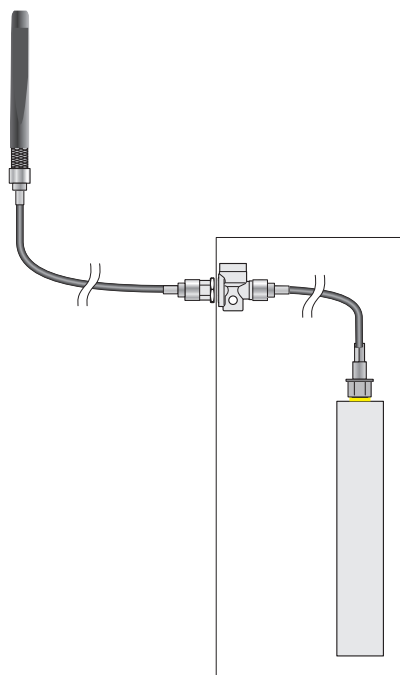

Installation example

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>