



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DIN rail bus connectors - ME 22,5 TBUS 1,5/ 5-ST-3,81 G - 2707437

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Plug component, Nominal current: 8 A, Nominal current (Ex): 8 A, Nominal voltage (Ex): 125 V, Number of positions: 5, Pitch: 3.81 mm, Articles with gold-plated contacts, bus connectors for connecting with electronic housings

Why buy this product



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 911928
GTIN	4017918911928
Weight per Piece (excluding packing)	5.480 g
Custom tariff number	85472000
Country of origin	Germany

Technical data

General

Color	green
-------	-------

Dimensions

Height	20 mm
Pitch	3.81 mm

Technical data

Connection in acc. with standard	CUL
Nominal voltage U_N	150 V
Nominal current I_N	8 A

DIN rail bus connectors - ME 22,5 TBUS 1,5/ 5-ST-3,81 G - 2707437

Technical data

Technical data

Indicator1	CUL1
Flammability rating according to UL 94	V0
Number of positions	5

Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Drilling diagram

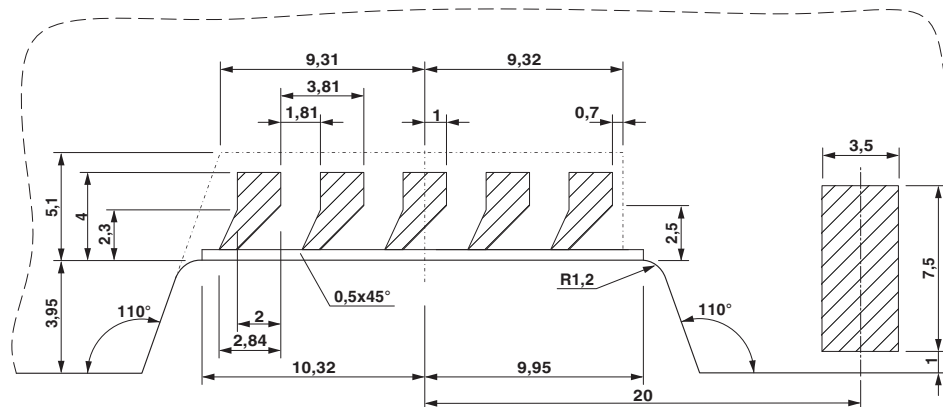

Detailed dimensional drawing of the DIN rail connector contact pads

Approvals

Approvals

Approvals


cUL Recognized / EAC / UL Recognized / UL Recognized / cUL Recognized / cULus Recognized


Ex Approvals


DIN rail bus connectors - ME 22,5 TBUS 1,5/ 5-ST-3,81 G - 2707437


Approvals


Approval details


cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
----------------	---	---	--------------

EAC			EAC-Zulassung
-----	---	--	---------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
---------------	---	---	--------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E118976-20151204
Nominal current IN	8 A		
Nominal voltage UN	150 V		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E118976-20151204
Nominal current IN	6 A		
Nominal voltage UN	150 V		

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---