



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UAK-BE


Discontinued item

Order No.: 2748674



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2748674>

Base element for accommodating surge protection plugs UAK for single-phase power supply units, for mounting on NS 32 and NS 35/7.5, housing width: 17.5 mm

Commercial data	
GTIN (EAN)	 4 017918 062583
Note	Made-to-order
sales group	J037
Pack	10 pcs.
Customs tariff	85363010

Product notes

WEEE/RoHS-compliant since:
06/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Type of connection	Screw connection
--------------------	------------------

Screw thread	M3
Tightening torque, min	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	2.5 mm ²
Conductor cross section stranded max.	0.2 mm ²
Conductor cross section solid min.	4 mm ²
Conductor cross section solid max.	0.2 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Nominal current I _N	26 A
Ambient temperature (operation)	-40 °C ... 80 °C
Housing material	PA
Mounting type	NS 32/NS 35
Degree of protection	IP20

Certificates / Approvals




Certification GOST

Accessories



Item	Designation	Description
Marking		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
2715212	ZB 5,8,LGS:FORTL.ZAHLEN	Zack marker strip, 10-section, printed horizontally: with consecutive numbers, 1-10, 11-20 etc. up to 991-1000, color: white
2715209	ZB 5,8:UNBEDRUCKT	Zack strip, unprinted, strips with 10 labels for individual labeling with M-PEN or CMS system, for terminal block width: 5.8 mm, color: White
Plug/Adapter		
2781576	CS-UFBK	Keying pins for later keying of the base elements without keying belonging to the PLUGTRAB UFBK and UAK product ranges.

Diagrams/Drawings

Dimensioned drawing

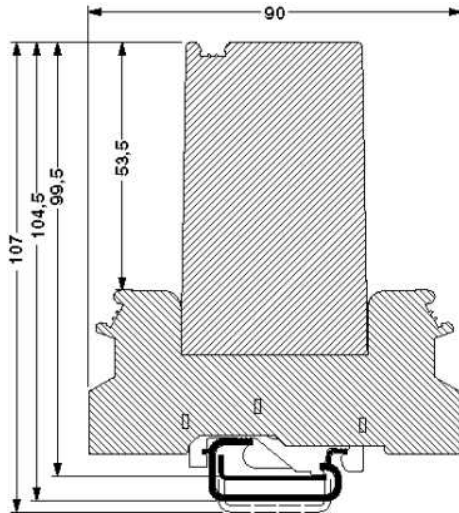

Circuit diagram

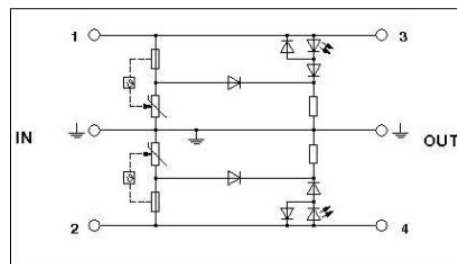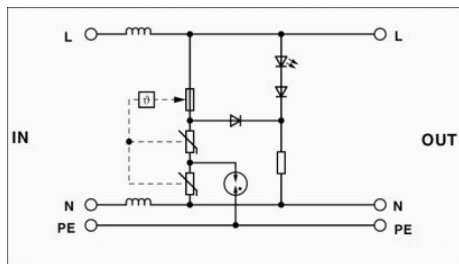

UAK-BE Order No.: 2748674

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2748674>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;