



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


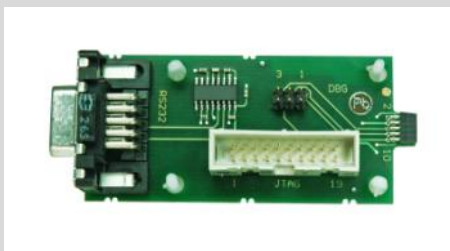


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Adapters

JTAG Adapter (Part No. 27863)		
Dimensions	23 x 22 mm	
IP protection	IP00	
Connections	30 pin ribbon cable (JTAGICE mkII) 10 pin serial connector (2-rowed, 1.27 mm pitch)	
SAM ICE Adapter (Part No. 28337)		
Dimensions	82 mm (with connector) x 35 mm	
IP protection	IP00	
Operating temperature	0°C ... 65°C	
Power supply	over USB	
Connections	RS232, JTAG, deUSB Target	
deRFtoRCB Adapter (Part No. 28216)		
Dimensions	52 x 52 mm	
Control and display elements	3 x LED (red), 1 x button	
Power supply	2 batteries, size AAA (1.8 - 3.6 VDC)	
Connections	2 x 23 pin serial connector (for deRFmega128) 2 x 30 pin I/O connector (for STB) 1 x 10 pin I/O connector (JTAG) 1 x 6 pin I/O connector (Debug/Trace)	
Interfaces	1 x JTAG, 1 x Debug/Trace	
RCB Breakout Board RS232 Cable (Part No. 26790)		
Length	300 mm	
Interfaces	SUB D 9 3 pin serial connector	

