



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Coupling; set consisting of 2 couplings for connecting F-SMA plugs




Why buy this product

- Suitable for fiber types:
 - POF (980/1000 µm)
 - PCF (200/230 µm)
 - GOF MM (50/125µm)
 - GOF SM (9/125µm)



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 118396
GTIN	4017918118396

Technical data

Mechanical characteristics

Connection profile	FSMA
Connection method	Coupling
Color	Bare metallic
Degree of protection	IP20

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Material	Zinc die-cast
Depth	23.5 mm

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Technical data

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Drilling diagram

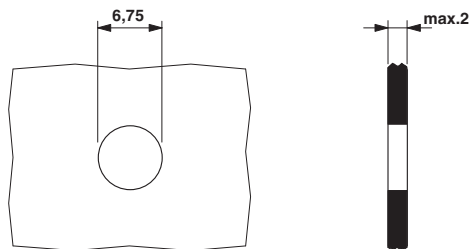

Drilling diagram F-SMA panel feed-through

Dimensional drawing

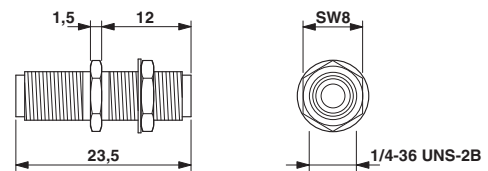

Dimensional drawing F-SMA coupling

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	--	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>