



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## VAL-SQ SP 50-120/208Y

Order No.: 2800493

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2800493>

Surge protection device for 120/208 V AC Wye configurations. Uses a compact, NEMA rated enclosure that connects easily to an existing enclosure. Hybrid Sine Wave Tracking provides 50 kA surge protection.

Commercial data	
GTIN (EAN)	 4 046356 565028
Note	Made-to-order
sales group	J102
Pack	1 pcs.
Customs tariff	85363090
Catalog page information	Page 76 (TT-2011)

### Product notes

WEEE/RoHS-compliant since:  
02/21/2010



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

Surge protective device for 120/208 V AC and 127/220 V AC Wye systems with 50 kA protection

## Technical data

### Standards

Degree of protection	NEMA 4X
Mounting type	3/4 inch NPT male
Design	Parallel hybrid
Ambient temperature (operation)	-40 °C ... 71 °C
Ambient temperature (storage/transport)	-40 °C ... 65 °C
Altitude	3658 m
Message: Surge protection fault	Phase LEDs Audible alarm Remote indicator contact
Direction of action	3L-N & N-GND
Width	250.00 mm
Height	122.00 mm

### Protective circuit

Arrester rated voltage $U_c$	150 V
Response time	< 1 ns

### Connection, protective circuit

Connection method	#10 AWG/5.26 mm <sup>2</sup> wires (24 in./61 cm long) 4-wire + Gnd
Conductor cross section AWG/kcmil min.	10
Conductor cross section AWG/kcmil max	10

### Remote indicator contact

Connection method	#24 AWG/0.205 mm <sup>2</sup> wires (24 in./61 cm long)
Maximum operating voltage $U_{max}$ AC	24 V AC
Maximum operating voltage $U_{max}$ DC	24 V DC
Max. operating current $I_{max}$	2 A

### NEMA / UL data

UL type	type 2
Maximum Continuous Operating Voltage (MCOV without reference direction)	150 V
Voltage protection rating (VPR L-L)	1500 V
Voltage protection rating (VPR L-N)	900 V


Voltage protection rating (VPR L-PE)	1200 V
Voltage protection rating (VPR N-PE)	700 V
Nominal discharge current $I_n$ (without reference direction)	20 kA
Maximum Surge Current per Phase	50 kA
Short-circuit current rating (SCCR)	200 kA
EMI/RFI filtering	-30 dB @ 100 kHz

**Environmental conditions**

Standards/regulations	UL 1449 3 <sup>rd</sup> edition, Sept. 2009
	UL 1283
	IEEE C62.41
	IEEE C62.45

**Diagrams/Drawings**

Circuit diagram

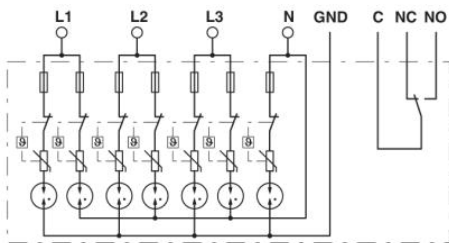

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;