



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Surge protection device - D-LAN-CAT.5-FP - 2800723

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Fine surge protection in accordance with Class D (CAT5), for token ring, ISDN, DS1, Ethernet, and Power over Ethernet (PoE) "Mode A" and "Mode B". RJ45 attachment plug with separate grounding cable and snap-on foot for NS 35 DIN rails.

Why buy this product

- Reliable transmission speeds up to 1 Gbps
- Protective adapter for eight signal paths via RJ45 connector
- Suitable for category 5 data networks



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 730273
GTIN	4046356730273

Technical data

Dimensions

Height	110 mm
Width	28 mm
Depth	60 mm (incl. NS 35 adapter)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	ABS
Flammability rating according to UL 94	V0
Color	gray
Standards for clearances and creepage distances	IEC 60664
Mounting type	Connection-specific attachment plug and DIN rail, 35 mm

Surge protection device - D-LAN-CAT.5-FP - 2800723

Technical data

General

Design	Attachment plug for DIN rail mounting
Number of positions	8
Direction of action	Line-Line & Line-Ground/Shield

Protective circuit

IEC test classification	B2
	C1
VDE requirement class	B2
	C1
Maximum continuous voltage U_C	± 5 V DC
Maximum continuous voltage U_C (wire-wire)	± 5 V DC (± 57 V DC / PoE+)
Nominal current I_N	≤ 1.5 A (25 °C)
Operating effective current I_C at U_C	≤ 600 μ A
Nominal discharge current I_n (8/20) μ s (Core-Core)	350 A
Nominal discharge current I_n (8/20) μ s (core-earth)	350 A
Nominal pulse current I_{an} (10/700) μ s (Core-Core)	≤ 25 A
Nominal pulse current I_{an} (10/700) μ s (Core-Earth)	≤ 25 A
Output voltage limitation at 1 kV/ μ s (core-core) spike	≤ 25 V
	≤ 90 V (PoE)
Output voltage limitation at 1 kV/ μ s (core-earth) spike	≤ 750 V
Output voltage limitation at 1 kV/ μ s (core-core) static	≤ 25 V
Output voltage limitation at 1 kV/ μ s (core-earth) static	≤ 750 V
Residual voltage at I_n (conductor-conductor)	≤ 35 V (C1 - 350 A)
	≤ 110 V (C1 - 350 A)
Residual voltage at I_n (conductor-ground)	≤ 700 V (C1 - 350 A)
Voltage protection level U_p (core-core)	≤ 20 V (B2 - 1 kV / 25 A)
	≤ 90 V (B2 - 1 kV / 25 A - PoE)
	≤ 35 V (C1 - 700 V/350 A)
	≤ 110 V (C1 - 700 V/350 A - PoE)
Voltage protection level U_p (core-ground)	≤ 700 V (B2 - 1 kV / 25 A)
	≤ 700 V (C1 - 700 V/350 A)
Response time t_A (core-core)	≤ 1 ns
Response time t_A (core-earth)	≤ 100 ns
Input attenuation aE, sym.	≤ 1 dB (100 MHz/100 Ω)
Near-end crosstalk attenuation	≤ 63.3 dB (1 MHz/100 Ω)
	≤ 43.6 dB (16 MHz/100 Ω)
	≤ 30.1 dB (100 MHz/100 Ω)
Cut-off frequency f_g (3 dB), sym. in 100 Ohm system	> 100 MHz
Capacity (core-core)	typ. 15 pF (f= 1 MHz / VR= 0 V)
Capacity (core-earth)	typ. 5 pF (f= 1 MHz / VR= 0 V)
Impulse durability (conductor-conductor)	B2 (1 kV/25 A)

Surge protection device - D-LAN-CAT.5-FP - 2800723

Technical data

Protective circuit

	C1 (700 V/350 A)
Impulse durability (conductor-ground)	B2 (1 kV/25 A)
	C1 (700 V/350 A)

Connection data

Connection method	RJ45
Connection method IN	RJ45 socket
Connection method OUT	RJ45 socket

Connection, equipotential bonding


Connection method	Cable connection
-------------------	------------------

Standards and Regulations


Standards/specifications	IEC 61643-21/A1 2008
	GB/T 18802.21 2004
	EN 61643-21/A1 2009

Drawings

Dimensional drawing

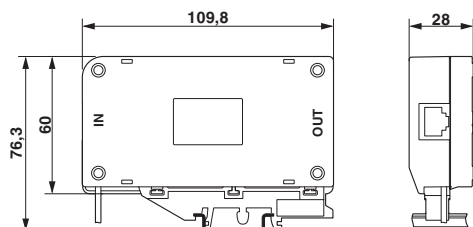

Circuit diagram

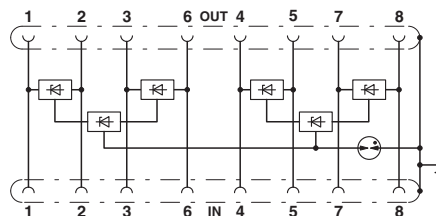

Approvals

Approvals

Approvals

UL Listed / EAC / EAC


Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 138168
-----------	--	---	---------------

Surge protection device - D-LAN-CAT.5-FP - 2800723

Approvals

EAC		EAC-Zulassung
-----	---	---------------

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>