



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Protective plug PT with surge voltage equipment protection for power supply units, visual fault warning. Nominal voltage: 120 V AC

The illustration shows version PT 2-PE/S-230 AC-ST

Why buy this product

- Plugs can be checked with CHECKMASTER
- Tool-free plug replacement
- With floating remote indication contact
- DIN rail module
- Consists of base element and plug
- For single and multi-phase power supply units
- Optical signaling of disconnection via LED



Key commercial data

Packing unit	1
Minimum order quantity	10
Catalog page	Page 52 (TT-2011)
GTIN	 4 017918 182533
Custom tariff number	85363090
Country of origin	GERMANY

Technical data

Standards

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black
Standards for air and creepage distances	DIN VDE 0110-1
Standards for air and creepage distances	IEC 60664-1
Surge voltage category	III

Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Technical data

Standards

Pollution degree	2
Degree of protection	IP20
Design	DIN rail module, two-section, divisible
Mounting type	On base element
Number of positions	2
Ambient temperature (operation)	-40 °C ... 85 °C (non-EX)
Ambient temperature (operation)	-40 °C ... 80 °C (Class I Div. 2 Gr. A, B, C, D)
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00
Direction of action	1L-N & N-PE
Width	17.7 mm
Height	45 mm
Depth	52 mm
Pitch unit	1 Div.

Protective circuit

IEC category	III
IEC category	T3
EN type	T3
Nominal voltage UN	120 V AC
Arrester rated voltage UC	150 V AC
Nominal frequency fN	50 Hz
Nominal frequency fN	60 Hz
Nominal current IN	26 A (30 °C)
Operating effective current IC at UC	≤ 1.1 mA
Ground conductor current IPE	≤ 2 µA
Nominal discharge surge current In (8/20) µs	2.5 kA
Combined surge UOC	6 kV
Protection level UP (L-N)	≤ 620 V
Protection level UP (L-PE)	≤ 850 V
Protection level UP (N-PE)	≤ 850 V
Residual voltage at In, (L-N)	≤ 620 V
Residual voltage at In, (L-PE)	≤ 330 V
Residual voltage at In, (N-PE)	≤ 330 V
Response time tA (L-N)	≤ 25 ns
Response time tA (L-PE)	≤ 100 ns
Response time tA (N-PE)	≤ 100 ns
Max. required back-up fuse	25 A (gL)
Max. required back-up fuse	25 A (MCB 25 A B/C)
Short-circuit resistance IP with max. backup fuse (effective)	1.5 kA
Message: Surge protection fault	Optical, remote indicator contact

Standards

Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Technical data

Standards

Standard - Electrical safety	IEC 61643-1 2005
Standard - Electrical safety	EN 61643-11/A11 2007
Standard - Electrical safety	UL 1449 ed. 2

Classifications

eclass

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130806
eCl@ss 7.0	27130806

etim

ETIM 2.0	EC000942
ETIM 3.0	EC000942
ETIM 4.0	EC000942

unspsc

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

UL Recognized / KEMA-KEUR / ÖVE / cUL Recognized / GOST / CSA / CCA / IECCE CB Scheme / cULus Recognized

Ex Approvals


UL Recognized / cUL Recognized / cULus

Approvals submitted

Approval details

Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Approvals

UL Recognized 

KEMA-KEUR 

ÖVE 


cUL Recognized 

GOST 

CSA

CCA

IECEE CB Scheme

cULus Recognized 

Accessories

Accessories

Marking

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Accessories

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.1 x 5.2 mm

Zack Marker strip, flat - ZBF 5/WH-100:UNBEDRUCKT - 0808668



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Consecutive numbers 2 - 20, 22 - 40, etc. up to 82 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, Labeled, Printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Type 3 surge protection connector - PT 2-PE/S-120AC-ST - 2839334

Accessories

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, Labeled, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Necessary add-on products


Type 3 surge protection base element - PT-BE/FM - 2839282



Base element for protective plug PT, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Drawings

Dimensioned drawing

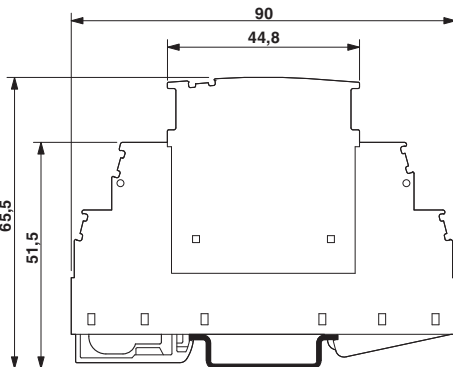

The figure shows the complete module consisting of a base element and connector

Circuit diagram

