# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Base element for protective plug PT with protective circuit for a 4-wire floating signal circuit, bridge between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

### **Product Features**

- ☑ Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- ☑ Base element remains an integral part of the installation
- ☑ Consistent plug-in signal circuit protection
- Impedance-neutral disconnection of plug for test and maintenance purposes



### Key commercial data

| Packing unit                         | 1 pc     |
|--------------------------------------|----------|
| Weight per Piece (excluding packing) | 54.9 GRM |
| Custom tariff number                 | 85363010 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

| Height                 | 89.8 mm |
|------------------------|---------|
| Width                  | 17.7 mm |
| Depth                  | 52 mm   |
| Horizontal pitch       | 1 Div.  |
| Complete module height | 90 mm   |
| Complete module width  | 17.7 mm |
| Complete module depth  | 65.5 mm |
| Ambient conditions     |         |

| Ambient temperature (operation) | -40 °C 85 °C |
|---------------------------------|--------------|
|                                 |              |



# Technical data

### Ambient conditions

| Degree of protection                    | IP20                                    |
|---|---|
| General                                 |   |
| Housing material                        | PA 6.6                                  |
| Inflammability class according to UL 94 | V0                                      |
| Color                                   | black                                   |
| Mounting type                           | DIN rail: 35 mm                         |
| Туре                                    | DIN rail module, two-section, divisible |
| Protective circuit                      |   |
| Surge protection fault message          | None                                    |
| Connection data                         |   |
| Connection method                       | Screw connection                        |
| Connection type IN                      | Screw terminal blocks                   |
| Connection type OUT                     | Screw terminal blocks                   |
| Screw thread                            | M3                                      |
| Tightening torque                       | 0.5 Nm                                  |
| Stripping length                        | 8 mm                                    |
| Conductor cross section stranded min.   | 0.2 mm <sup>2</sup>                     |
| Conductor cross section stranded max.   | 2.5 mm <sup>2</sup>                     |
| Conductor cross section solid min.      | 0.2 mm <sup>2</sup>                     |
| Conductor cross section solid max.      | 4 mm <sup>2</sup>                       |
| Conductor cross section AWG/kcmil min.  | 24                                      |
| Conductor cross section AWG/kcmil max   | 12                                      |

### Standards and Regulations

| Standards/regulations | IEC 61643-21    |
|-----------------------|-----------------|
|                       | DIN EN 61643-21 |

# Classifications

# eCl@ss

| eCl@ss 4.0 | 27140201 |
|------------|----------|
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130803 |
| eCl@ss 7.0 | 27130803 |



# Classifications

eCl@ss

| eCl@ss 8.0 | 27130803 |
|------------|----------|
| FTIM       |          |

#### ETIM

| ETIM 2.0 | EC000472 |
|----------|----------|
| ETIM 3.0 | EC000472 |
| ETIM 4.0 | EC000472 |
| ETIM 5.0 | EC000472 |

### UNSPSC

| UNSPSC 6.01   | 30212010 |
|---------------|----------|
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |

# Approvals

### Approvals

#### Approvals

UL Listed / GOST / GL

#### Ex Approvals

UL Listed / cUL Listed / ATEX / cULus Listed

Approvals submitted

### Approval details

UL Listed 🖲

GOST 📀


08/06/2014 Page 3 / 4



Approvals


GL

### Drawings

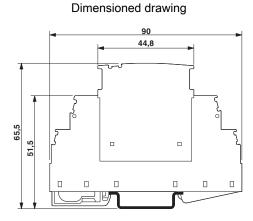

The figure shows the complete module consisting of a base element and connector

Application drawing

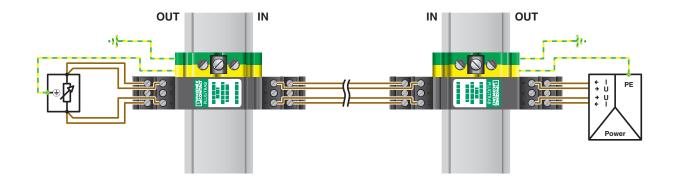

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com